



Top Manufacturer of Rockwool & Glasswool for 20 years



Rockwool Board



Rockwool Blanket



Glasswool Board



Glasswool Blanket



Rockwool & Glasswool

Jinan United Perfect Building Materials Corporation

QUALITY IS OUR CULTURE



Leading Manufacturer of Rock Wool & Glass Wool

For the past years since it was set up, Jinan United Perfect Building Materials Corporation has been manufacturing and distributing top quality rock wool and glass wool for energy efficiency and climate control.

Our company has gained certificates of FM, CE, TUV, CCS, ISO9001 certificates are got to guarantee the quality and develop the market. Based on mutual trust and win-win policy, we are pleased to establish long-term cooperation with customers from America, Germany, India, Malaysia, Vietnam, Argentina, Brazil, Greece, etc.

We are committed to provide the Earth with a better and greener tomorrow by putting a stop to climate change.

Advanced Production Lines



Professional Laboratory to Keep Quality



Certificates



Rock Wool Insulation Series

Rock wool products have excellent performance on thermal insulation, fireproofing, sound absorption and noise reduction, are widely used in commercial and industrial insulation areas as insulation for houses, office buildings, power plants, petrochemical plants, refineries, ship building industries and even agricultural cultivation etc.



Rock Wool Board




Rock wool board is mainly used for fireproofing and sound absorption of partition walls and curtain walls, thermal insulation of roofs, retaining structures and geothermal systems as well as thermal insulation and fireproofing of industrial kilns, ovens, large sized tanks and vessels, etc.

Rock Wool Board Standard Specification

No.	Length (mm)	Width (mm)	Thickness (mm)	Density (kg/m ³)
1	1200	600	25-30	80-220
2	1200	600	40	70-220
3	1200	600	50	40-220
4	1200	600	60-100	40-200
5	1200	600	110-190	40-180

Rock Wool Board with Lamination Foils

We can laminate single sided or double sided aluminum foil, glass fiber tissue or aluminum glass cloth foil etc.

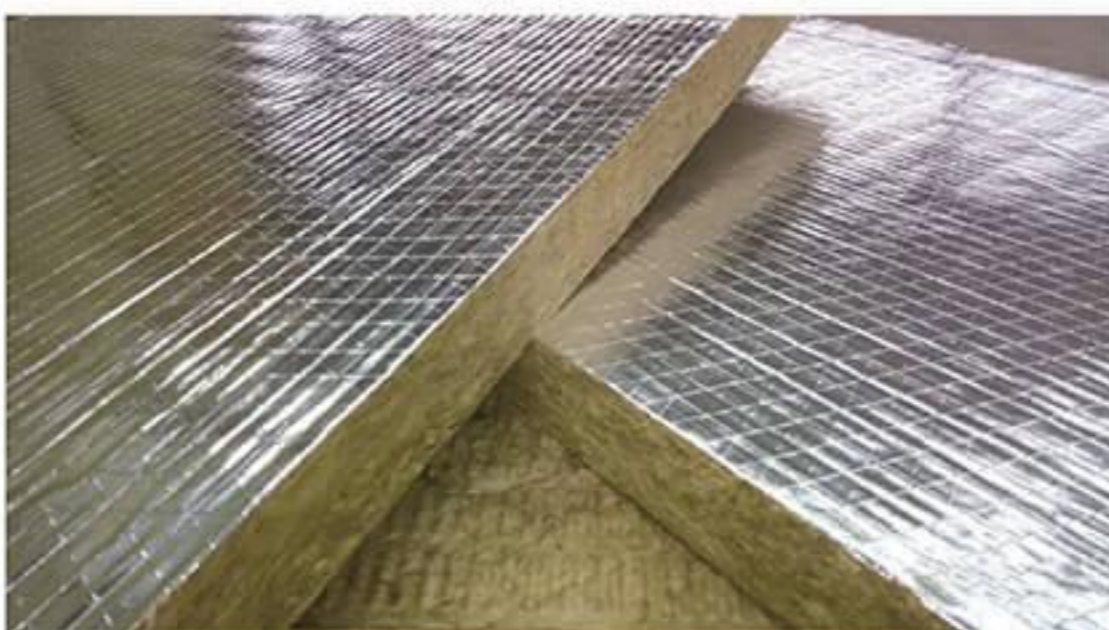

Rock Wool Blanket




Rockwool Blanket Standard Specification

No.	Length (mm)	Width (mm)	Thickness (mm)	Density (kg/m3)
1	3000-5000	600, 1200	30	80-100
2	3000-5000	600, 1200	40	70-100
3	3000-5000	600, 1200	50	60-100
4	3000	600, 1200	60-80	60-100
5	3000	600, 1200	90-100	50-100

Rock wool blanket is a kind of soft and roll product, which is mainly used for heat preservation of steel roofing, large-caliber pipe line, storage tank, large-scale equipment, irregular thing, valve and pipe joint, especially applicable for heat insulation of high-temperature equipments.


Rock Wool Blanket with Lamination

We can laminate foils, wire mesh, glass fiber tissue, aluminum glass cloth etc.

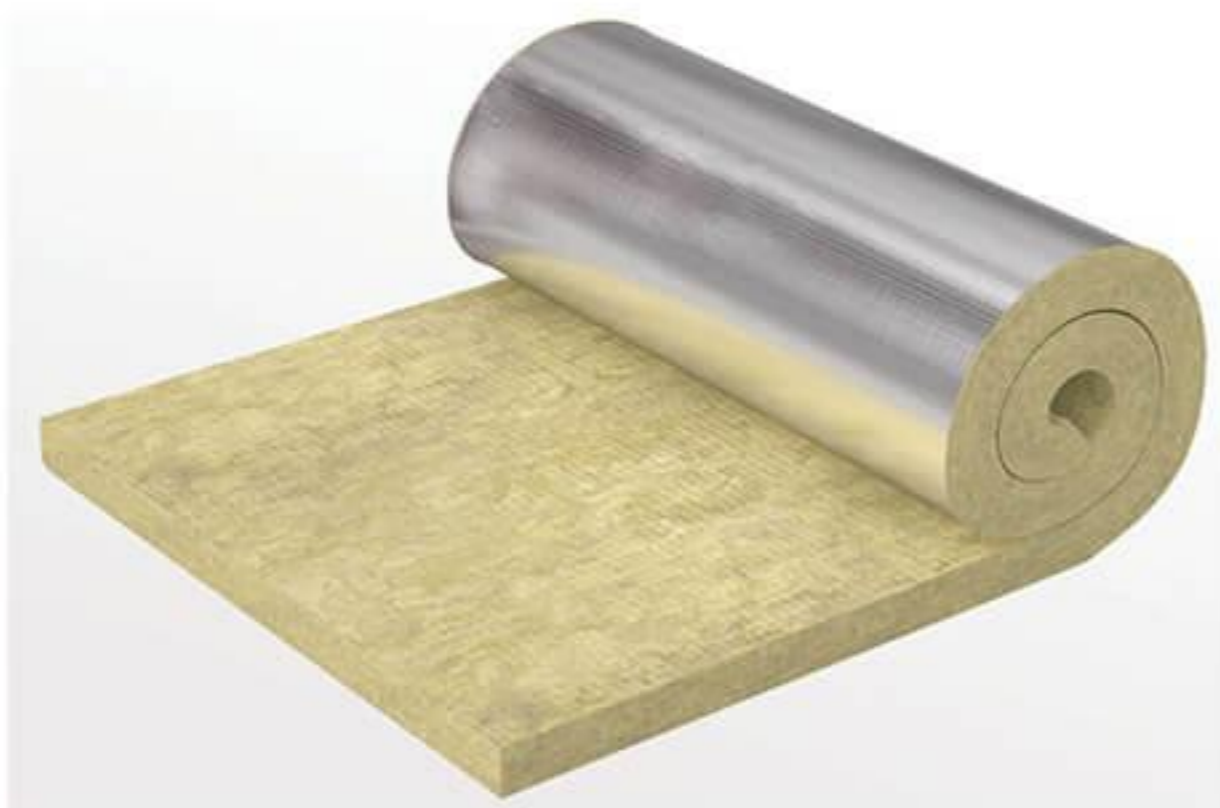

Rock Wool Pipe Section

Rock wool pipe section is made through some mould and cured by high temperature. It is widely applied to insulation of various industrial boilers and equipment pipelines, such as petroleum, chemical industry, metallurgy, shipbuilding, textile, etc. Water-proof rock wool pipe section has special function of moisture-proof, temperature reduction etc.

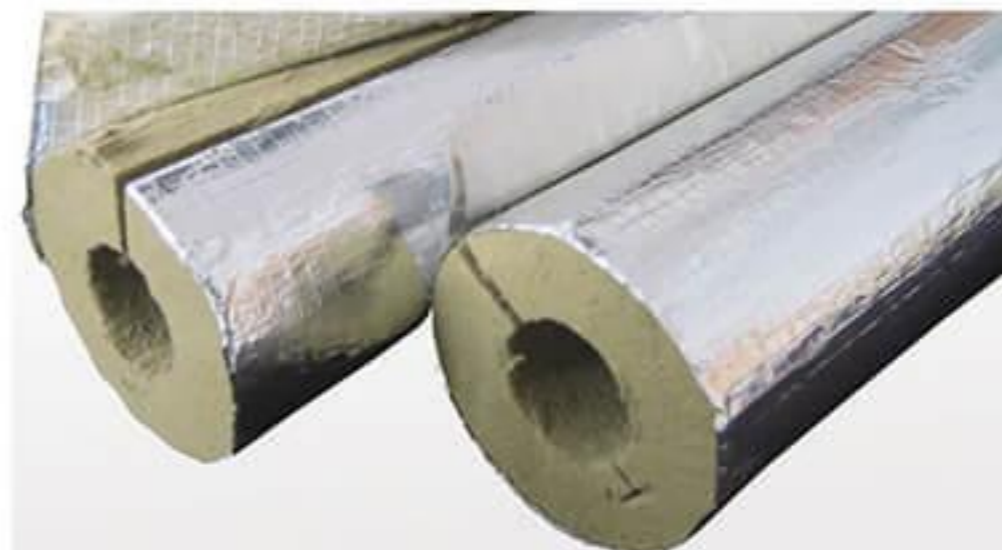

Glass Wool Insulation Series

We have nine glass wool production lines with annual output of 110,000 tons. Our glass wool products are free of asbestos and do not apply any composition harmful to environments such as CFCs, HCFCs and HFCs etc.



Glass Wool Blanket




Glass wool blanket has the performance of thermal insulation, noise absorption and acoustical isolation, especially for middle or low frequency sound, which can cancel the noise and improve working environment.

Standard Specification


Item	Unit	Index
Density	kg/m ³	10-50
Thickness	mm	25-200
Width	mm	60-1220
Length	mm	10000-30000

Glass Wool Blanket with Lamination Foils

According to customer requirements, the product can be laminated with single sided or double-sided aluminum foil, aluminum glass cloth foil, black glass fiber tissue, WPSK etc.

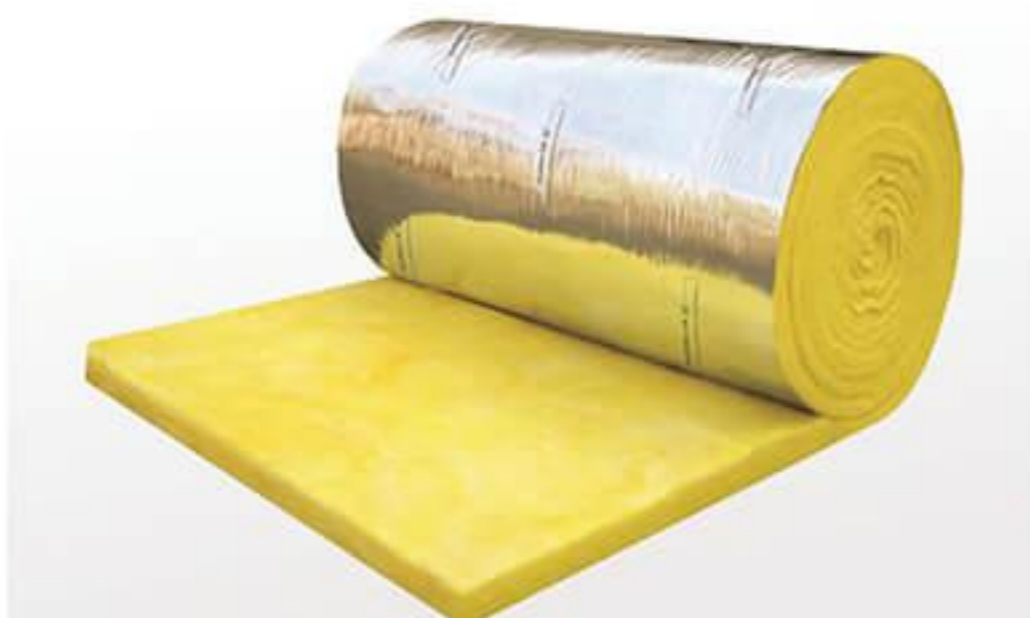

Glass Wool Board

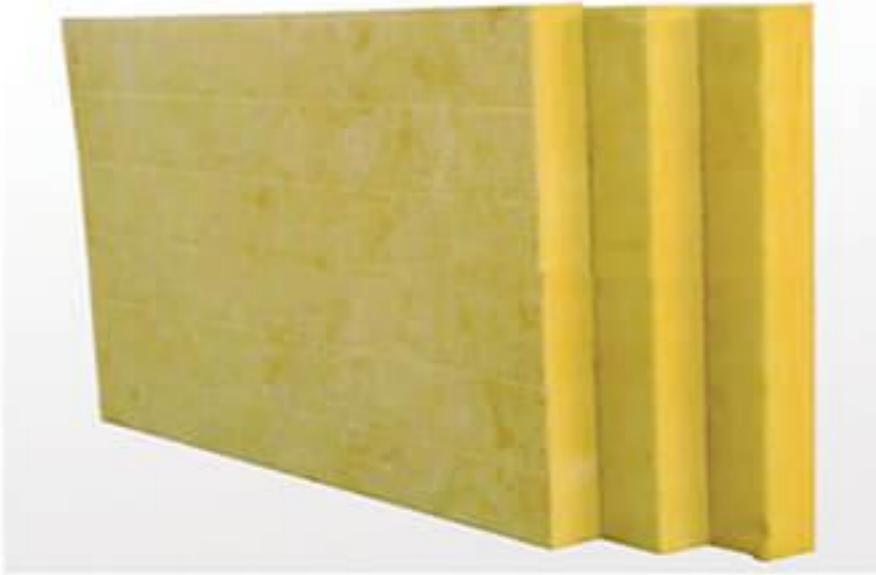


Standard Specification

Item	Unit	Index
Density	kg/m ³	24-200
Thickness	mm	5-100
Width	mm	60-1220
Length	mm	1200-2400

Glass wool board is mainly used for separating wall in the high-grade building, ceiling, air conduct or inner wall of bellows for thermal insurance, or machine shops for noise absorption or metal ceiling for control of heat, moisture etc.

Glass Wool Board with Lamination

According to customer requirements, the product can be laminated with single sided or double-sided aluminum foil, aluminum glass cloth foil, black glass fiber tissue, WPSK etc.

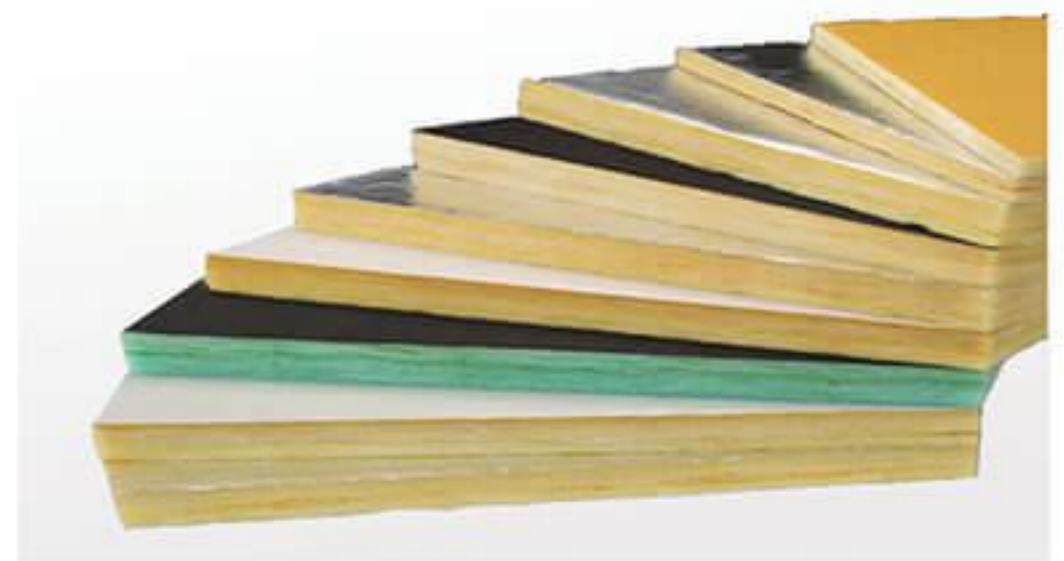

Glass Wool Pipe Section



Standard Specification

Item	Unit	Index
Density	kg/m ³	48-80
Diameter	mm	18mm-592mm (3/4'-21')
Thickness	mm	25-90
Length	mm	1000, 1200

Glass wool pipe section is widely used in building, heating power pipes, air conditioning and refrigerators for thermal insurance, such as hot water and steam pipes, electric power, petroleum, chemical industries. Facings like alum foil, WPSK etc. can be applied to the surface for preventing moisture and radiation protection.

Packing & Loading



Rock Wool Insulation



Glass Wool Insulation

We value every chance to cooperate with you.

Jinan United Perfect Building Materials Corporation is the sub-company of Global Perfect Building Materials Group. Our group covers the production and distribution of thermal insulation (rock wool & glass wool), lamination products, acoustic panels and ceilings (made of fiber glass and polyester), water-proof products for customers with a range of environmentally sustainable products that can make your home, office or factory more comfortable and energy efficient.





Advanced Production Lines

Professional Management

Strict Quality Control

Best Reasonable Price

7 Days Delivery Time

7-24 Service hot-line

Jinan United Perfect Building Materials Corporation

+86-531 8190 1621 +86-531 8281 4295

24 hours hotline: +86 134 2613 0536

www.unitedperfect.com

export@unitedperfect.com

No.57 Industrial South Street, Jinan, Shandong, China. 250100

