

SPECIFICATION

Overall Length: 2100mm; Width 500mm
 Head Section: 250×500mm;
 Back Section: 465×500mm
 Kidney Bridge: 75×500mm;
 Seat section: 630×500mm
 Leg Section: 600×240mm
 Min Height: 700mm;
 Max Height: 1150mm
 Adjust: 450mm
 Reversed Trendelenburg ≥ 30°;
 Trendelenburg ≥ 25°
 Lateral Tilt ≥ 25°
 Backward and Forward Movements ≥ 530mm
 Adjustment of sections:
 Head Section Raised from the horizontal ≥ 45°
 Head Section lowered from the horizontal ≥ 90°
 Back Section Raised from the horizontal ≥ 75°
 Back Section Lowered from the horizontal ≥ 30°
 Leg Section Lowered from the horizontal ≥ 90°
 Leg section opened ≥ 90°
 Kidney Bridge Elevated (When optional) ≥ 80mm
 Battery capacity ≥ 2.4AH
 138×70×86

ELECTRIC HYDRAULIC OPERAITANG TABLE ECOH001E-1



SPECIFICATION

Table Length: 2050mm
 Table Width: 520mm
 Lowest Height: 700 ± 20mm
 Height Adjustment: 350mm
 Trendelenburg: 30°
 Rev-Trend: 30°
 Tilt: (left) 20°
 Tilt: (right) 20°
 Backboard Upwards: 75°
 Backboard Downwards: 35°
 Legboard Downwards: 90°
 Legboard Outwards: 90°
 Headboard Upwards: 46°
 Kidney Elevator: 120mm
 Head Board: Dismountable
 Leg Board: Dismountable

ELECTRIC HYDRAULIC OPERAITANG TABLE ECOH001E-2



DT-12C ELECTROMOTION OPERATING TABLE



With battery and Automatic charging device

SPECIFICATION

Power: 220/240VAC, 50/60Hz, 660VA
 Table top size (including head board): 2000mm (L) X 500mm (W)
 Height range (Dot not include mattress): 925-725mm
 Head board (up/off): 30° / 90°
 Leg board (up/down): 15° / 90°
 Leg board (extendable): 0° / 180°
 Board board (up/down): 85° / 12°
 Reversed Trendelenburg / Trendelenburg: 20° / 20°
 Left/Right inclining angle: 20° / 20°
 Longitudinally auto moved: 300 ± 10mm (Maximum)
 Kidney Range: 110mm

HYDRAULIC MANUAL OPERATING TABLE 1088



SPECIFICATION

Table height: 760mm~1010mm
 Length and width: 2010mmx500mm
 Reversed Trendelenburg/Trendelenburg: 22°
 Lateral Tilt (Left/Right): 20°
 Head rest (up/down): 60°/70°
 Back rest (up/down): 75°/15°
 Foot Board (up/down&outward): 15°/85°/90°
 Kidney Bridge up (Optional): 120mm

SPECIFICATION

Table height: 690mm~1100mm
 Length and width: 1960mmx500mm
 Reversed Trendelenburg/
 Trendelenburg: 30°
 Lateral Tilt (Left/Right): 20°
 Head rest(up/down):40°/90°
 Back rest (up/down): 90°/40°
 FootBoard(up/down&horizontal position):15°/90°/90°
 Longitudinal Sliding: 350mm
 Kidney bridge range: 120mm
 Power: 110~220v/50~60Hz; 1.0kW
 Load capacity: 250kg
 Battery Specification: 12Volt 9Ah

DT-12E Electric hydraulic Operating Table



DESCRIPTION

- :: **With reference** to the advantages of congener products from home and abroad, can meet the demands of different positions on operation.
- :: **24V battery** that meets the operating demands for one week, better ensure the table work under safe voltage.
- :: **Electromotion** facilitates the various adjustments of positions; intellectualized reposition enables the table a quick return to horizontal position.
- :: **Automatically** lockable remote control in case of wrong operation.
- :: **Large-scale** elevation makes it easier for C-arm fluoroscopy examination.
- :: **With built-in kidney** bridge suit for kidney operation.
- :: **Optional traction** for orthopedics, head rest for Aural surgery, extend functions of the table
- :: **The cover** all adopted premium 304 stainless steel, the main body used cast aluminum, anti-rust and corrosion the tabletop adopted phenol aldehyde Photograph board which is suitable for X-Ray.
- :: **Key parts**, such as electrical pump and electromagnetic valve, adopted imported products from Taiwan.

SPECIFICATION

ELECTRIC HYDRAULIC OPERAITANG TABLE DT-12E(S)



Tabletop Length/width: 2170/550mm
 Tabletop Elevation(up/down): 1100/690mm
 Trendelenburg/Anti-tredelenburg: 30°/30°
 lateral tilt: 20°/20°
 Head plate adjustment: Head plate adjustment
 Leg plate adjustment: up:15°,down:90°,outward:90°
 Back plate adjustment: +90°/-40°
 Sliding: 350mm
 Kidney Bridge: 110mm
 flex:reflex: reflex: 250°

Table height: 690mm~1100mm
 Length and width: 1970mmx500mm
 ReversedTrendelenburg/Trendelenburg: 30°
 Lateral Tilt (Left/Right): 18°
 Head rest(up/down): 60° /90°
 Back rest (up/down): 90° /45°
 Foot Board (up/down&outward): 15° /90° 90°
 Longitudinal Sliding: 350mm
 Power: 110~220v/50~60Hz; 1.0kW

DT-12E (new type)Electric hydraulic Operating Table



Standard Accessories

- 1.Pads :1 Set
- 2.Leg support:1 Pair
- 3.Arm support:1Pair
- 4.shoulder support:1 Pair
- 5.Body support:1 Pair
- 6.Anesthetic Screen :1 pc
- 7.Footboard:1Pair

SPECIFICATION

Table height: 670mm~970mm
 Length and width:
 2050mmx480mm
 Reversed Trendelenburg/
 Trendelenburg: 20°/25°
 Lateral Tilt (Left/Right): 20°/20°
 Head rest(up/down):80°/80°
 Back rest (up/down): 75°/20°
 Foot Board (up/down/divide):
 90°/90°/180°(Dismountable)
 Kidney Bridgeup: 120mm
 Power: 220V/50Hz, 1.0Kw
 With battery and Automatic
 charging device


ELECTRIC OPERATING TABLE DT-12F



SPECIFICATION

Table height: 760mm~1060mm
 Length and width:
 2050mmx540mm
 Reversed Trendelenburg/
 Trendelenburg: 25°/30°
 Lateral Tilt (Left/Right): 20°/20°
 Head rest(up/down): 80°/80°
 Back rest (up/down): 75°/20°
 Foot Board (up/down/divide):
 90°/ 90°/ 180° (Dismountable)
 Kidney Bridge up: 120mm
 Longitudinal traverse: 350mm
 Power: 220V/50Hz, 1.0Kw
 With battery and Automatic
 charging device
 With double control system:
 Standby body panel /Remote
 panel

Electric motorized Operating Table DT-12F
 (Longitudinal traverse)

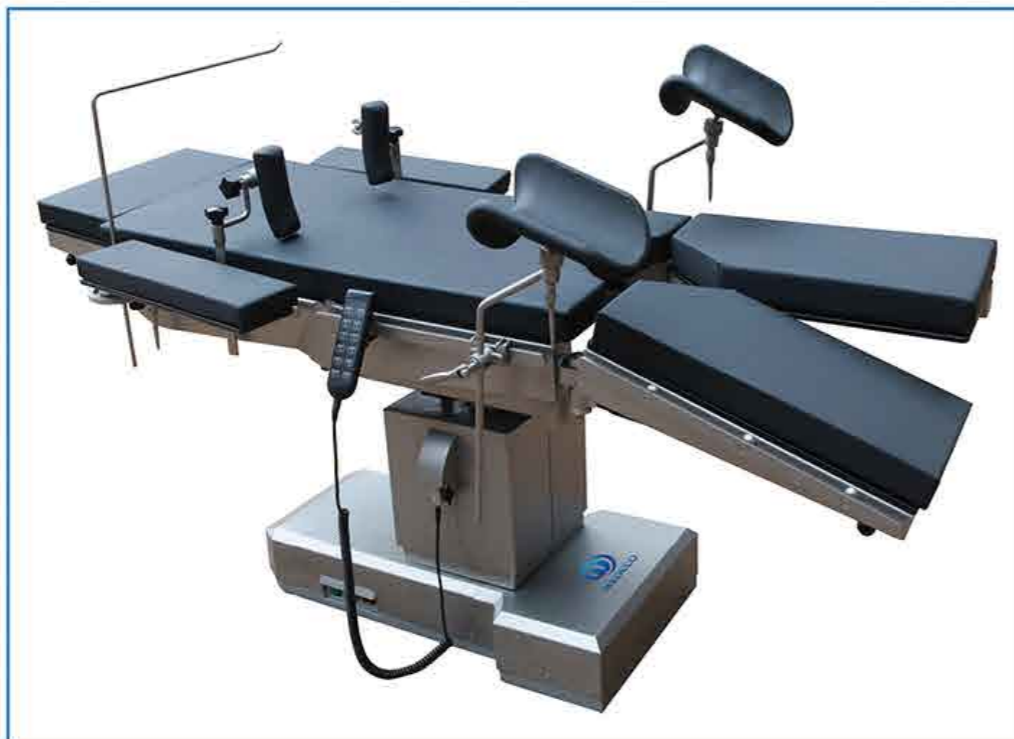

Electric Hydraulic Operating Table DT-12D



SPECIFICATION

Item	Parameters
Size of the bed surface	(2015×540)±10mm
Height between the bed surface and the ground (without mattress)	Min height: (650±20)mm Max height: (1000±20)mm
Lifting extent	(350±20)mm(electric)
Longitudinal traverse extent of the bed surface	(350±20)mm(electric)
Tilt Angle(head/foot)	25°±2°(electric)
Lateral tilt(Left /Right)	22°±2°(electric)
Back board fold Angle	Fold upwards: 70°±2°(electric) Fold down: 32°±2°(electric)
Leg section fold angle	Fold upwards: 28°±2°(Manual) Fold down: 90°±2°(Manual)
Head section fold angle	Fold upwards: 30°±2°(Manual) Fold down: 90°±2°(Manual)
x-rays attenuation coefficient of bed panel (optional)	≤0.76mmAL
Power supply	220V 50Hz 300VA
Net weight	260kg

Standard Accessories

- 1.Pads
- 2.Leg bracket
- 3.Arm rest
- 4.shoulder rest
- 5.Body support
- 6.Anesthetic Screen
- 7.Body restraint strap

Manual Gynecological operating table ME-06A/B

SPECIFICATION

Stainless steel, hydraulic lift
 Table height: 750mm~990mm
 Length and width: 1900mmx600mm

ME-06A
 GYNECOLOGICAL TABLE



Electric Operating Table ECOH005-A



SPECIFICATION:

Dimension of table top*
 Overall Length/Width: 2100mm/500mm
 Table top of from floor
 Height: 750-1000mm
 Reversed Trendelenburg/ Trendelenburg: $\geq 20^\circ$ / $\geq 15^\circ$
 Lateral Tilt: $\geq 15^\circ$
 Backward and Forward Movements: ≥ 400 mm
 Head Section Raised/ lowered from the horizontal: $\geq 45^\circ$ / $\geq 90^\circ$
 Back Section Raised from the horizontal: $\geq 45^\circ$
 Kidney Bridge Elevated: ≥ 80 mm
 Leg Section Lowered from the horizontal: $\geq 90^\circ$
 Leg section opened: $\geq 90^\circ$
 Safe working load: 135kg
 Foot and leg board board into a horizontal or vertical.
 Battery capacity ≥ 2.4 AH

EYE SURGERY OPERATING TABLE ECOG007A(ELECTRIC)



SPECIFICATION:

Table height:500mm~850mm
 Length and width:2000mmx600mm
 Reversed Trendelenburg/Trendelenburg: 15°
 Lateral Tilt (Left/Right): 20°
 Head rest(up/down): 20° / 90°

Electric Operating Table ECOH002-B



SPECIFICATION:

Overall Length/ Width: 2150mm/500mm
 Min Height/Max Height: 580mm-930mm
 Reversed Trendelenburg/ Trendelenburg: $\geq 20^\circ$ / $\geq 15^\circ$
 Lateral Tilt $\geq 15^\circ$
 Backward and Forward Movements: ≥ 250 mm
 Head Section Raised / lowered from the horizontal: $\geq 45^\circ$ / $\geq 90^\circ$
 Shoulder Section Raised/ lowered from the horizontal: $\geq 25^\circ$ / $\geq 20^\circ$
 Back Section Raised/lowered from the horizontal: $\geq 75^\circ$ / $\geq 30^\circ$
 Leg Section Lowered from the horizontal: $\geq 90^\circ$
 Leg section opened: $\geq 90^\circ$
 Horizontal rotation of tabletop: $0 \sim 180^\circ$
 Level reset zero (elected timing): $\pm 2^\circ$
 Lifting speed: $4 \sim 16$ mm/s
 safe working load:135kg

ECOG 007A operating table for eye surgery is one of the eye operating table designed and developed according to the special requirements of operation, can fulfill the needs of eye surgery.

Features:

The super low level design can enable doctor to conduct operation sitting by operating table.
 Adopt electric hydraulic double cylinder elevating with stable performance.
 Import motor and Electromagnetic valve.
 Imported sealing ring and is durable.
 The base seat and upright column covering are made of high quality 304 stainless steel which is anti-corrosive and can be easily cleaned.
 Electric braking control which is easily for moving operating table.

Electric Operating Table ECOH003-C



SPECIFICATION:

Overall Length/ Width: 2050mm/500mm
 Min Height/ Max Height: 580-930mm
 Reversed Trendelenburg/ Trendelenburg: $\geq 20^\circ$ / $\geq 15^\circ$
 Lateral Tilt: $\geq 15^\circ$
 Backward and Forward Movements: ≥ 350 mm
 Adjustment of sections:
 Head Section Raised /lowered from the horizontal: $\geq 45^\circ$ / $\geq 90^\circ$
 Back Section Raised / lowered from the horizontal: $\geq 75^\circ$ / $\geq 30^\circ$
 Leg Section Lowered from the horizontal: $\geq 90^\circ$
 Leg section opened: $\geq 90^\circ$
 Back rise (When optional): ≥ 80 mm
 Horizontal rotation of tabletop: $0 \sim 180^\circ$
 Lifting speed: $4 \sim 16$ mm/s

EYE SURGERY OPERATING TABLE ECOG008B(MANUAL)



Electric Operating Table ECOH006-D



SPECIFICATION:

Overall Length/Width:2100mm/500mm
 Dimension of section:
 Table top of from floor
 Min / Max Height: 750mm/1000mm
 Reversed Trendelenburg/ Trendelenburg: $\geq 20^\circ$ / $\geq 15^\circ$
 Lateral Tilt: $\geq 15^\circ$
 Backward and Forward Movements: ≥ 250 mm
 Head Section Raised/ lowered from the horizontal: $\geq 45^\circ$ / $\geq 90^\circ$
 Back Section Raised/ lowered from the horizontal: $\geq 75^\circ$ / $\geq 30^\circ$
 Leg Section Lowered from the horizontal: $\geq 90^\circ$
 Leg section opened: $\geq 90^\circ$
 Kidney Bridge Elevated: ≥ 80 mm
 Lifting speed: $4 \sim 16$ mm/s
 Safe working load:135kg

ECOG 008B operation table for eye surgery is one of the eye operation table designed and developed according to the special requirements of operation, can fulfill the needs of eye surgery.

Features:

The super low level design can enable doctor to conduct operation sitting by operation table.
 use ?footstep operated ?hydraulic ?elevating.
 Import sealing ring and is durable.
 The base seat made of High intensity ABS is formed in one piece which is anti-corrosive and can be easily cleaned.
 Footstep brake control which is easily for moving operation table. Accessories: A pair of arm supporter and a pair of bladder supporter.

SPECIFICATION

Table height: 690mm~930mm
Length and width:
1960mmx480mm
Reversed Trendelenburg: 25°
Trendelenburg: 20°
Left inclining angle: 18°
Right inclining angle: 18°
Upward folding angle of back rest: 75°
Downward folding angle of back rest: 10°
Upward folding angle of head rest: 45° (Dismountable)
Downward folding angle of head rest: 50°
Downward folding angle of leg rest: 90° (Dismountable)
Kidney bridge range: 80mm

MULTI-PURPOSE GENERAL MECHANICAL OPERATING TABLE JT-2A



Standard Accessories

- 1.Pads
- 2.Leg bracket
- 3.Arm rest
- 4.shoulder rest
- 5.Body support
- 6.Anesthetic Screen
- 7.Body restraint strap



3008AB



MULTI-PURPOSE GENERAL MECHANICAL OPERATING TABLE 3008H



SPECIFICATION

Table height: 650mm~890mm
Length and width:
2000mm x 480mm
Reversed Trendelenburg: 28°
Trendelenburg: 28°
Left inclining angle: 20°
Right inclining angle: 20°
Upward folding angle of back rest: 75°
Downward folding angle of back rest: 10°
Upward folding angle of head rest: 35°
Downward folding angle of head rest: 90°
Downward folding angle of leg rest: 90° (Dismountable) abducted 180°
Kidney bridge range: 100mm

Standard Accessories

- 1.Pads
- 2.Leg bracket
- 3.Arm rest
- 4.shoulder rest
- 5.Body support
- 6.Anesthetic Screen
- 7.Body restraint strap



3002



SPECIFICATION

Table height: 800mm~1045mm
Length and width:
2100mmx480mm
Reversed Trendelenburg: 55°
Trendelenburg: 35°
Left inclining angle: 25°
Right inclining angle: 25°
Upward folding angle of back rest: 85°
Downward folding angle of back rest: 10°
Upward folding angle of head rest: 90° (Dismountable, extendable)
Downward folding angle of head rest: 90°
Downward folding angle of leg rest: 90° (Dismountable)
Option: Kidney bridge range=120mm
Oil pump travel: 240mm

3008 SERIES MECHANICAL OPERATING TABLE(Optional film frame)



DESCRIPTION

∴ **3008 series** comprehensive operating table is necessary for various hospital to operate which is designed for operation on head, neck, abdomen, chest, the four limbs and others in general surgery. Using the current latest oil pump for hydraulic elevation, and the other operations are controlled manually.

∴ **MODEL 3008:** Head-control mechanical operating table (table surface, base and pump shell with painting)

∴ **MODEL 3008A:** Head-control mechanical operating table (base and pump shell with stainless steel)

∴ **MODEL 3008B:** Head-control mechanical operating table (table top, base and pump shell with stainless steel)

∴ **MODEL 3008D:** Head-control mechanical operating table (base and pump shell with stainless steel), two leg plates

Standard Accessories

- 1.Pads
- 2.Leg bracket
- 3.Arm rest
- 4.shoulder rest
- 5.Body support
- 6.Anesthetic Screen
- 7.Body restraint strap

SPECIFICATION

3001 SERIES MECHANICAL OPERATING TABLE(Optional film frame)

Table height: 800mm~1045mm
Length and width:
2100mmx480mm
Reversed Trendelenburg: 35°
Trendelenburg: 20°
Left inclining angle: 22°
Right inclining angle: 22°
Upward folding angle of back rest: 75°
Downward folding angle of back rest: 22°
Upward folding angle of head rest: 90° (Dismountable, extendable)
Downward folding angle of head rest: 90°
Downward folding angle of leg rest: 90° (Dismountable)
Oil pump range: 240mm



DESCRIPTION

∴ 3001 series comprehensive operating table is necessary for various hospital to operate which is designed for operation on head,neck,abdomen,chest, the four limbs and others in general surgery. Using the current latest oil pump for hydraulic elevation, and the other operations are controlled manually.

∴ **Model 3001:** Side-control mechanical operating table (table surface, base and pump shell with painting).

∴ **Model 3001A:** Side-control mechanical operating table (base and pump shell with stainless steel).

∴ **Model 3001B:** Side-control mechanical operating table (table surface, base and pump shell with stainless steel).

Standard Accessories

- 1.Pads
- 2.Leg bracket
- 3.Arm rest
- 4.shoulder rest
- 5.Body support
- 6.Anesthetic Screen
- 7.Body restraint strap

SPECIFICATION

Table height: 740mm~1040mm
Length and width:
1910mmx500mm
Reversed Trendelenburg: 20°
Trendelenburg: 15°
Left inclining angle: 15°
Right inclining angle: 15°
Upward folding angle of back rest: 50°
Downward folding angle of back rest: 15°
Upward folding angle of head rest: 15°
Downward folding angle of head rest: 45°
Downward folding angle of leg rest: 90°
Angle of divided: 180°
Angle regulation range of top table: 360°
Rated load weight: 135KG

3008H NEW TYPE MECHANICAL HYDRAULIC OPERATING TABLE



SPECIFICATION

Table height: 690mm~930mm
Length and width:
1960mmx480mm
Reversed Trendelenburg: 20°
Trendelenburg: 25°
Left inclining angle: 18°
Right inclining angle: 18°
Upward folding angle of back rest: 75°
Downward folding angle of back rest: 10°
Upward folding angle of head rest: 45° (Dismountable)
Downward folding angle of head rest: 50°
Downward folding angle of leg rest: 90° (Dismountable)
Kidney bridge range: 80mm

MULTI-PURPOSE GENERAL ELECTRIC OPERATING TABLE DT-2A



JT-2A NEW TYPE MECHANICAL HYDRAULIC OPERATING TABLE



DESCRIPTION

Comprehensive operating table can be applied to general surgical, obstetrics, urology,ent,minimally invasive surgery, endoscopy, Kidney, neurosurgery,orthopedics backbone and other general purposes.

FEATURES

- 1.Using the current latest oil pump for hydraulic elevation, and the other operations be controlled manually.
- 2.Compact structure and a superior performance, reliable and easy to operate.
- 3.Table surface and pump shell with stainless steel.
- 4.Well sealed mattress in order to ensure comfort to patient and sterilized easy.
- 5.Somatological design, artistic and easy to clean and sterilization.
- 6.The table furnished with a lot of practical standard accessories to satisfy different requirement in operation, detachable clamps of accessory, easy to use.
- 7.With brake under the table, the whole unit is very easy to transport, move or clean.
- 8.Smooth elevation.

3001 NEW TYPE MECHANICAL OPERATING TABLE



SPECIFICATION

Table height: 680mm~880mm
Length and width:
1990mmx480mm
Reversed Trendelenburg: 20°
Trendelenburg: 15°
Left inclining angle: 15°
Right inclining angle: 15°
Upward folding angle of back rest: 42°
Downward folding angle of back rest: 5°
Upward folding angle of head rest: 35° (Dismountable)
Downward folding angle of head rest: 40°
Downward folding angle of leg rest: 90° (Dismountable)
Rated load weight: 135KG

Standard Accessories

- 1.Pads
- 2.Leg bracket
- 3.Arm rest
- 4.shoulder rest
- 5.Body support
- 6.Anesthetic Screen
- 7.Body restraint strap

Standard Accessories

Table height: 720mm~1020mm
Length and width:
1960mmx480mm
Reversed Trendelenburg: 20°
Trendelenburg: 15°
Left inclining angle: 15°
Right inclining angle: 15°
Upward folding angle of back rest: 75°
Upward folding angle of head rest: 75°
Downward folding angle of head rest: 40°
Downward folding angle of leg rest: 90°
Option: Kindney Bridge 80mm



MEDECO-YOUR OWN ONE-STOP
HOSPITAL EQUIPMENT SOLUTION
MANUFACTURER



OPERATING TABLE

MANUAL UNIVERSAL OPERATING TABLE ECOG015-JYC



ECOG015-JYC operation table is suitable for various operations conducted by medical unit.

SPECIFICATION:

Table height:700mm~1050mm
Length and width: 520mmx2050mm
Reversed Trendelenburg/Trendelenburg:
15°
Lateral Tilt (Left/Right): 15°
Head rest(up/down): 30° /90°
Leg board Downwards:90°

ECOG030-2E integrated obstetric bed



MANUAL UNIVERSAL OPERATING TABLE ECOG014-JYD



COG014-JYD operation tables are suitable for various operations conducted by medical unit.

SPECIFICATION:

Table height:700mm~1050mm
Length and width: 2050mmx520mm
Horizontal rotary:360°
Reversed Trendelenburg/Trendelenburg: 15° /20°
Backboard upwards/Downwards:60° /10°
Lateral Tilt (Left/Right): 25°
Head rest(up/down): 30° /90°
Leg board Downwards:90°
Leg of the board split:180°

ECOG031-2F Electric multi-purpose obstetric table



ELECTRIC HYDRAULIC OPERATING TABLE ECOG007DS



SPECIFICATION:

Overall Length/ Width:2100mm/480mm
Max/ Min Height:1000mm/750mm
Reversed Tendelenburg/ Trendelenburg:≥20° /≥15°
Lateral tilt: ≥15°
Head Section Raised/ lowered from the horizontal:≥45° /≥90°
Leg Section Lowered from the horizontal: ≥90°
Leg Section opened: ≥90°
Back Section Raised from the horizontal: ≥45°
Back Section lowered from the horizontal: ≥15°
Kidney Bridge Elevated: ≥100mm
Safe Working Load:135kg
Lifting speed:4~16mm/s

ECOG028-CBII obstetric bed



INTEGRATED OBSTETRIC BED ECOG-034B



SPECIFICATION:

ECOG-034B integrated obstetric bed is suitable for conducting parturient delivery, gynecological surgery, operative abortion, diagnosis and examinations etc.by medical unit.

ECOG025-FS series gynecological table

