

6M SERIES LED FLOODLIGHTS



6M SERIES LED FLOODLIGHT



IK 09

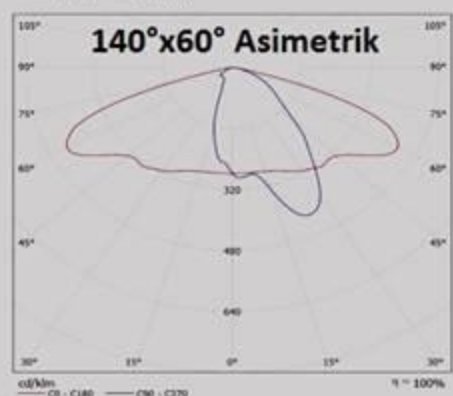
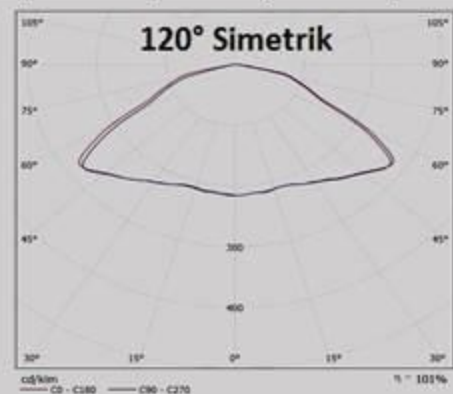
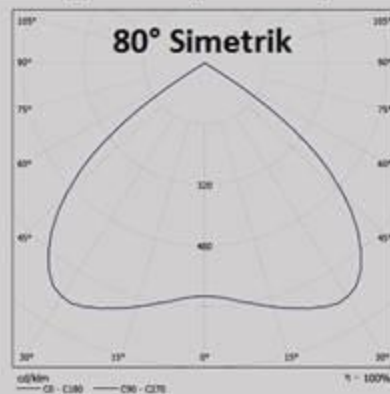


IP66



Voltage / Frequency	100-240 VAC & 50/60Hz							
Power Factor	$\cos\phi \geq 0,95$							
Power (W)	150W	180W	200W	210W	220W	230W	240W	250W
Lumen (lm.)	19500	22500	24600	25400	26350	27350	28050	28750

Light Distribution
Curves
and
FWHM
Light Angles

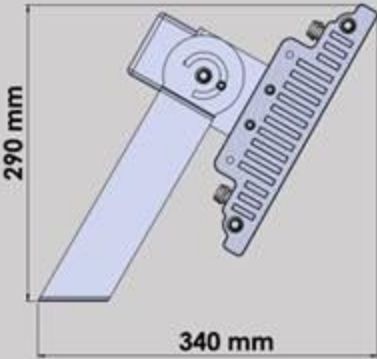
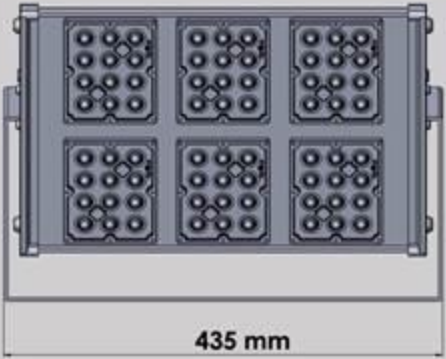

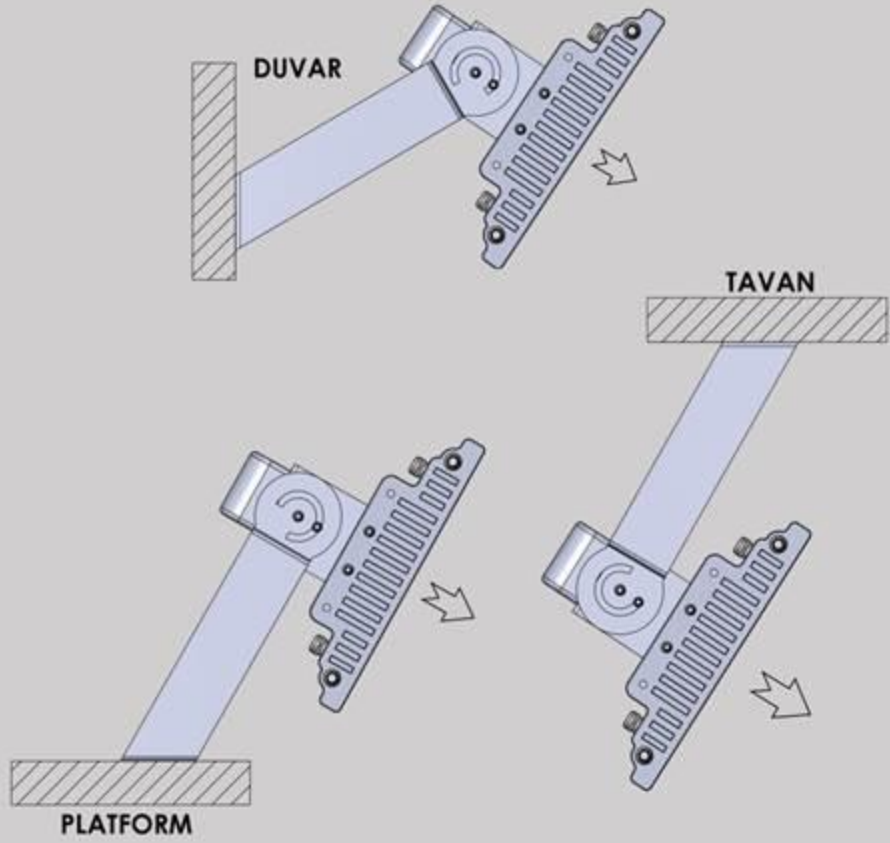


6M SERIES LED FLOODLIGHTS



Optical unit	12° / 80° / 120° / 140°X60° PC Lens Modules
LED	72 pcs.
LED Type	High Power LED
Light Color	CRI ≥ %70, CCT : 3000-6500K
Luminaire Housing and Housing Paint	It consists of aluminum extrusion cooler body, injection molded parts and electrostatic oven painted and sheet metal elements.
Refractory Structure	IP 66 consists of LENS modules. Due to modular structure, other modules from a module failure are not affected and Lighting continuity is provided.
Grounding Continuity	Class I - Grounding Should Be Done !!
Certificate&Standard	TSE 8700 EN 60598-2-5 & 60598-1/ISO/CE
Product Certificate	TSE Certificate of Conformity
Efficiency	110-130 lm/W
Impact Resistance	IK 09
IP Protection	IP 66
Operation Temperature	-30C / +60C
Application	Parking, Garden, Car Park, Area Lighting
Waight	8 kg

6M SERIES LED FLOODLIGHTS

Dimensions	 
Mounting	LED Projector, rotate 360° by turning left and right done. Platform, Ceiling and Wall to be mounted suitable. Light emitting unit in the 0-270° angle range It is suitable to be made.
Angle Adjustment 0-270°	 <p>0-270 DEG ARALIĞINDA PROJEKTOR AÇI AYARI</p>
Platform, Ceiling and Wall Mounting	

APPLICATION



APPLICATION



APPLICATION

