




JULI PACKAGING
60 kilometers from
the Shanghai Exhibition



预涂膜专业生产商

Professional Lamination
Films Manufacturer

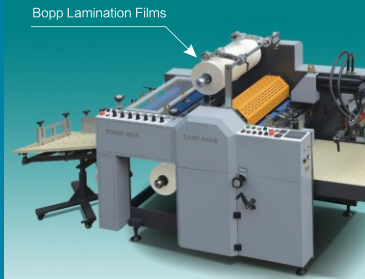

Bopp Lamination Films



Bopp Lamination Films

Made in China

昆山市巨力包装材料科技有限公司

KUNSHAN JULI PACKAGING MATERIAL TECHNOLOGY CO., LTD.

江苏省昆山市周市镇兰泾支路68号 邮编: 215300
电话: +86-512-50137888 50137771 质量投诉: 50137776
传真: +86-512-50137779
手机: 13915777778 (林先生)
邮箱: Juli.package@yahoo.com
网址: <http://www.kshuge.com> <http://www.ksjikj.en.alibaba.com/>

No.68,Lanjing Branch Road,
Zhoushi Town, Kunshan City, Jiangsu Province, China
Tel: +86-512-50137772 50137888
Fax: +86-512-50137779
Mobile: 13915777778 (Mr lin)
E-mail: Juli.package@yahoo.com
<http://www.kshuge.com> <http://www.ksjikj.en.alibaba.com/>

目录封面覆触感膜, 由本公司专业生产提供。
The catalog surface is covered by soft touch film producing by our own company.



昆山市巨力包装材料科技有限公司
KUNSHAN JULI PACKAGING MATERIAL TECHNOLOGY CO., LTD.





■ 关于巨力 / About JULI

昆山市巨力包装材料科技有限公司位于江苏省昆山市兰泾支路68号, 占地面积10000平米, 拥有大型专业化生产车间, 内有员工100-200名, 是一家专业生产环保型BOPP预涂膜、PET预涂膜、触感膜, 抗刮伤哑膜, 镭射和镀铝等多种预涂膜的生产厂家。我公司一直致力于自主研发和吸取国外先进技术相结合的生产模式, 为提高自身生产技术, 我们引进了国内外6条全自动高速预涂膜生产线和多台高速分切机, 多个生产车间, 逐步掌握了强大的预涂工艺、技术及预涂膜产品研发工艺, 并且与国内外多家研究机构及厂商形成了长期战略合作关系, 自主掌握预涂膜复合工艺的专有技术、对生产过程中各项工艺参数的不断改进完善、保持行业领先地位。

管理方面: 公司执行严格的产品质量控制, 经过多年的完善, 形成了一套成熟的体系, 公司高度重视包装产品质量稳定对于印刷行业的重要, 专业推行SPC(Statistical Process Control)质量控制管理系统, 产品质量控制从事后检验改变为事前预防, 保证了产品质量稳定。

证书方面: 2010年成功通过SGS—CSTC 质量检测标准, 获得SGS质量检测证书。

销路方面: 公司国内年畅销量6000-8000多吨, 目前公司产品不仅内销国内市场并且早已出口世界各地, 如欧洲, 美洲, 中东等地区。每年总出货量大于2000吨, 大力满足国内外市场的需求! 深受国内外客户的信赖和好评。

我们的理念: 质量第一、诚实守信、科技创新、打造预涂膜行业第一品牌!

KunShan JULI Packaging Material Co., Ltd is located at No.68 Lanjing Branch Road, Kunshan City, Jiangsu Province, China. Covering an area of 10000 sqm. There are about 100-200 workers here. And we have six professional production workshop specializing Bopp and PET thermal lamination Film, soft touch film, anti-scratch film, metalized and laser thermal lamination film. Keep long cooperation with many research institution and manufactures in China. Holding the core technology and keeping the leading role in this field of China.

Technology Management: Our company take importance of quality control and with years progress we use SPC (Statistical Process Control) and ERP system to control product quality, Keeping quality control in every the process of production to make sure product quality stable.

Certificate: We have passed SGS-CSTC test in 2010 and update the test every year. Our product quality can meet all the requirement of different market.

Hot selling market: Providing about 6000-8000 tons per years for China market and export more than 2000 tons abroad. So our product not only popular in China but also sells good in European, north and south American, middle east and so on. And getting good feedback from customers all over the world.




Our Principle: Quality comes first, Be faithful to customers, Technological development, Create the first brand in this field of China.

■ 公司主要产品及业务

1. BOPP预涂膜 (亮光&哑光)
2. PET预涂膜
3. 触感膜&抗刮伤哑膜
4. 数码超粘膜
5. 镭射预涂膜
6. 镀铝预涂膜

■ Main Products and services

1. Bopp Thermal Lamination Films Gloss & Matt
2. PET Thermal Lamination Films
3. Bopp Soft Touch & Anti-scratch Thermal lamination Films Matt
4. Digital Printing Thermal Lamination Films
5. Laser Thermal Lamination Films
6. Metalized Thermal Lamination Films

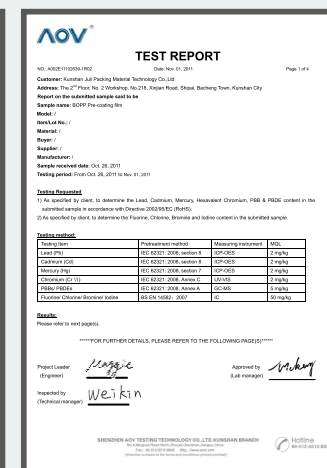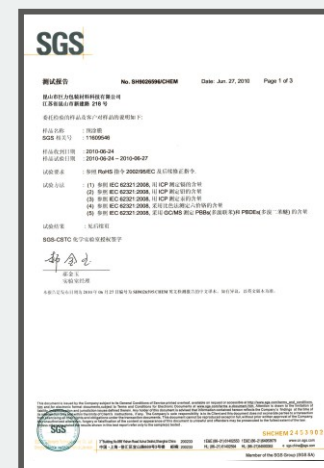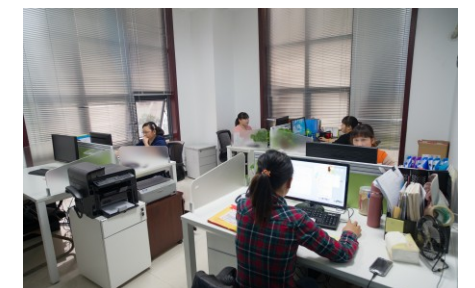

ISO9001: 2008
国际质量管理体系认证
及SGS测试检验报告

Our company was certified with
ISO 9001: 2008
And passed the tests
and authentication of suggest



BOPP 预涂膜 (亮膜&哑膜)
Bopp Thermal Lamination Films Gloss & Matt

- 材质/Material: BOPP+EVA
- 厚度/Thickness: 18 micron (BOPP12+EVA06), 20 micron (BOPP12+EVA08)
25 micron (BOPP12+EVA13), 27 micron (BOPP15+EVA12)
- 长度/Length: 2000~3000m/roll
- 宽度/Width: 200~1820mm
- 纸芯直径/Paper core: 25mm, 76mm, 153mm (1-3inch)
(可根据客户要求 / According to customer requirements)



PET预涂膜 PET Thermal Lamination Film

- 材质/Material: PET+EVA
- 厚度/Thickness: 12 micron (PET06+EVA06), 14 micron (PET08+EVA06)
16 micron (PET08+EVA08), 20 micron (PET12+EVA08)
- 长度/Length: 200~3000m/roll
- 宽度/Width: 200~1820mm
- 纸芯直径/Paper core: 25mm, 76mm, 153mm (1-3inch)
(可根据客户要求 / According to customer requirements)



New

Bopp触感膜&抗刮伤哑膜
Bopp Soft Touch & Anti-scratch Thermal lamination Films Matt

- 材质/Material: BOPP or BOPP + EVA
- 厚度/Thickness: 15micron (without glue), 18micron (without glue)
27micron (BOPP15+EVA12) 32micron (BOPP20+EVA12)
Application: Exceptional velvet feeling, which is widely used for
luxury packaging and high quality graphic media.
- 长宽/Length & Width: 可根据客户要求/According to customer requirements
- 纸芯直径/Paper core: 25mm, 76mm, 153mm (1-3inch)



New

数码超粘膜
Super Bonding Thermal Lamination Films (For digital printing)

- 材质/Material: BOPP + EVA
- 厚度/Thickness: 25micron (BOPP15+EVA10), 27micron (BOPP15+EVA12)
30micron (BOPP20+EVA10), 32micron (BOPP20+EVA12)
- 长宽/Length & Width: 可根据客户要求/According to customer requirements
- 纸芯直径/Paper core: 25mm, 76mm, 153mm (1-3inch)



镭射预涂膜 Laser Thermal Lamination Films

- 材质/Material: BOPP+Laser+EVA
- 厚度/Thickness: 27micron (BOPP15+EVA12), 30micron (BOPP18+EVA12)
- 宽度/Width: 20~1450mm
- 纸芯直径/Paper core: 25mm, 76mm, 153mm (1-3inch)



镀铝预涂膜 Metalized Thermal Lamination Films

- 材质/Material: BOPP or PET + Metalized + EVA
- 厚度/Thickness: 27micron (BOPP15+EVA12), 30micron (BOPP18+EVA12)
- 宽度/Width: 可根据客户要求 /According to customer requirements
- 纸芯直径/Paper core: 25mm, 76mm, 153mm (1-3inch)


■ 规格参数 Specification & Parameter

规格 SPECIFICATION		17亮光/哑光 Gloss/Matt	18亮光/哑光 Gloss/Matt	19亮光/哑光 Gloss/Matt	20亮光/哑光 Gloss/Matt	22亮光/哑光 Gloss/Matt	24亮光/哑光 Gloss/Matt	27亮光/哑光 Gloss/Matt	30亮光/哑光 Gloss/Matt
厚度 Thickness	BASE	12	12	12	12	12	12	15	18
	EVA	05	06	07	08	10	12	12	12
	TOTAL	17	18	19	20	22	24	27	30
亮光定量 Gloss Weigh	m ² /KG	64.5	60.8	57.5	54.6	49.5	45.3	40.3	36.4
哑光定量 Matt Weigh	m ² /KG	67.2	63.1	59.6	53.6	51	46.6	41.6	37.6
宽度Width	360 390 440 540 590 780 880 1080 1320 1400 1600 1820 Upon customer' s requirement (可根据客户要求)								
长度Length	200-6000 more or less 10% allowed								
电晕处理面 Corona Treatment Side	A			B			AB(BOTH SIDE)		
接头数Connector	少于1个 Less than 1								
拉力 Tensile Strength	MD: 2.4*106dyne/cm CD: 5.3*106DYNE/cm								
纸芯直径 Paper Core/inter Dia	25.4mm(1')/76mm(3')/153mm(6') 1 inch, 3 inch								

■ 出口包装 Export Packaging



■ 车间设备 Workshop & Equipment

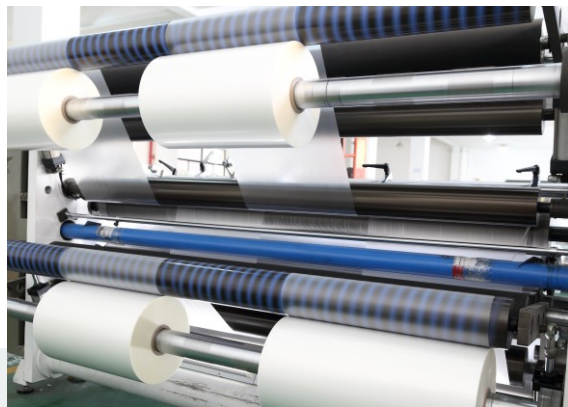

车间一角
Workshop corner

JULI

Technology Package

■ 产品应用 Product Application

印后刷品: 书本、杂志、宣传册、海报

包装业: 专业用于印刷后产品的覆膜, 如: 酒盒、月饼盒、手提袋、医药用品及印后多种产品。

Laminating with printing object including books, magazines, brochures, posters, wine box, moon cake box, shopping bags, medicine package and so on.

