




www.alpoverseas.com




COLOURED EPDM RUBBER PROFILES

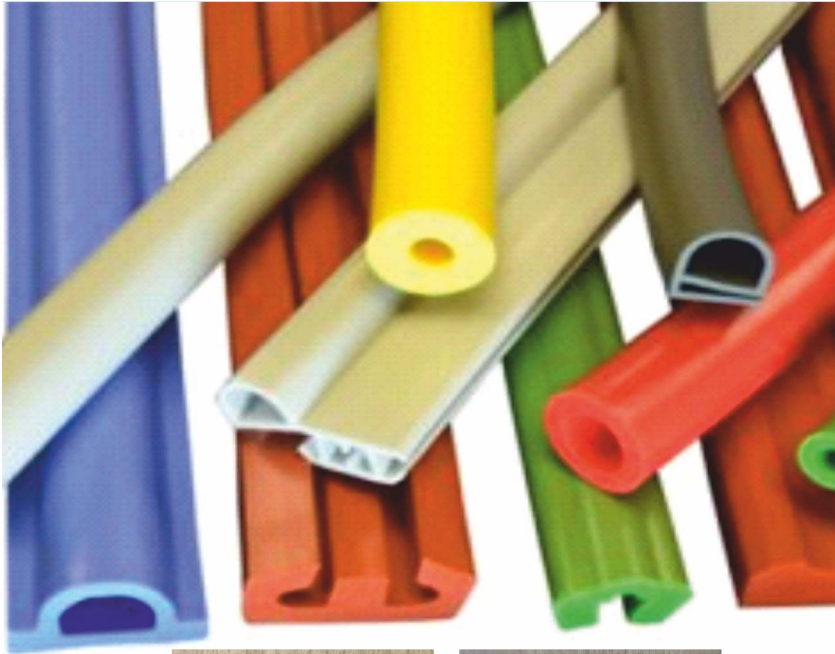

Features:

- Excellent UV stability and resistance to light fastness.
- Excellent resistance to weather & ozone.
- Excellent resistance to water & steam.
- Excellent resistance to Acids, Alkali and Oxygenated solvent.
- Reinforce by silica fillers.

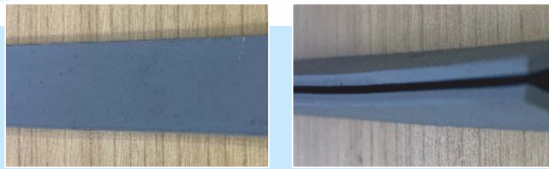

Grey rubber channels for edge protect.

Technical Specifications

Properties	Standard	Specification
Hardness	ASTM D2240	60 A ± 5 (Other feasible)
Tensile Strength	ASTM D412	Min 70 Kg/cm ²
Elongation at Break	ASTM D412	Min 300%
Tear Strength	ASTM D624	Min 15 Kg/cm ²
Compression Set	ASTM D395	Max 50% (70°C/22 hrs)
Ozone Resistance	ASTM D1149	No crack, 100 pphm. 72 hrs
UV Resistance	ASTM G154	GSR ≥ 3.5 & No Crack
Application Temperature		40°C to +130°C



Manufactured and Marketed by:

ALP OVERSEAS PVT. LTD.

Corporate Office: Plot No. 32, Sector-18 HUDA, Gurgaon, Haryana - 122015 (INDIA)

Telephone: +91-124-4731500 | **Website:** www.alpoverseas.com



Rajesh Arora: 9811015051 - (All India), **Lokesh Abrol:** 9815017505 - (North), **Raj Shekhar:** 9845095868 - (South), **Satish Mishra:** 9920662926 - (West), **Manab Dey:** 9903406624 - (East)