



KARVA®

ACRYLEX

KARVA®

sheet

KARVA®

ACRYLEX



KARVA®

PLASTICS & THERMOFORM

KAYSERI INDUSTRIAL ZONE 16th Str. No: 75/B
38070 KAYSERI/TURKEY

T: +90 352 502 0238 F: +90 352 502 0239
export@karva.com.tr info@karva.com.tr



PMMA (Acrylic) sheet is the best known and most widely used thermoplastic, which is characterized by high transparency, resistance to UV light and thermoplastic properties that facilitate its processing.




TECHNICAL DETAILS

PROPERTIES	TEST METHOD	UNIT	VALUE
Light Transmittance	ISO 13468-1	%	92
Density	ISO 1183	g/cm ³	1.19
Flammability UL94	IEC 60695-11-10	Class	HB
Water Absorption	ASTM D570	%	0.3
Mold Shrinkage	ASTM D955	%	0.2-0.6

SHEET SPECIFICATIONS

PROPERTIES	UNIT	Min	Max
Thickness	mm (inch)	1.5 (0.59")	8.0 (0.31")
Width	mm (inch)	600 (23.6")	2150 (84.6")
Length	mm (inch)	600 (23.6")	Any

AVAILABLE COLORS

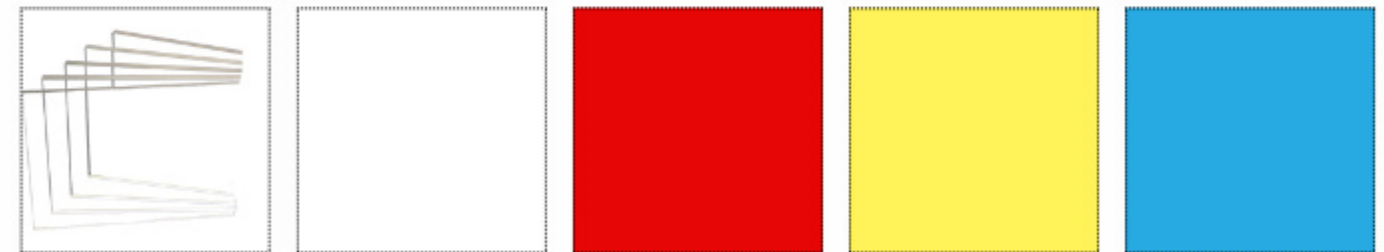

CLEAR

WHITE

RED*

YELLOW*

BLUE*

*R/Y/B REQUIRE MINIMUM ORDER OF QUANTITY




*Karva Acrylex is Registered Trademark of Karva



DISPLAY STAND



CONSTRUCTION/ OUTDOOR

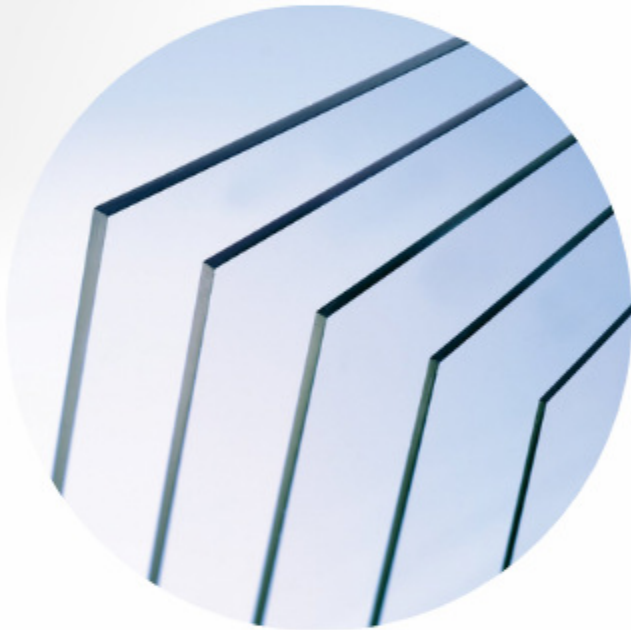

CARAVAN WINDOWS



SIGN BOARD & LETTERS



SEPERATOR



BROCHURE HOLDER

