

Based on China, to the world
立足中国 走向世界

黑白金规划设计承印：0317-3030165 13785499072



石油管材及配件

OCTG & ACCESSORIES

天津隆凯来石油设备有限公司

地址：天津静海经济开发区广海道17号
电话：022-68690381 022-68690382
传真：022-68690381
网址：www.longkailai.com
E-mail：dlpoptg@dlpoptg.com

TIANJIN GRAND VICTORY PETROLEUM EQUIPMENT CO., LTD

Abroad market Contact

Add: No.17 Guanghai Road, Economic Development Area Jinghai District, Tianjin, City
Tel: 0086-(0)22 68690381 0086-(0)22 68690382
Fax: 0086-(0)22 68690381
Web: http://www.gvpetro.com
E-mail: sales@dlpoptg.com

天津隆凯来石油设备有限公司
TIANJIN GRAND VICTORY PETROLEUM EQUIPMENT CO., LTD

企业宗旨 Enterprise Purpose

守信 高效 担当 德广
Honesty, efficiency, responsibility, Virtue Broadness



公司概况
Company Profile 01-04

生产设备
Production Equipment 05-06

荣誉资质
Honor & Certificates 07-08

产品和服务
Product & Service 09-30

营销网络
Sales Network 31-34

Company Profile 隆凯来石油设备公司简介

天津隆凯来石油设备有限公司位于环渤海地区经济中心——天津，毗邻首都北京，紧临天津机场，交通运输便捷，地理条件得天独厚。

注册资金1118万元，自2008年成立至今，从业经验十二年，通过API5CT、ISO9001认证，拥有自营进出口权，以API 5CT石油套管及各类石油配件为主营产品，我们用优质的产品服务着众多国内外知名企业，与大港、大庆、辽河、华北、延长、胜利、新疆等国内各大油田、知名油服公司及南亚、东南亚、中东、欧洲、非洲、南美等海外国家和地区有长期稳固的业务合作关系。

为严格控制产品质量，我们从原料采购到整个生产过程，从过程检验到产品发运及售后服务均制定了相应控制程序，使产品生产全程都在监控之中，并得到广大客户的广泛认可！同时，为了满足客户需求，我们与天津钢管集团（TPCO）、包钢、宝钢、衡钢等国内大型钢厂建立了稳健的合作关系，保证产品质量和充足货源，客户满意，为公司长远发展奠定了坚实基础。

我们奉行守信、高效、担当、德广的经营理念，把追求高精度与高效率，不断提升客户满意度视为我们的核心价值观，以先进的设备和科学的管理为基础，为客户提供最优质的产品；以完善的产销体系和服务团队为基础，确保为客户提供满意的服务。

企业愿景：用诚信与创新，打造国际化石油管道装备企业！

兴隆依靠志气，凯旋来自努力！期待我们共同携手，共创辉煌！

Tianjin Grand Victory Petroleum Equipment Co., Ltd. is located in Tianjin, the economic center of Bohai area, nearby capital Beijing, and close to Tianjin Airport. It has convenient transportation and unique geographical conditions.

Registered capital 11.18 million yuan, Since its establishment in 2008, 12 years of experience, through API 5CT, ISO 9001 certification, with the right to self-import and export, API 5CT oil casing and tubing and various oil accessories as the main products, we use high-quality products to serve many well-known enterprises at home and abroad, and Dagang oil field, Daqing oil field, Liaohe oil field, North China oil field, Yanchang oil field, Shengli oil field, Xinjiang and other major oil fields, well-known oil service company. The company has long-term and stable business cooperation with overseas countries and regions such as South Asia, Southeast Asia, Middle East, Europe, Africa and South America.

In order to strictly control product quality, we have formulated corresponding control procedures from raw material procurement to the whole production process, from process inspection to product delivery and after-sales service, so that the whole process of product production is monitored and widely recognized by our customers. At the same time, in order to meet the needs of customers, we have established a sound cooperative relationship with large domestic steel mills such as Tianjin Pipe (Group) Corporation (TPCO), Baotou Steel, Baosteel, Hengyang steel, etc. to ensure product quality and adequate supply, customer satisfaction, and laid a solid foundation for the company's long-term development.

We adhere to the business philosophy of honesty, efficiency, responsibility, Virtue Broadness, regard the pursuit of high precision and efficiency, and constantly improve customer satisfaction as our core values, provide customers with the best quality products on the basis of advanced equipment and scientific management, and ensure to provide customers with satisfactory services on the basis of a sound production and marketing system and service team.

Enterprise Vision: Build an International Oil Pipeline Equipment Enterprise with Credit and Innovation!

Prosperous depends on ambition, triumph comes from effort! Looking forward to our joint efforts to create brilliance!





[质量目标]

- a) 产品一次性试压合格率99%以上;
- b) 螺纹加工不良率小于1%;
- c) 合同履约率100%;
- d) 客户满意度99%以上。

[企业宗旨]

守信 高效 担当 德广

[企业愿景]

用诚信与创新，打造国际化石油管道装备企业。

Quality objectives:

- A) The one-time pass rate of product is above 99%.
- B) The bad rate of thread processing is less than 1%.
- C) The contract performance rate is 100%;
- D) Customer satisfaction is above 99%.

Enterprise tenet:

Honesty, efficiency, responsibility, Virtue Broadness

Management philosophy:

Build an International Oil Pipeline Equipment Enterprise with Credit and Innovation.

生产设备

Production Equipment



343 管螺纹数控车床
343 pipe-thread numerical control lathe



400 管螺纹数控车床
400 pipe-thread numerical control lathe



液压拧扣机
Pressure Screw Machine



测长称重
Measuring Weighing



锯床
Sawing lathes



喷标机
Jet-superscript




静水试压机
Hydrostatic Teater



自动喷气机
Automatic painting machine


生产流程

Production Flow Chart

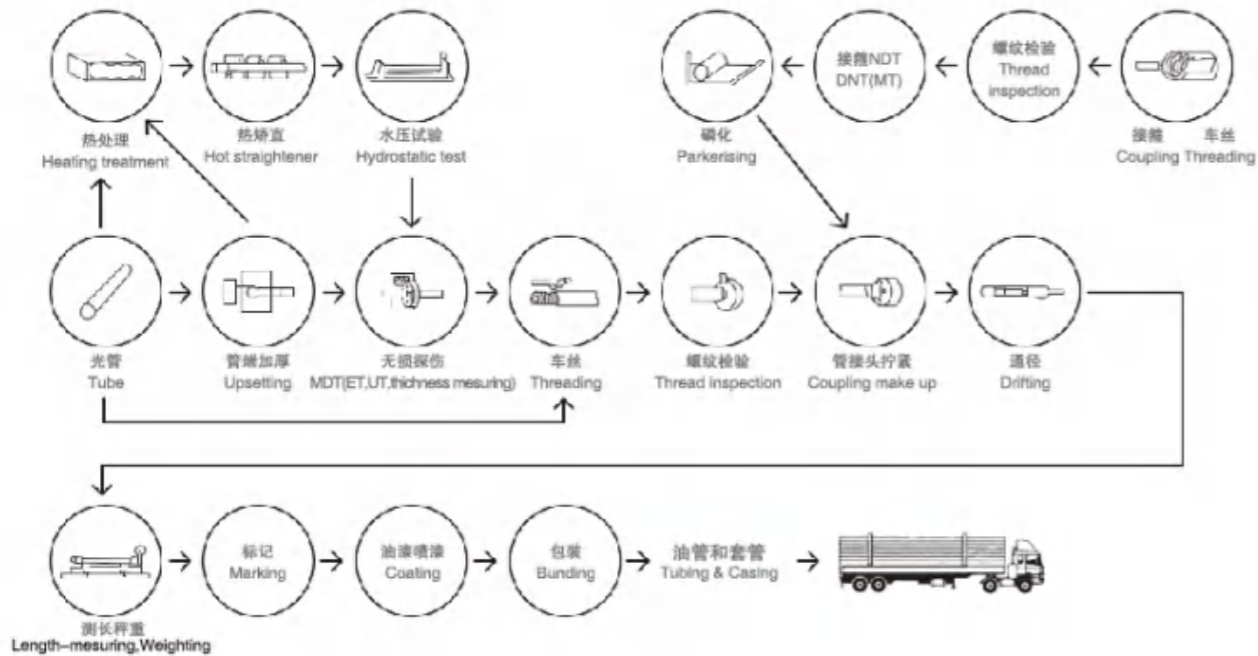

检测设备

Testing Equipments

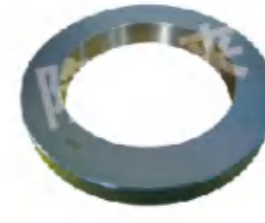

光滑环规
Plain ring gage



外螺纹锥度测量仪
External thread taper tester



拉伸试验机
Tensile testing machine



磁粉探伤机
Magnetic particle detector



螺纹量规
Thread gauge



公扣螺纹锥度检测
Pin Thread Taper Inspection



测量工具
Measuring tools



外螺纹螺距测量仪
external thread screw-pitch tester



水压试验机
Hydraulic tester

序号 Serial Number	名称 Name	规格型号 Specification and Type	使用场所 Applied Location
1	原料检测设备 Raw Material Inspection Device	管体超声波检测 Ultrasonic Detector	生产在线检测 Operation Inspecting and Measuring Line
2	水压试验机 Hydraulic Tester	PPT-80 80Mpa	生产在线静水压试验 Hydrostatic Processing Teat in Line
3	超声波测厚仪 Ultrasonic Pachometer	HCH-2000C	材料检验 Material Inspection
4	磁粉探伤检测 Magnetic Detector	EMW-4000	接箍生产在线检测 Coupling Inspecting in Line
5	覆层测厚仪 Coating Pachometer	TT-260	磷化层检验 Bonderizing Inspection

企业荣誉 Enterprise honor

源于勤奋与坚持
From diligence and persistence



营业执照
Business license



单位资质: ISO
Partner qualification:ISO



单位资质: ISO
Partner qualification:ISO



单位资质: 5CT-2180(2021-2024)
Partner qualification:5CT-2180(2021-2024)

GRAND VICTORY Casing & Tubing 油套管



GRAND VICTORY Casing & Tubing Specification

石油套管 Oil Casing Pipe

- ◆标准: API Spec 5CT /ISO 11960;
 - ◆尺寸: 4-1/2"-20";
 - ◆钢级: J55、K55、N80、L80、C90、T95、P110、V150、13Cr-80/110、28Cr-80/110;
 - ◆扣型: 短圆扣、长圆扣、偏梯扣; 及各类气密扣、特殊扣等高端扣型;
 - ◆长度: R1、R2、R3.
- ◆Standard: API Spec 5CT /ISO 11960;
 - ◆Size: 4-1/2"-20";
 - ◆Steel Grade: J55、K55、N80、L80、C90、T95、P110、V150、13Cr-80/110、28Cr-80/110;
 - ◆Thread Type: STC、LTC、BTC、and all kinds of premium connection and high performance threads etc.;
 - ◆Length: R1、R2、R3.

Outer Diameter		Weight per meter kg/m	# lb/ft	Grade	Thread	Length
in	mm					
4 1/2"	114.3	14.14-22.47	9.50-15.10	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
5"	127	17.11-35.86	11.50-24.10	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
5 1/2"	139.7	20.83-34.23	14.00-23.00	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
6 5/8"	168.28	29.76-35.72	20.00-24.00	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
7"	177.8	25.30-56.55	17.00-38.00	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
7 5/8"	193.68	35.72-63.69	24.00-42.80	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
8 5/8"	219.08	35.72-72.92	24.00-49.00	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
9 5/8"	244.48	48.07-86.91	32.30-58.40	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3
10 3/4"	273.05	48.73-97.77	32.75-65.70	J55/K55/N80/P110	STC/BTC	R1/R2/R3
11 3/4"	298.45	62.50-89.29	42.00-60.00	J55/K55/N80/P110	STC/BTC	R1/R2/R3
13 3/8"	339.72	71.43-107.15	48.00-72.00	J55/K55/N80/P110	STC/BTC	R1/R2/R3
16"	406.40	96.73-162.21	65.00-109.00	J55/K55/N80/P110	STC/BTC	R1/R2/R3
18-5/8"	473.08	130.21	87.50	J55/K55/N80/P110	STC/BTC	R1/R2/R3
20"	508	139.89-197.93	94.00-133.00	J55/K55/N80/P110	LTC/STC/BTC	R1/R2/R3

注: 外径508mm-1018mm, 加工丝扣的套管长度可达12米, 丝扣可按用户要求加工。

Note: With outer diameter is from 508mm to 1018mm, the length of casing processing thread can reach up to 12 meters, and thread can be processed according to customers' requirements.

油管 Tubing


- ◆标准: API Spec 5CT /ISO 11960;
 - ◆尺寸: 1.315"-4-1/2";
 - ◆钢级: J55、K55、N80、L80、C90、T95、P110、V150、13Cr-80/110、28Cr-80/110;
 - ◆扣型: EUE 8牙、NUE 10牙; 及各类气密扣、特殊扣等高端扣型;
 - ◆长度: R1、R2、R3.
- ◆Standard: API Spec 5CT /ISO 11960;
 - ◆Size: 1.315"-4-1/2";
 - ◆Steel Grade: J55、K55、N80、L80、C90、T95、P110、V150、13Cr-80/110、28Cr-80/110;
 - ◆Thread Type: EUE 8rd、NUE 10rd; and all kinds of premium connection and high performance threads etc.;
 - ◆Length: R1、R2、R3.

O.D.	Nominal mass		O.D.		W.T.		Nominal weight(kg/m)	
	Threaded and coupled		In.	mm	In.	mm	Threaded and coupled	
	NUE	EUE					NUE	EUE
2 3/8"	4.00	-	2.375	60.32	0.169	4.24	5.95	-
	4.60	4.70	2.375	60.32	0.190	4.83	6.85	6.99
	5.80	5.95	2.375	60.32	0.254	6.45	8.63	8.85
	6.60	-	2.375	60.32	0.295	7.49	9.82	-
	7.35	7.45	2.375	60.32	0.336	8.53	10.94	11.09
2 7/8"	6.40	6.50	2.875	73.02	0.217	5.51	9.52	9.67
	7.80	7.90	2.875	73.02	0.276	7.01	11.61	11.76
	8.60	8.70	2.875	73.02	0.308	7.82	12.80	12.95
	9.35	9.45	2.875	73.02	0.340	8.64	13.91	14.06
	10.50	-	2.875	73.02	0.392	9.96	15.63	-
3 1/2"	11.50	-	2.875	73.02	0.440	11.18	17.11	-
	7.70	-	3.500	88.90	0.216	5.49	11.46	-
	9.20	9.30	3.500	88.90	0.254	6.45	13.69	13.84
	10.20	-	3.500	88.90	0.289	7.34	15.18	-
	12.70	12.95	3.500	88.90	0.375	9.52	18.90	19.27
4"	14.30	-	3.500	88.90	0.430	10.92	21.28	-
	15.50	-	3.500	88.90	0.476	12.09	23.07	-
	17.00	-	3.500	88.90	0.530	13.46	25.30	-
	9.50	-	4.000	101.60	0.226	5.74	14.14	-
	10.70	11.00	4.000	101.60	0.262	6.65	-	16.37
4 1/2"	13.20	-	4.000	101.60	0.330	8.38	19.64	-
	16.10	-	4.000	101.60	0.415	10.54	23.96	-
	18.90	-	4.000	101.60	0.500	12.70	28.13	-
	22.20	-	4.000	101.60	0.610	15.49	33.04	-
	12.60	12.75	4.500	114.30	0.271	6.88	18.75	18.97
4 1/2"	15.20	-	4.500	114.30	0.337	8.56	22.62	-
	17.00	-	4.500	114.30	0.380	9.65	25.30	-
	18.90	-	4.500	114.30	0.430	10.92	28.13	-
	21.50	-	4.500	114.30	0.500	12.70	32.00	-
	23.70	-	4.500	114.30	0.560	14.22	35.27	-
	26.10	-	4.500	114.30	0.630	16.00	38.84	-

GRAND VICTORY CRA Tubular Series

对于许多暴露在油气生产环境中的部件来说，提供长期的抗腐蚀性是必不可少的。组件包括井下油管和
安全关键元件、井口和采油树组件和阀门、管道、阀门、容器、热交换器和设施中的许多其他设备。根据他
们所本身具有特耐腐蚀性特征来选择不同的CRA管，比如1CR、3CR、9CR、13CR、Super-13Cr 等。

It is essential for providing long term resistance to corrosion for many components exposed to oil and
gas production environments. Components include downhole tub-ing and safety critical elements, wellhead
and Xmas tree components and valves, pipelines, piping, valves, vessels, heat exchangers and many other
pieces of equipment in facilities. There are many CRAs to select from, and they can be characterised by
their resistance to specific environments such as 1CR、3CR、9CR、13CR,Super-13Cr etc.

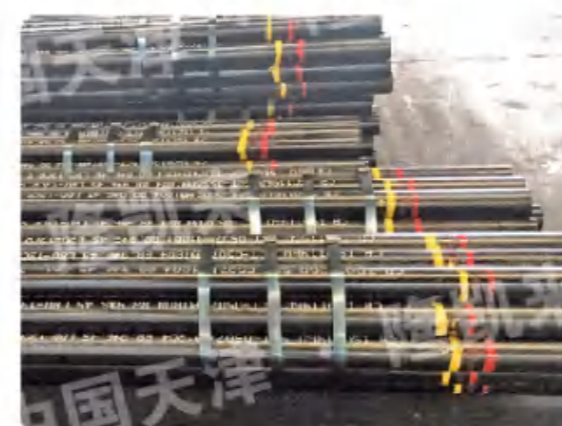

GRAND VICTORY Pup Joint 短接

- ◆尺寸: 1.315"-20";
 - ◆钢级: J55、K55、N80、L80、P110、Q125、L80-13Cr等;
 - ◆扣型: NUE、EUE、SC、LTC、BTC及各类气密扣、特殊扣等高端扣型;
 - ◆长度: 2、4、6、8、10—20FT等; 也可根据客户要求按图纸加工。
-
- ◆Size: 1.315"-20";
 - ◆Grade: J55、K55、N80、L80、P110、Q125、L80-13Cr etc.
 - ◆Connection: NUE、EUE、SC、LTC、BTC and all kinds of premium connection and high performance thread etc.
 - ◆Length: 2、4、6、8、10—20FT etc. It can also be processed according to customer requirements.



GRAND VICTORY Coupling 接箍

- ◆尺寸: 1.315"-20";
 - ◆扣型: NUE、EUE、SC、LTC、BTC、特殊间隙及各类气密扣、特殊扣等高端扣型;
 - ◆钢级: J55、K55、N80、L80、D10、P110、80S、110S、Q125、L80-3Cr/13Cr等;
 - ◆表面处理: 磷化、发黑、渗锌、渗氮、喷砂、镀铜等工艺;
 - ◆包装: 托盘、纸箱、木箱。
-
- ◆Size: 1.315"-20";
 - ◆Connection: NUE、EUE、SC、LTC、BTC、and all kinds of premium connection and high performance thread etc
 - ◆Grade: J55、K55、N80、L80、D10、P110、80S、110S、Q125、L80-3Cr/13Cr etc
 - ◆Surface: Phosphating、Blackening、Zincating、Nitriding、Sandblasting、Copper plating and so on
 - ◆Packing: Wooden Pallets、Carton Cases、Wooden Cases.



GRAND VICTORY Crossover 转换接头

转换接头是用于连接或改变从一个尺寸、重量或螺纹连接类型到相同或另一个尺寸、重量或螺纹连接类型的单件管状截面。具体规格根据客户图纸要求或来料加工。

A crossover is a one piece tubular section used for the purpose of joining or changing from one size、weight、or type of thread connection to the same or another size、weight、or type of thread connection. The specific specifications according to customer drawings or incoming raw material.



GRAND VICTORY Premium Connection Series 特殊扣

为满足油田环境和特殊井况对高抗腐蚀产品的要求，隆凯来公司开发了一系列综合性能优良的产品。具体规格根据客户图纸要求或来料加工。


GRAND VICTORY develops a comprehensive range of high performance products to meet the requirements of high resistant corrosion products in oil field environments and specific well conditions. The specific specifications according to customer drawings or incoming raw material.



Connection: TJ-1

Features

- Metal-to-Metal Seal
- Reverse Angel Torque Shoulder
- Improved Buttress Thread

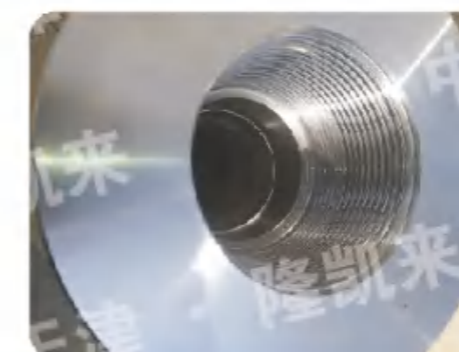

Connection: TJ-2

Features

- Optimized Metal-to-Metal Seal
- Reverse Angle Torque Shoulder
- Hook thread profile



Connection: TJ-3

Features

- External Torque Shoulder
- Multiple Seal System
- Interference Tapered Thread

GRAND VICTORY Premium Connection Series 特殊扣



Connection: TJ-4

Features

- Excellent galling resistance
- 100% metal seal created at the torque shoulder.
- Straightforward make-up



Connection: TJ-5

Features

- Excellent galling resistance
- 100% metal seal created at the torque shoulder.
- Straightforward make-up




Connection: TJ-6

Features:

- Excellent galling resistance
- Metal-to-Metal Seal

GRAND VICTORY Premium Connection Series 特殊扣

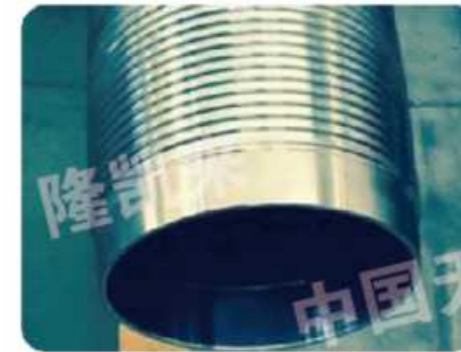

Connection: TJ-7

Features

- Increased compression resistance
- Metal to Metal seal
- Dope relief groove



Connection: TJ-8

Features:

- Excellent Anti-galling characteristics
- Multiple Metal to Metal seal
- High torque




Connection: TJ-9

Features:

- Excellent resistance to bending
- Excellent Anti-galling characteristics
- Suitable for high alloy & carbon steel pipes

GRAND VICTORY Premium Connection Series 特殊扣

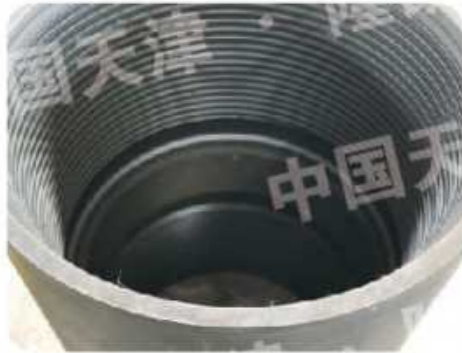

Connection: TJ-10

Features:


- Excellent gas seal-ability
- Easy stabbing
- Excellent Anti-galling characteristics



Connection: TJ-11

Features:

- Zigzag thread structure
- High productivity
- Good performance

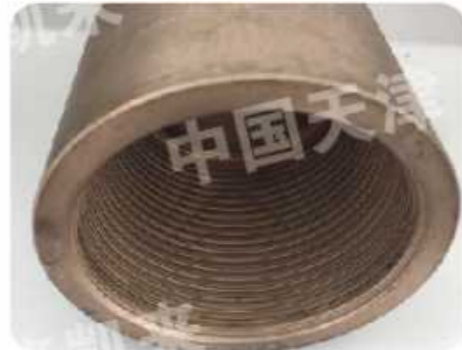

Connection: TJ-12

Features:

- Threaded connection with coupling;
- Metal to metal seal
- Internal flush structure

GRAND VICTORY Premium Connection Series 特殊扣



Connection: TJ-13

Features:


- Excellent gas- sealing performance
- Higher tensile and compressive strength
- Better anti-galling performance



Connection: TJ-14

Features:

- Gas tight proprietary thread connection
- Metal to metal seal
- Improved buttress thread design



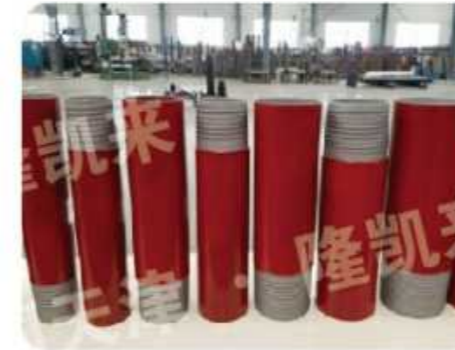


Connection: TJ-15

Features:

- Compression rating
- High clearance & torque capability
- Superior tension strength.

GRAND VICTORY Perforated Pipe & Slotted Liner 割缝管&打孔管

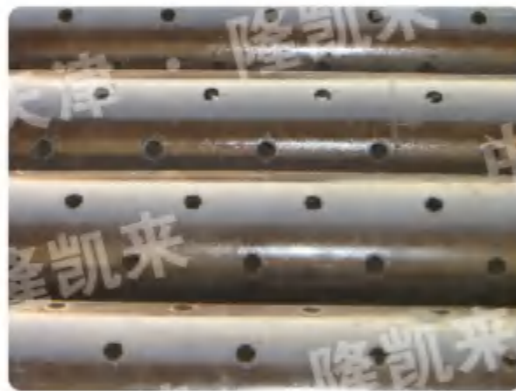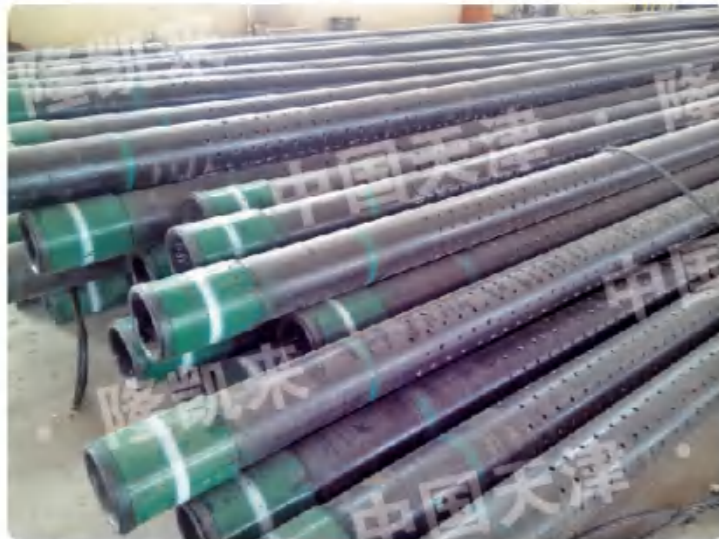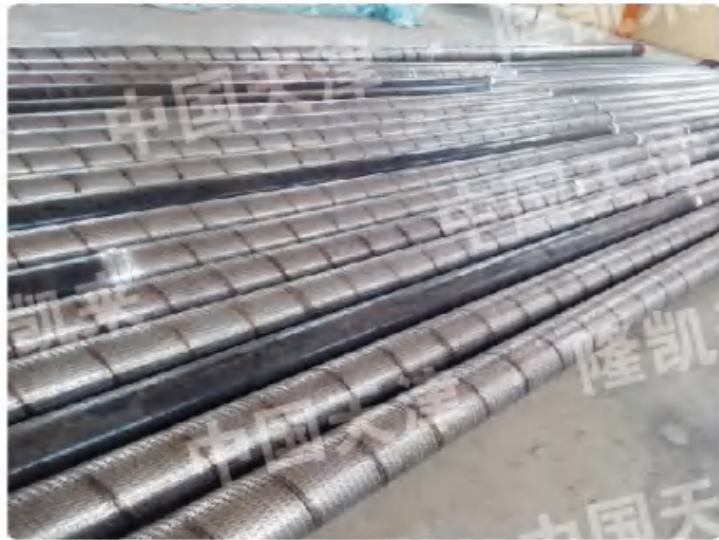



我们根据客户的要求进行加工生产。

We can manufacture and process pipe according to customers' requirements.


GRAND VICTORY Alloy Tube & Flange 合金管&法兰

◆材质: Material: SA213-T91、A335-P91、15CrMo、30CrMo、35CrMo、42CrMo、P5(Cr5Mo)、
P9(Cr9Mo)、A335-P11、A335-P22、12Cr1Mov、10CrMo910、etc.

◆规格 Size: OD(10-762mm)*Thickness(2-60mm)

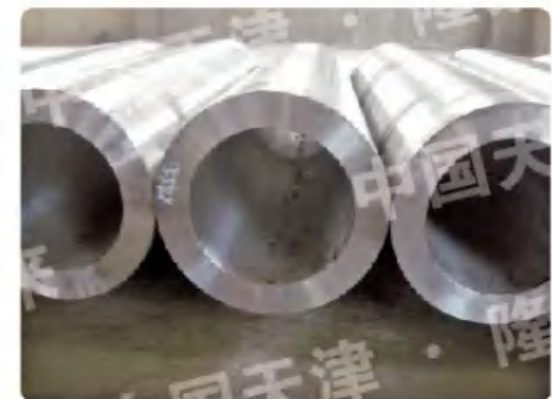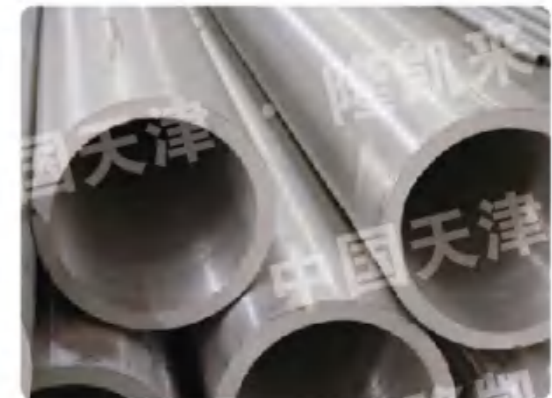

GRAND VICTORY Fittings&Valves 管件 & 阀门

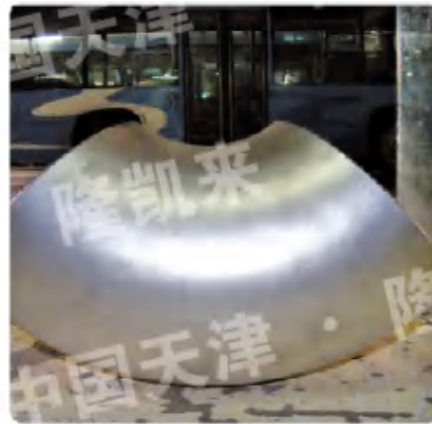

我公司经营的管道元件产品品种齐全、规格多样、质量可靠、外形美观、性能稳定、是值得您信赖的选择。

The pipe fittings of our company variety complete、with specifications and diverse、reliable quality and beautiful appearance、stable function、are worthy of your trust in the selection.



缩颈管
Swaged Nipple



偏心大小头
Eccentric Reducer



六角活接头
Union Hex



堵头
Plug



短节
Nipple Straight



三通
Tee



补芯
Bushing






大小头
Reducer



螺栓
Bolt Stud

GRAND VICTORY Line Pipe 管线管

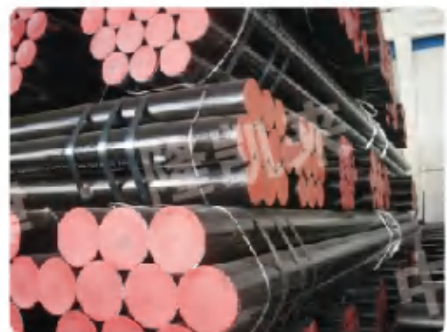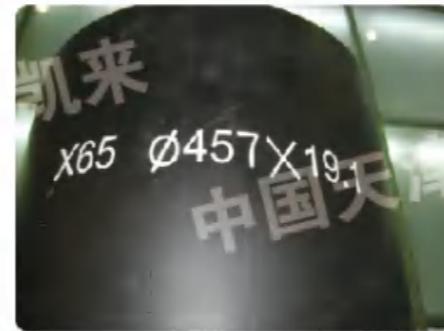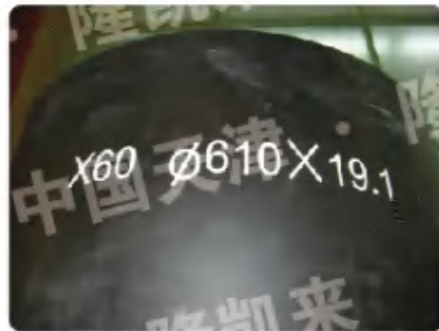

- ◆标准 Standard: API SPEC 5L——美国石油学会标准 GB/T9711——中国国家标准
- ◆用途 Usage: 用于石油、天然气工业中的氧、水、油输送管
- ◆主要生产钢管牌号 Steel Grade: B、X42、X52、X60、X65、X70 L245 L290 L320 L360 L390 L450 L485...
- ◆规格 Size: 2" -64" (60.3mm-1620mm)

尺寸公差: Dimensional tolerance

管体尺寸的允许偏差		壁厚的允许偏差		
尺寸规格	允许偏差 (相对于规定外径)	尺寸规格	钢管种类	允许偏差 (规定壁厚的百分数) ^a
< 2"	+0.016 in. -0.031 in. (+0.41 mm, -0.79 mm)	≤ 2"	各种	B级或低于B级的钢管: +20.0-12.5 X42级或高于X42级的钢管: +15.0-12.5
≥ 2"-4 1/2", 连续焊接	± 1.00%	> 2"-< 20"	各种	+15.0-12.5
≥ 2"-< 20"	± 0.75%	≥ 20"	焊接钢管	+17.5-12.5
≥ 20", 无缝管	± 1.00%	≥ 20"	无缝钢管	+15.0-12.5
≥ 20"-≤ 36", 焊管	+0.75% -0.25%			+19.5-8.0
> 36", 焊管	+ 1/4 in. -1/8 in. (+ 6.35 mm -3.20 mm)			+17.5-10.0

a 在静水压试验压力超过标准试验压力时, 尺寸允许偏差可由供需双方协商。
a 在需方要求壁厚负偏差小于表中下列数值时, 相对总的允许偏差范围百分率的正偏差应对负偏差的减少做相应增加。

力学性能: Mechanical property

标准	牌号	抗拉强度 (MPa)	屈服强度 (MPa)	屈强比	伸长率 (%)	0°C冲击功 Akv (J)	热处理状态
API SPEC 5L GB/T9711.2	B	≥415	245 - 440	≤0.80	22	≥40	正火
X42	≥415	290 - 440	≤0.80	21	≥40		正火
X52	≥460	360 - 510	≤0.85	20	≥40		正火
X60	≥520	415 - 565	≤0.85	18	≥40		正火
X65	≥535	450 - 570	≤0.90	18	≥40		淬火+回火
X70	≥570	485 - 605	≤0.90	18	≥40		淬火+回火

化学成分: Chemical composition

标准	牌号	化学成分 (%) CEV (%)							
		C	Si	Mn	P	S	V	Nb	Ti
API SPEC 5L GB/T9711.2	B	≤0.16	≤0.40	≤1.10	≤0.020	≤0.010	-	-	- ≤0.42
X42	≤0.17	≤0.40	≤1.20	≤0.020	≤0.010	≤0.05	≤0.05	≤0.04	≤0.42
X52	≤0.20	≤0.45	≤1.60	≤0.020	≤0.010	≤0.10	≤0.05	≤0.04	≤0.45
X60	≤0.21	≤0.45	≤1.60	≤0.020	≤0.010	≤0.15	≤0.05	≤0.04	协议
X65	≤0.16	≤0.45	≤1.60	≤0.020	≤0.010	≤0.06	≤0.05	≤0.06	≤0.45
X70	≤0.16	≤0.45	≤1.70	≤0.020	≤0.010	≤0.06	≤0.05	≤0.06	≤0.45

- 注: 1. 0.015% ≤ Altot < 0.06%; N ≤ 0.012%; Al/N ≥ 2/1; Cu ≤ 0.25%; Ni ≤ 0.30%; Cr ≤ 0.30%; Mo ≤ 0.10%
2. V+ Nb+ Ti ≤ 0.15
3. X60、X65、X70经协商 Mo ≤ 0.35%

GRAND VICTORY Workshop 车间



On the basis of API5CT&5B and Q1 standard,our facility will implement modern-ized management into all departments and all aspects.

工程案例

The engineering case



大庆油田
DAQING OILFIELD



桥梁工程
BRIDGE PROJECT



风电工程
WIND POWER PROJECT



塔里木油田
TARIM OILFIELD



辽河油田管道
LIAOHE OILFIELD PIPE



油田钻井
OILFIELD DRILLING

展会 交流合作

Exhibition exchanges and cooperation



我们的团队

Our team



心在一起
才是团队

人在一起不是一个团队，
心在一起才是一个完美的团队
People are not a team together.
Heart together is a perfect team

GRAND VICTORY Sales Network

网络营销图



国内市场：国内各大油田及油田服务公司

国外市场：中东、欧洲、非洲、南美、亚洲等地区，如阿联酋、哈萨克斯坦、新加坡等。

Domestic Market: all major domestic oil fields, and the oilfield-services firms.

Overseas Market: Middle East, Europe, Africa, South America, Asia and other regions, such as UAE, KZ, Singapore, and so on.

远景规划

Long-term Vision

在国内外广大客户及业内朋友的合作与支持下，我公司自创立以来一直以稳健的步伐迈向国际市场。

我公司在目前的发展基础上，不断注入新生力量，产品经营范围越来越广。在我公司的人性化科学管理和强势的企业文化基础上，我公司保持着良好的口碑和诚信度，在发展目标中不断有新的突破。在复杂多变的市场环境中，我公司努力提升自身产品质量和服务水平，做到了稳中求胜。欢迎越来越多的商业人士与我公司合作，求共存，求发展。

In Cooperation and support of customers and friends at home and abroad, our company keep a steady pace to the international market since its inception.

On the bases of present development, our company continue into the new force, and further expand the scope of operation. On the bases of humane scientific management and powerful enterprise culture, our company has always maintained a good reputation and integrity and acquire new breakthrough continually in the development goals. In the complicated and unstable market environment, we make efforts for promoting product quality and service level, to be steady riding out. Welcome more and more business people cooperate with our company for co-exist and development.

GRAND VICTORY Company Culture

企业文化

我们的核心价值观 Our Core Values

追求高精度与高效率，不断提升客户满意度。
Pursue high precision and efficiency, and constantly improve customer satisfaction.

我们的使命 Our Mission

成为超一流的石油装备供应商。
Become a first-class supplier of petroleum equipment.

我们的愿景 Our Vision

用诚信与创新，打造国际化石油管道装备企业。
Build an International Oil Pipeline Equipment Enterprise with Credit and Innovation.

我们的口号 Our slogan

兴隆依靠志气，凯旋来自努力。
Prosperity depends on ambition, triumph comes from effort.

我们的企业精神 Our Enterprise Spirit

1. 自信、激情、尽善尽美。
Confidence, passion and perfection.
2. 成就客户，成全自我。
Achieving Customers and Self-improvement.
3. 坚持多做一点点，我们的人生大不同。
Sticking to do more makes a big difference in our lives.
4. 精益求精，是企业第一生产力。
Keeping improving is the first productive force of an enterprise.
5. 迎接变化，勇于担当，热爱工作，顾全大局。
Welcome the change, be brave to take on the responsibility, love the work and take the overall situation into consideration.
6. 上班时间只做与工作有关的事情。
Do only work-related tasks during office hours.
7. 今天的事不推到明天，自己的事不推卸给别人。
Don't put off today's business till tomorrow, and don't pass on your own business to others.
8. 培训与学习，是最好的福利。
Training and learning are the best benefits.

我们的经营理念 Our business philosophy

守信 高效 担当 德广
Honesty, efficiency, responsibility, Virtue Broadness

