

SMART LED POWER SUPPLY  
PROFESSIONAL MANUFACTURER  
SOLUTION PROVIDER

OURUNN



**CATALOGUE**

产品画册



珠海欧瑞电源科技有限公司  
Zhuhai Ourunn Power Technology Co., Ltd



## 定制 LED 电源

珠海欧瑞电源科技有限公司成立于2014年，坐落于风光旖旎的海滨城市——珠海。公司集研发、生产、销售于一体，专注于卫浴智能驱动电源与智控开关，以及商用与户外防水驱动电源、调光电源等产品的设计与制造。我们的产品已通过中国、欧洲、美国、英国、澳大利亚等多个国家和地区的权威认证，畅销全球市场。

我们始终坚持以务实为基石，以技术驱动创新为引擎，在技术浪潮中站稳脚跟、在多变市场中赢得信赖；以客户为中心，致力于打造更智能、更高效、更安全的电源解决方案，与全球合作伙伴携手共进，共创价值！！

## Bespoke LED Power Supply

Established in 2014, Zhuhai OURUNN Power Supply Technology Co., Ltd. is located in the beautiful coastal city - Zhuhai. Our company integrates R&D, production and sales, and specializes in the design and manufacture of intelligent drive power supply and smart switch for bathroom, as well as commercial and outdoor waterproof drive power supply and dimmable power supply. Our products have passed the authoritative certification of China, Europe, the United States, the United Kingdom, Australia and other countries and regions, and sell well in the global market.

We always insist on pragmatism as the cornerstone and technology-driven innovation as the engine to stand firm in the technological wave and win the trust in the changing market; customer-oriented, we are committed to creating smarter, more efficient and safer power supply solutions, and work hand in hand with our global partners to create value together!



# 目录 TABLE OF CONTENTS

## ● 室内和浴室照明变压器/Indoor&Bathroom Lighting Transformer



CCC认证12W-120W  
Page 1-4



UL认证18W-150W  
Page 5-7



防水铝壳 12W-120W  
Page 8




超薄防水铝壳24W-72W  
Page 9-10



经济款防水24W-72W  
Page 11-13



超薄塑胶壳12W-36W  
Page 14



感应开关  
Page 15



2合1电源  
Page 16

## CCC双级PFC电源

Built-In Active PFC Function 18W-120W

- 输入: 220-240VAC
  - IP44 防水等级
  - 3年质保
  - 无频闪
  - 双级PFC
  - 欠压/过压/过载/短路保护
- 
- Input: 220-240VAC
  - IP44 rating
  - 3 years warranty
  - Flicker-free light
  - Built-in active PFC function
  - Undervoltage/overvoltage/overload/short circuit protection




尺寸/Size: 152\*50\*16mm



尺寸/Size: 210\*70\*19mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VCS-12018P01	220-240VAC	12V, 18W	Yes	≥0.80	152*50*16	IP44
VCS-12024P01	220-240VAC	12V, 24W	Yes	≥0.80	152*50*16	IP44
VCS-12036P01	220-240VAC	12V, 36W	No	≥0.95	152*50*16	IP44
VCS-12045P02	220-240VAC	12V, 45W	No	≥0.95	187*50*16.8	IP44
VCS-12060P02	220-240VAC	12V, 60W	No	≥0.95	187*50*16.8	IP44
VCS-12072P03	220-240VAC	12V, 72W	Yes	≥0.95	210*70*19	IP44
VCS-12090P03	220-240VAC	12V, 90W	Yes	≥0.95	210*70*19	IP44
VCS-12100P03	220-240VAC	12V, 100W	Yes	≥0.95	210*70*19	IP44
VCS-12120P03	220-240VAC	12V, 120W	Yes	≥0.95	210*70*19	IP44

适用于/Fit for



## CCC单级PFC电源


Passive PFC Function 25W-60W

- 输入电压： 220-240VAC
- IP44 防水等级
- 3年质保
- 单级PFC
- 欠压/过压/过载/短路保护



尺寸/Size: 152\*50\*16mm



- Input: 220-240VAC
- IP44 rating
- 3 years warranty
- Passive PFC function
- Undervoltage/overvoltage/overload/short circuit protection

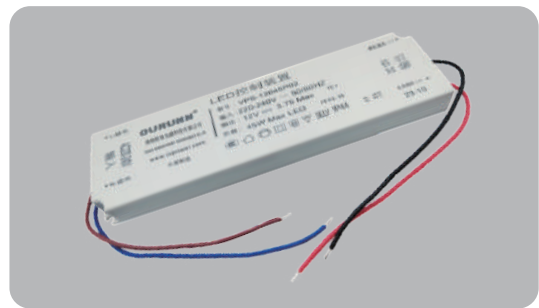

尺寸/Size: 187\*50\*16.8mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VPS-12025P01	220-240VAC	12V, 25W	Yes	≥0.95	152*50*16	IP44
VPS-12036P01	220-240VAC	12V, 36W	Yes	≥0.95	152*50*16	IP44
VPS-12045P02	220-240VAC	12V, 45W	Yes	≥0.95	187*50*16.8	IP44
VPS-12060P02	220-240VAC	12V, 60W	Yes	≥0.95	187*50*16.8	IP44

适用于/Fit for



## CCC经济款电源

Cost-effective Power Supply 18W-36W

- 输入电压: 220-240VAC
  - IP20/IP44 防水等级
  - 2年质保
  - 单级PFC
  - 欠压/过压/过载/短路保护
- 
- Input: 220-240VAC
  - IP20/IP44 design for indoor
  - 2 years warranty
  - Passive PFC function
  - Undervoltage/overvoltage/overload/short circuit protection





尺寸/Size: 127\*50\*12.8mm



尺寸/Size: 152\*50\*16mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VYS-12018P	220-240VAC	12V, 18W	No	≥0.8	127*50*12.8	IP20
VYS-12018P-R	220-240VAC	12V, 18W	Yes	≥0.8	127*50*12.8	IP20
VYS-12024P	220-240VAC	12V, 24W	No	≥0.8	127*50*12.8	IP20
VYS-12024P-R	220-240VAC	12V, 24W	Yes	≥0.8	127*50*12.8	IP20
ORC-12036P01	220-240VAC	12V, 36W	No	≥0.95	152*50*16	IP44
ORC-12036P01-R	220-240VAC	12V, 36W	Yes	≥0.95	152*50*16	IP44

适用于/Fit for



## CCC一体化电源

For LED Mirror 2 In 1 Power Supply 12W-60W

- 输入：220-240VAC
  - IP20 防水等级
  - 3年质保
  - 单极PFC
  - 欠压/过压/过载/短路保护
  - 开关：单/双按键，无极调光，缓开缓灭，一小时断灯断防雾，可定制
- 
- Input: 220-240VAC
  - IP20 design for indoor
  - 3 years warranty
  - Passive PFC function
  - Undervoltage/overvoltage/overload/short circuit protection
  - Touch Key: Single key/double keys/Dimming/CCT/heating control/auto-off anti-fog/memory function



尺寸/Size: 130\*123\*12.8mm



尺寸/Size: 170\*122\*12.8mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
ORC-12012Y05-1NUAH	220-240VAC	12V, 12W	No	≥0.8	110*97*12.8	IP20
ORC-12012Y04-2RUAN	220-240VAC	12V, 12W	Yes	≥0.8	112*44.5*12.8	IP20
ORC-12024Y02-1NUAH	220-240VAC	12V, 24W	No	≥0.8	130*123*12.8	IP20
ORC-12024Y02-1RUAH	220-240VAC	12V, 24W	Yes	≥0.8	130*123*12.8	IP20
ORC-12036Y03-1NUAH	220-240VAC	12V, 36W	No	≥0.95	170*122*12.8	IP20
ORC-12036Y03-1RUAH	220-240VAC	12V, 36W	Yes	≥0.95	170*122*12.8	IP20
ORC-12045Y06-1NUAH	220-240VAC	12V, 45W	No	≥0.95	190*123*16.8	IP20
ORC-12045Y06-1RUAH	220-240VAC	12V, 45W	Yes	≥0.95	190*123*16.8	IP20
ORC-12060Y06-1NUAH	220-240VAC	12V, 60W	No	≥0.95	190*123*16.8	IP20
ORC-12060Y06-1RUAH	220-240VAC	12V, 60W	Yes	≥0.95	190*123*16.8	IP20

## UL双级PFC电源

Built-In Active PFC Function 24W-60W

- 输入：100-277VAC
- IP44防水等级
- 2年质保
- 无频闪
- Class2, ClassP, Type HL
- 欠压/过压/过载/短路保护



尺寸/Size: 152\*50\*16mm



- Wide input 100-277VAC
- IP44 rating
- 2 years warranty
- Flicker-free light
- Class2, ClassP, Type HL
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 187\*50\*16.8mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12024VP01-UXWCD	100-277VAC	12V, 24W	No	≥0.95	152*50*16	IP44
VW-12036VP01-UXWCD	100-277VAC	12V, 36W	No	≥0.95	152*50*16	IP44
VW-12048VP02-UXWCD	100-277VAC	12V, 48W	No	≥0.95	187*50*16.8	IP44
VW-12060VP02-UXWCD	100-277VAC	12V, 60W	No	≥0.95	187*50*16.8	IP44

适用于/Fit for



## UL常规电源

Normal Power Supply 18W-150W

- 输入：100-277VAC
- IP44防水等级
- 2年质保
- 无频闪
- Class2, ClassP, Type HL
- 欠压/过压/过载/短路保护



尺寸/Size: 152\*50\*16mm

- Wide input 100-277VAC
- IP44 rating
- 2 years warranty
- Flicker-free light
- Class2, ClassP, Type HL
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 187\*50\*16.8mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
OR-12018VP01-UXWCD	100-277VAC	12V, 18W	Yes	≥0.5	152*50*16	IP44
OR-12024VP01-UXWCD	100-277VAC	12V, 24W	Yes	≥0.5	152*50*16	IP44
OR-12036VP01-UXWCD	100-277VAC	12V, 36W	Yes	≥0.5	152*50*16	IP44
OR-12048VP02-UXWCD	100-277VAC	12V, 48W	Yes	≥0.5	187*50*16.8	IP44
OR-12060VP02-UXWCD	100-277VAC	12V, 60W	Yes	≥0.5	187*50*16.8	IP44
OR-12072VP02-UXWCD	100-277VAC	12V, 72W	Yes	≥0.5	187*50*16.8	IP44
OR-12080VP03-UXWCD	100-277VAC	12V, 80W	Yes	≥0.5	210*70*19	IP44
OR-12100VP03-UXWCD	100-277VAC	12V, 100W	Yes	≥0.5	210*70*19	IP44
OR-24150VP03-UXWCD	100-277VAC	24V, 150W	Yes	≥0.5	210*70*19	IP44

## UL超薄经济款电源

Ultra-Slim Cost-Effective 18W-36W

- 输入：100-277VAC
  - IP20防水等级
  - 2年质保
  - 无频闪
  - Class2, ClassP, Type HL
  - 欠压/过压/过载/短路保护
- 
- Wide input 100-277VAC
  - IP20 rating
  - 2 years warranty
  - Flicker-free light
  - Class2, ClassP, Type HL
  - Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 127\*50\*12.8mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
OR-12018VP-UXWND	100-277VAC	12V, 18W	Yes	≥0.5	127*50*12.8	IP20
OR-12024VP-UXWND	100-277VAC	12V, 24W	Yes	≥0.5	127*50*12.8	IP20
OR-12036VP-UXWND	100-277VAC	12V, 36W	Yes	≥0.5	127*50*12.8	IP20

### UL认证型号命名解释:

OR-12018VP01 - U X W C D:

A B C D

A="X" or "R", "X" 表示不带内置继电器, "R" 表示带内置继电器.

B="W" or "L", "W" 表示宽压输入100-277VAC, "L" 表示输入电压100-120VAC.

C="C" or "N", "C" 表示FCC认证, "N" 表示无FCC认证.

D="D" or "H", "D" 表示电子线, "H" 表示护套线.

### Explanation of UL certified model designation:

OR-12018VP01 - U X W C D:

A B C D

A="X" or "R", "X" means without heating control function, "R" means with heating control function.

B="W" or "L", "W" means wide input voltage 100-277VAC, "L" means input voltage 100-120VAC.

C="C" or "N", "C" means FCC, "N" means without FCC.

D="D" or "H", "D" means flying leads, "H" means jacketed cables, "F" means plug wires.

## 防水铝壳电源

Waterproof Aluminium 12W-120W

- 输入: 100-240VAC
- IP67防水等级
- 2年质保
- 欠压/过压/过载/短路保护



尺寸/Size: 147\*40\*21mm

- Input: 100-240VAC
- IP67 rating
- 2 years warranty
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 282\*40\*21mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12012-N	100-240VAC	12V, 12W	No	≥0.5	105*30*20	IP67
VW-12020-N	100-240VAC	12V, 20W	Yes	≥0.5	132*30*20	IP67
VW-12024-N	100-240VAC	12V, 24W	Yes	≥0.5	152*30*20	IP67
VW-12030-N	100-240VAC	12V, 30W	Yes	≥0.5	182*30*20	IP67
VW-12036-S	100-240VAC	12V, 36W	Yes	≥0.5	147*40*21	IP67
VW-12045-S	100-240VAC	12V, 45W	Yes	≥0.5	147*40*21	IP67
VW-12060-S	100-240VAC	12V, 60W	Yes	≥0.5	178*40*21	IP67
VW-12072-L	100-240VAC	12V, 72W	Yes	≥0.5	252*40*21	IP67
VW-12100-L	100-240VAC	12V, 100W	Yes	≥0.5	282*40*21	IP67
VW-12120-L	100-240VAC	12V, 120W	Yes	≥0.5	282*40*21	IP67

## 超薄铝壳防水电源

Super Slim Waterproof 24W-72W

- 输入: 100-240VAC
- 2年质保
- 超薄厚度13mm
- IP67防水等级
- 欠压/过压/过载/短路保护



尺寸/Size: 170\*40\*13mm



- Input: 100-240VAC
- 2 years warranty
- Super slim 13mm
- IP67 rating
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 200\*40\*13mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12024-UT	100-240VAC	12V, 24W	Yes	≥0.5	170*40*13	IP67
VW-12036-UT	100-240VAC	12V, 36W	Yes	≥0.5	170*40*13	IP67
VW-12045-UT	100-240VAC	12V, 45W	Yes	≥0.5	200*40*13	IP67
VW-12060-UT	100-240VAC	12V, 60W	Yes	≥0.5	200*40*13	IP67
VW-12072-UT	100-240VAC	12V, 72W	Yes	≥0.5	200*40*13	IP67

适用于/Fit for



## 高性价比超薄铝壳防水电源

Cost-Effective Super Slim Waterproof 24W-60W

- 输入: 100-240VAC
- 2年质保
- 超薄厚度12.5mm
- IP67防水等级
- 欠压/过压/过载/短路保护



尺寸/Size: 140\*42\*12.5mm



- Input: 100-240VAC
- 2 years warranty
- Super slim 12.5mm
- IP67 rating
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 170\*42\*12.5mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12024-UT-III	100-240VAC	12V, 24W	Yes	≥0.5	140*42*12.5	IP67
VW-12036-UT-III	100-240VAC	12V, 36W	Yes	≥0.5	140*42*12.5	IP67
VW-12045-UT-III	100-240VAC	12V, 45W	Yes	≥0.5	170*42*12.5	IP67
VW-12060-UT-III	100-240VAC	12V, 60W	Yes	≥0.5	170*42*12.5	IP67

适用于/Fit for



## 经济款铝壳防水电源

Waterproof Cost-Effective Power Supply

- 输入: 170-250VAC
- IP67防水等级
- 2年质保
- 内置继电器设计
- 欠压/过压/过载/短路保护



尺寸/Size: 130\*30\*20mm

- Input: 170-250VAC
- IP67 rating
- 2 years warranty
- Built-in relay design
- Undervoltage/overvoltage/overload/short circuit protection




尺寸/Size: 200\*30\*20mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12024-C	170-250VAC	12V, 24W	No	≥0.5	130*30*20	IP67
VW-12036-C	170-250VAC	12V, 36W	No	≥0.5	160*30*20	IP67
VW-12045-C	170-250VAC	12V, 45W	No	≥0.5	180*30*20	IP67
VW-12060-C	170-250VAC	12V, 60W	No	≥0.5	200*30*20	IP67
VW-12072-C	170-250VAC	12V, 72W	No	≥0.5	178*40*21	IP67
VW-12024-CTR	170-250VAC	12V, 24W	yes	≥0.5	130*30*20	IP67
VW-12036-CTR	170-250VAC	12V, 36W	yes	≥0.5	160*30*20	IP67
VW-12045-CTR	170-250VAC	12V, 45W	yes	≥0.5	180*30*20	IP67
VW-12060-CTR	170-250VAC	12V, 60W	yes	≥0.5	200*30*20	IP67
VW-12072-CTR	170-250VAC	12V, 72W	yes	≥0.5	178*40*21	IP67

## 廉价款胶壳防水电源

Waterproof Budget Power Supply

- 输入: 100-250VAC
- IP67防水等级
- 2年质保
- 内置继电器设计
- 欠压/过压/过载/短路保护

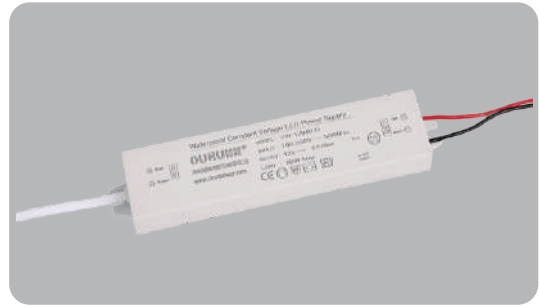

尺寸/Size: 180\*30\*20mm

- Input: 100-250VAC
- IP67 design for indoor or outdoor
- 2 years warranty
- Built-in relay design
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 180\*40\*19.5mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12024-D	100-250VAC	12V, 24W	No	≥0.5	180*30*20	IP67
VW-12036-D	100-250VAC	12V, 36W	No	≥0.5	180*30*20	IP67
VW-12045-D	100-250VAC	12V, 45W	No	≥0.5	180*40*19.5	IP67
VW-12060-D	100-250VAC	12V, 60W	No	≥0.5	180*40*19.5	IP67
VW-12024-DTR	100-250VAC	12V, 24W	Yes	≥0.5	180*30*20	IP67
VW-12036-DTR	100-250VAC	12V, 36W	Yes	≥0.5	180*30*20	IP67
VW-12045-DTR	100-250VAC	12V, 45W	Yes	≥0.5	180*40*19.5	IP67
VW-12060-DTR	100-250VAC	12V, 60W	Yes	≥0.5	180*40*19.5	IP67

## 性价比超薄胶壳电源


Cost-effective Plastic Housing 24W-60W

- 输入: 100-250VAC
- 2年质保
- 超薄厚度12.8mm
- IP20防水等级
- 欠压/过压/过载/短路保护



尺寸/Size: 127\*50\*12.8mm

- Input: 100-250VAC
- 2 years warranty
- Super slim 12.8mm
- IP20 rating
- Undervoltage/overvoltage/overload/short circuit protection

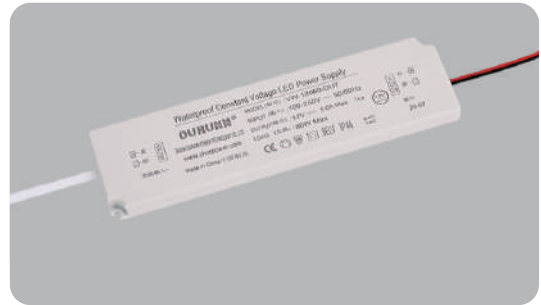


尺寸/Size: 185\*50\*13mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12024-DUT	100-250VAC	12V, 24W	No	≥0.5	127*50*12.8	IP20
VW-12036-DUT	100-250VAC	12V, 36W	No	≥0.5	127*50*12.8	IP20
VW-12045-DUT	100-250VAC	12V, 45W	No	≥0.5	185*50*13	IP20
VW-12060-DUT	100-250VAC	12V, 60W	No	≥0.5	185*50*13	IP20
VW-12024-DUTR	100-250VAC	12V, 24W	Yes	≥0.5	127*50*12.8	IP20
VW-12036-DUTR	100-250VAC	12V, 36W	Yes	≥0.5	127*50*12.8	IP20
VW-12045-DUTR	100-250VAC	12V, 45W	Yes	≥0.5	185*50*13	IP20
VW-12060-DUTR	100-250VAC	12V, 60W	Yes	≥0.5	185*50*13	IP20

## 超薄胶壳电源

Super Slim Plastic Housing 12W-36W

- 输入: 100-250VAC
- IP20防水等级
- 2年质保
- 超薄厚度11mm
- 机身: 塑胶壳, 灌封硅胶
- 欠压/过压/过载/短路保护

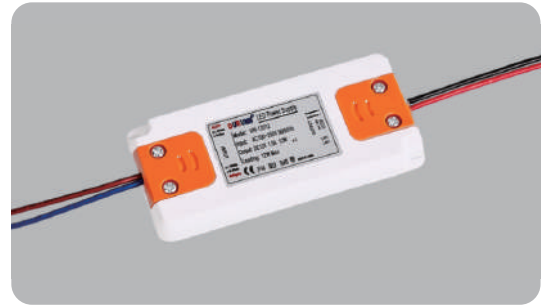

尺寸/Size: 98\*46\*11mm



- Input: 100-250VAC
- IP20 rating
- 2 years warranty
- Super slim 11mm
- Body: plastic, silicone potting
- Undervoltage/overvoltage/overload/short circuit protection



尺寸/Size: 128\*50\*11mm

型号 Model	输入 Input	输出 Output	内置继电器 Defogging	功率因数 PF	尺寸 Size(mm)	防水等级 IP Rating
VW-12012-PUT	100-250VAC	12V, 12W	No	≥0.5	98*46*11	IP20
VW-12024-PUT	100-250VAC	12V, 24W	No	≥0.5	128*50*11	IP20
VW-12036-PUT	100-250VAC	12V, 36W	No	≥0.5	128*50*11	IP20
VW-12012-PUTR	100-250VAC	12V, 12W	Yes	≥0.5	98*46*11	IP20
VW-12024-PUTR	100-250VAC	12V, 24W	Yes	≥0.5	128*50*11	IP20
VW-12036-PUTR	100-250VAC	12V, 36W	Yes	≥0.5	128*50*11	IP20

适用于/Fit for

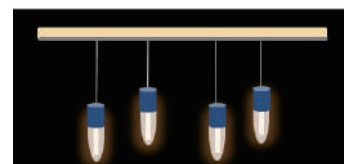


## LED镜用感应开关

For LED Mirror Sensor Switch



单键触摸开关  
Single Touch Switch

输入电压/Input Voltage: DC 12V/24V  
 负载/Loading: 60W max  
 功能/Function: 调光/调色/除雾控制/dimming/CCT/heating control  
 尺寸/Size(mm): 70\*53\*8.5  
 调光范围/Dimming Range: 10%-100%



双键触摸开关  
Double Touch Switch

输入电压/Input Voltage: DC 12V/24V  
 负载/Loading: 60W max  
 功能/Function: 调光/调色/除雾控制/dimming/CCT/heating control  
 尺寸/Size(mm): 110\*63\*9  
 调光范围/Dimming Range: 10%-100%  
 图标间距/Icons Spacing: 25/39mm



三键触摸开关  
Three-Touch Switch

输入电压/Input Voltage: DC 12V/24V  
 负载/Loading: 60W max  
 功能/Function: 调光/调色/除雾控制/dimming/CCT/heating control  
 尺寸/Size(mm): 118\*72.5\*12  
 调光范围/Dimming Range: 10%-100%  
 图标间距/Icons Spacing: 25mm



双键触摸开关带时钟  
Double Touch Switch With Clock

输入电压/Input Voltage: DC 12V/24V  
 负载/Loading: 60W max  
 功能/Function: 调光/调色/除雾控制/时间显示  
 /dimming/CCT/heating control/time showing  
 尺寸/Size(mm): 110\*72.5\*12  
 调光范围/Dimming Range: 10%-100%



手扫开关  
Hand Wave Switch

输入电压/Input Voltage: DC 12V/24V  
 负载/Loading: 60W max  
 功能/Function: 调光/调色/除雾控制/dimming/CCT/heating control  
 尺寸/Size(mm): 70\*53\*8.5  
 调光范围/Dimming Range: 10%-100%  
 感应距离/Detection Distance: <10cm



雷达开关  
Radar Switch

输入电压/Input Voltage: DC 12V/24V  
 负载/Loading: 60W max  
 功能/Function: 调光/除雾控制/dimming/heating control  
 尺寸/Size(mm): 70\*53\*8.5  
 调光范围/Dimming Range: 10%-100%  
 熄灯时间/Lights Off Time: 30S  
 感应距离/Detection Distance: 1.5m

# LED镜用2合1电源

For LED Mirror 2 In 1 Power Supply 12W-60W

输入/Input: 100-250VAC

功能/Function: 调光/调色/除雾/自动关闭除雾/记忆储存/时钟显示  
Dimming/CCT/heating control/auto-off anti-fog/  
memory function/clock display

触摸键/Touch Key: 单键/双键/三键Single key/double keys/three keys

质保/Warranty: 2 years

单按键/Single key:


- Ⓞ 短按/Short touch: 开/关/调色温/On/Off/adjust CCT
- Ⓞ 长按/Holding touch: 调光范围20%-100%/Dimming from 20%-100%

双按键/Double keys:

- Ⓞ 短按/Short touch: 开/关/调色温/On/Off/adjust CCT
- Ⓞ 长按/Holding touch: 调光范围20%-100%/Dimming from 20%-100%
- Ⓞ 短按/Short touch: 开启/关闭除雾/heating on/off

三按键/Three keys:

- Ⓞ 短按/Short touch: 开/关/On/Off
- Ⓞ 长按/Holding touch: 调光范围20%-100%/Dimming from 20%-100%
- Ⓞ 短按/Short touch: 调色温/Colors change
- Ⓞ 短按/Short touch: 开启/关闭除雾/heating on/off

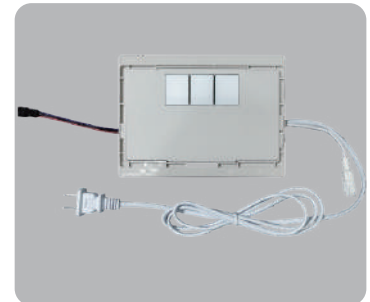

型号 Model	输入 Input	输出 Output	除雾 Defogging	按键 Keys	功能 Function	尺寸 Size(mm)
VW-12024Y01-1RUAH	100-250VAC	12V, 24W	Yes	1,2	Dimming/CCT	123*112*12.8
VW-12036Y01-1RUAH	100-250VAC	12V, 36W	Yes	1,2	Dimming/CCT	123*112*12.8
VW-12045Y03-1RUAH	100-250VAC	12V, 45W	Yes	1,2,3	Dimming/CCT	170*112*12.8
VW-12060Y03-1RUAH	100-250VAC	12V, 60W	Yes	1,2,3	Dimming/CCT	170*112*12.8
VW-12024Y04-1RUAH	220-240VAC	12V, 24W	Yes	1,2	Dimming/CCT	110*97*12.8
VW-12036Y04-1RUAH	220-240VAC	12V, 36W	Yes	1,2	Dimming/CCT	110*97*12.8
VW-12024-ISTR+DP	100-250VAC	12V, 24W	Yes	2	Dimming/CCT/Clock	160*110*13.5
VW-12036-ISTR+DP	100-250VAC	12V, 36W	Yes	2	Dimming/CCT/Clock	160*110*13.5

**OURUNN**<sup>®</sup>

珠海欧瑞电源科技有限公司  
Zhuhai Ourunn Power Technology Co., Ltd

地址：珠海市香洲区华宇路611、613号5号楼4层405号

Add: 4/F, Building 5, No. 611, 613 Huayu Road, Xiangzhou District, Zhuhai, Guangdong, China

网址/Web: [www.zhorpower.com](http://www.zhorpower.com)

电话/Tel: 86 756-8628920

邮箱/Email: [sales2@zhorpower.com](mailto:sales2@zhorpower.com) [sales3@zhorpower.com](mailto:sales3@zhorpower.com)