



600 X 600 MM
PORCELAIN TILES

GLOSSY COLLECATION

**GLOSSY
SERIES**

APPLICATIONS



WHITE BODY


**600MMx600MM
PORCELAIN TILES**



11001



11002

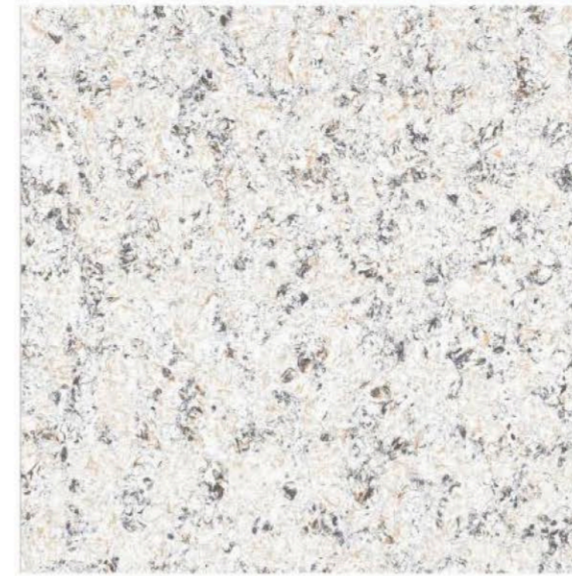

11007



11008



11003



11004



11005



11006



**GLOSSY
SERIES**

APPLICATIONS



WHITE BODY


**600MMx600MM
PORCELAIN TILES**



11009



11010

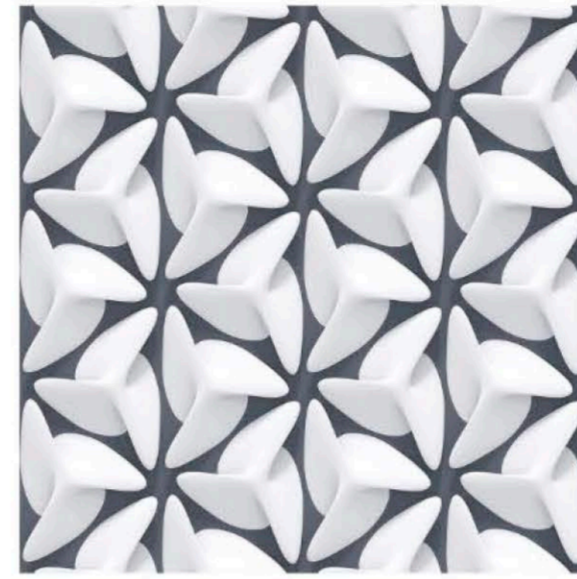


11015



11016




11011

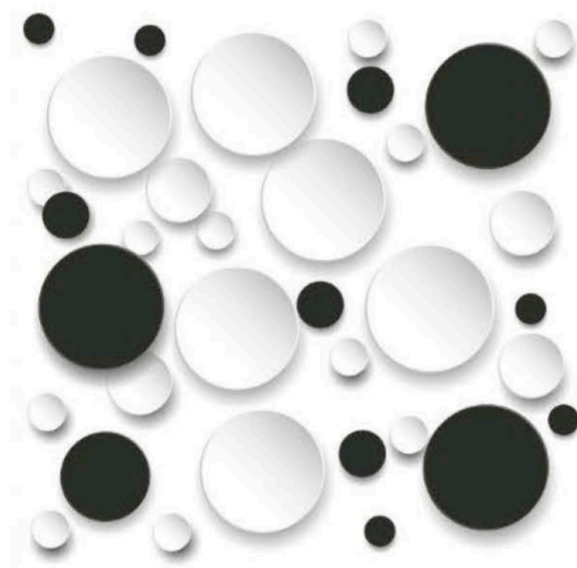

11012



11013

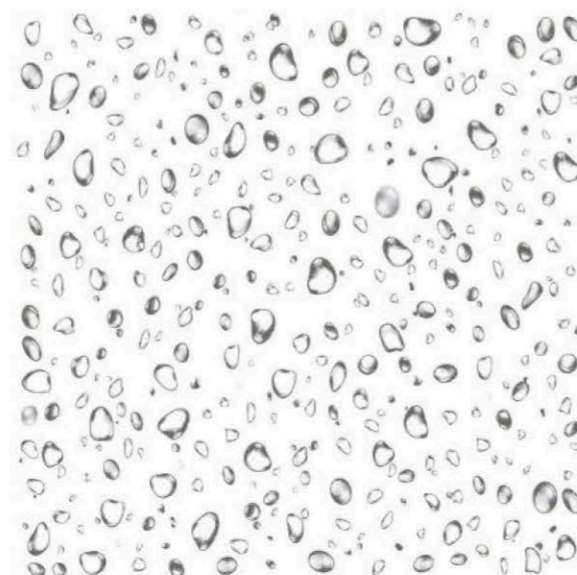

11014



**GLOSSY
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11017



11018



11023




11024




11019



11020

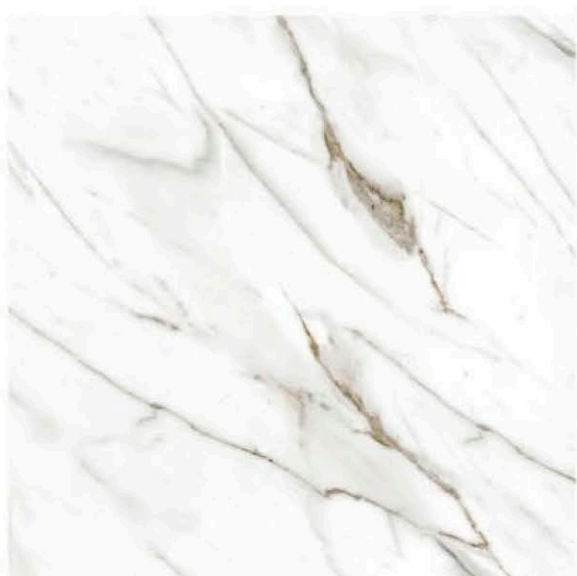

11021

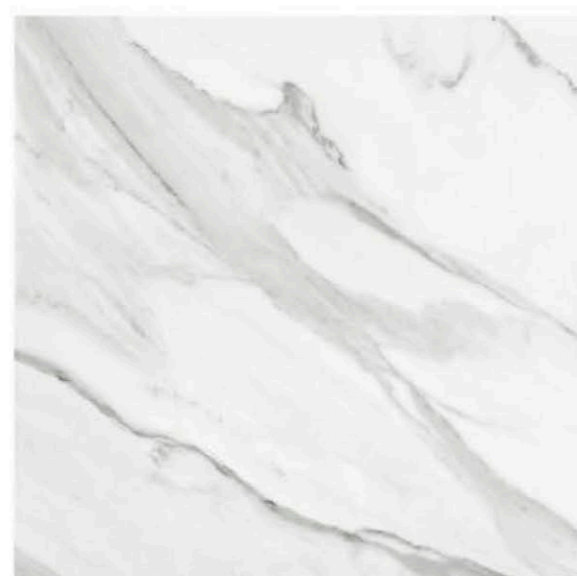

11022

**GLOSSY
SERIES**

APPLICATIONS




WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11025

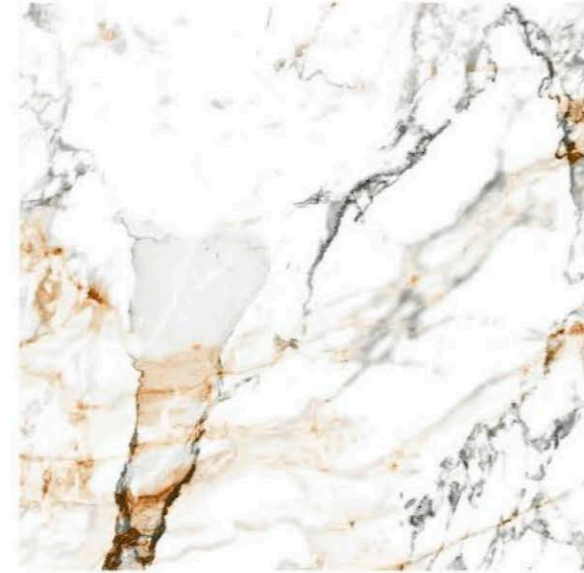

11026




11031




11032




11027

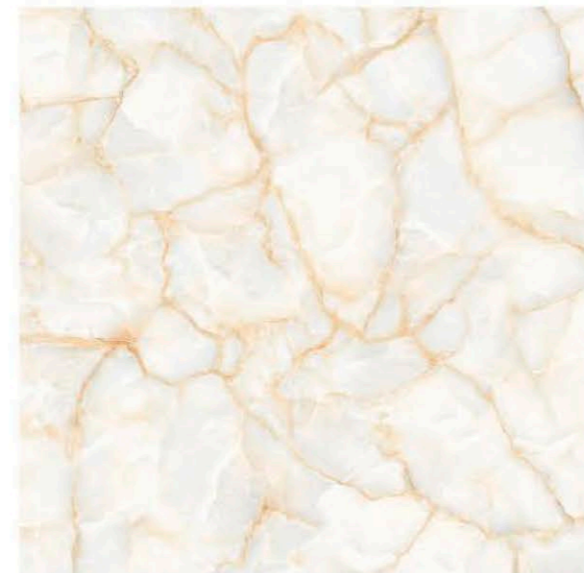

11028

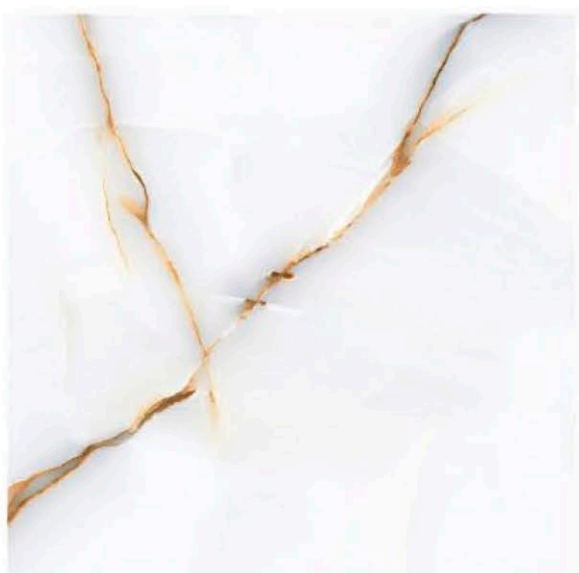

11029

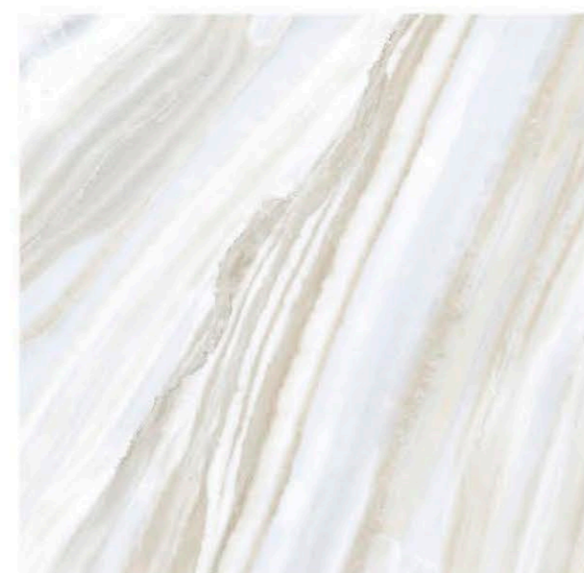

11030



**GLOSSY
SERIES**

APPLICATIONS




WHITE BODY

**600MMx600MM
PORCELAIN TILES**



11033

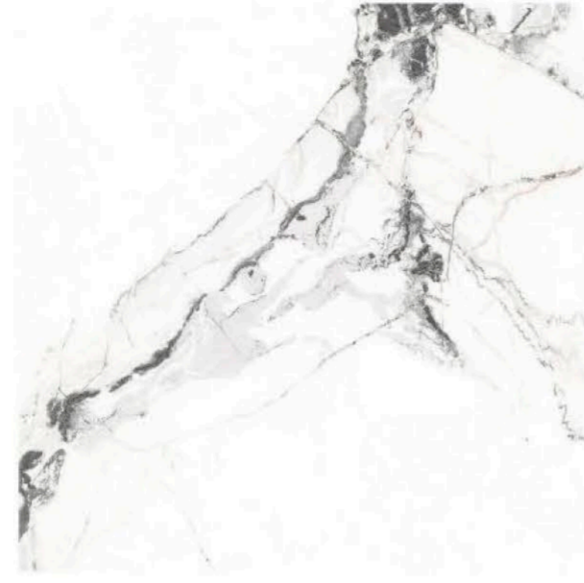

11034



11039



11040



11035



11036



11037



11038



**GLOSSY
SERIES**

APPLICATIONS



WHITE BODY

**600MMx600MM
PORCELAIN TILES**




11041



11042




11043

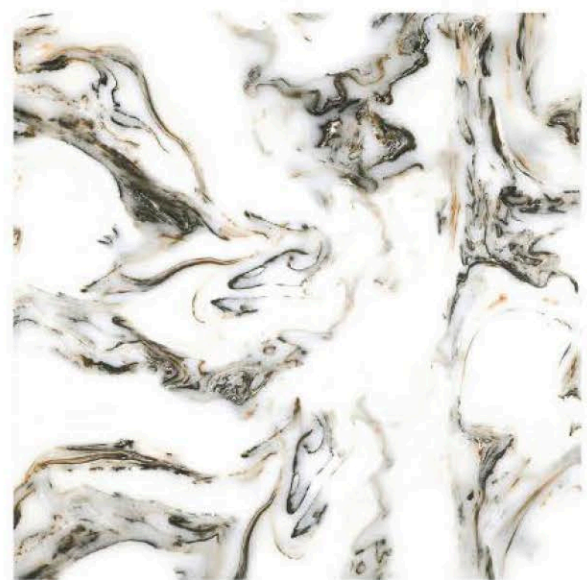

11044




11045

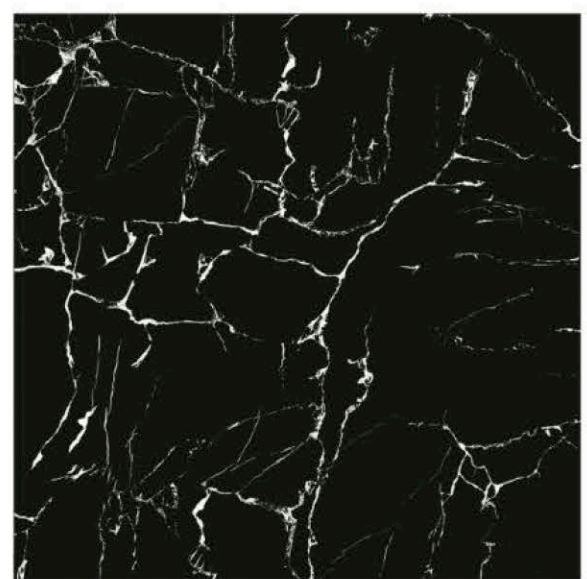

11046



11047

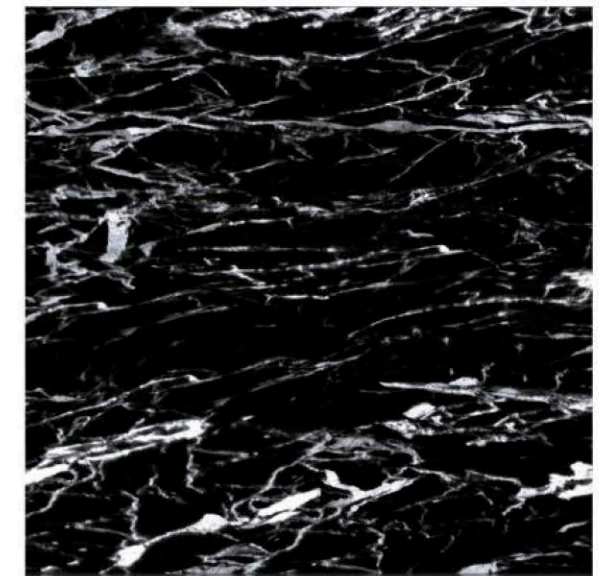

11048



TECHNICAL SPECIFICATION

Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	± 3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545 - 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	NIII	NIII	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note : Colour Shown are as accurate as the limitations of the printing process will allow. Prospective Customer Are advised to inspect a sample of the tiles before ordering every effort has been made to ensure the Accuracy of the information given. However, the Company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing Instruction on the cartons of the tiles as on responsibility can be accepted by the company once the tiles have been fixed.

PACKING DETAIL

Size	Thickness	No. of Tiles	Area Approx.	Weight Approx.
600 X 600 MM	9 MM	4 Pcs.	1.44 Sq. Mtr.	25 Kg.

UTILITY OF FLOOR TILES

