


CATALOG

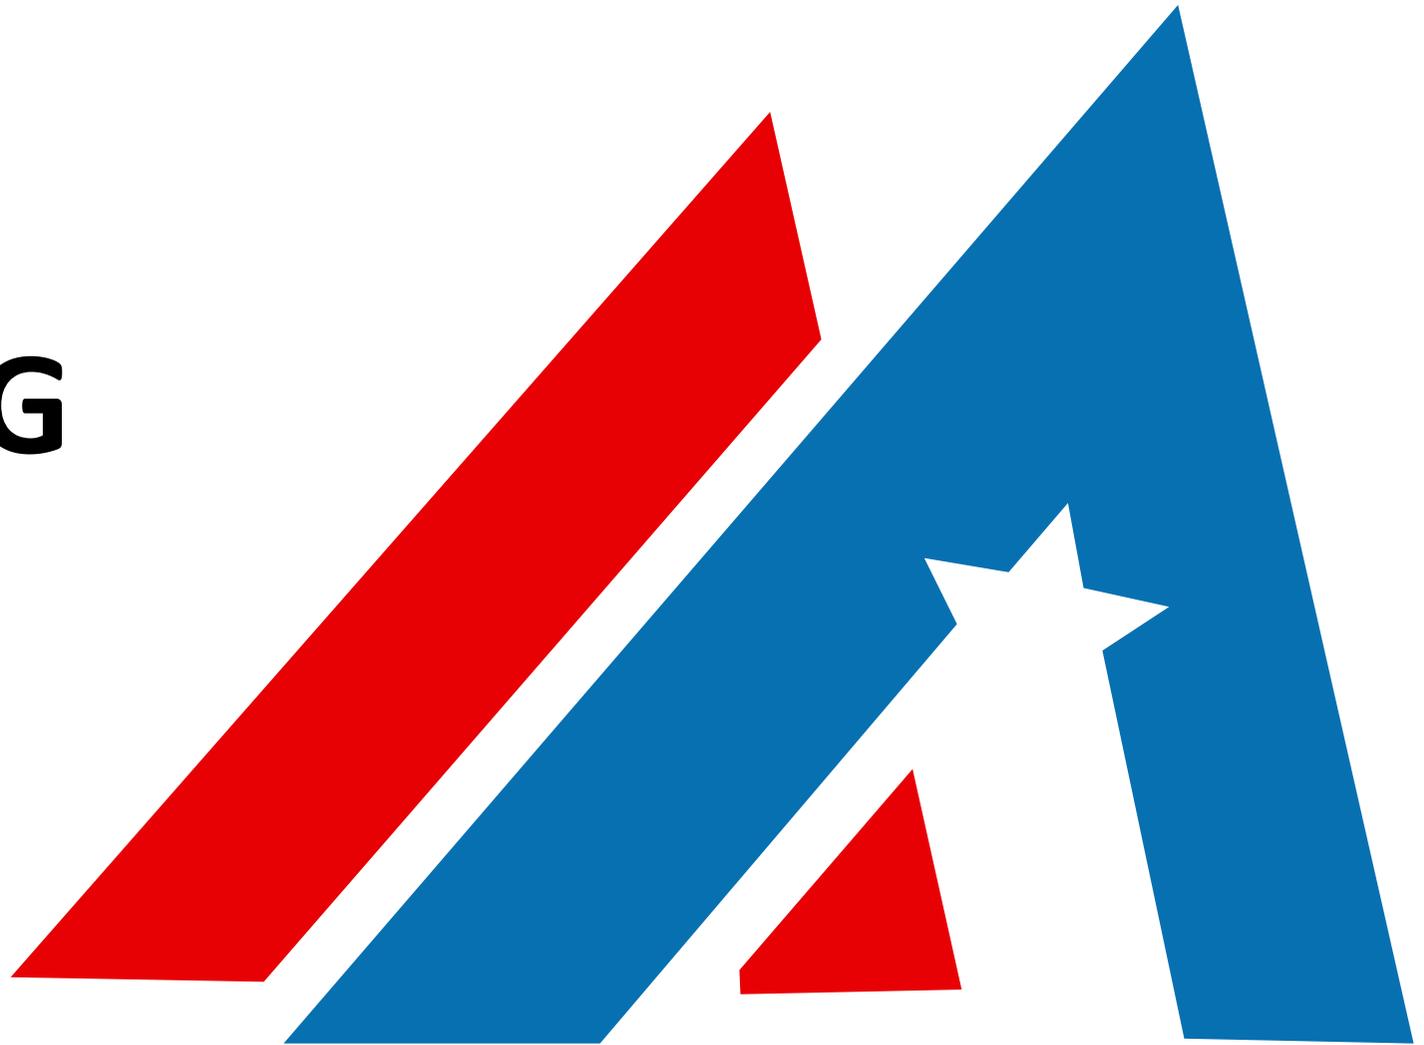

QINHUANGDAO CITY AOSENER EQUIPMENT AND GARMENT LIMITED COMPANY

2023

Company profile

Qinhuangdao Aosener Equipment and Garment Co., Ltd located in Qinhuangdao City, Hebei Province, has a long history of development and glorious military industry tradition, originally the earliest military equipment production enterprise directly under the General Logistics Department of our army- the 3524 factory of the Chinese People's Liberation Army. After 34 years of military and 20 years of policy restructuring, the enterprise is the most competitive private military enterprise in China that integrates R&D, production, sales and service, specializing in providing camping equipment, military equipment, military supplies and emergency disaster relief products to the military and government.

The factory was founded in Chengde City in 1968. In 1992, in response to the call of the Central Military Commission, the factory implemented a large-scale strategic transfer, moving from the deep mountainous area of Chengde to the coastal city of Qinhuangdao. In 2002, the state implemented a policy bankruptcy restructuring of the 3524 factory, and Aosener Equipment and Garment Co., Ltd. was registered. The company covers an area of more than 400 acres, with a registered capital of 130 million yuan, more than 800 employees, more than 80 professional and technical personnel, and total assets of 660 million yuan.

The company's main products cover camping equipment, military equipment, military supplies, emergency disaster protection four aspects of eight categories of more than 1,500 varieties, of which **camping equipment series** include: various standard and non-standard tents, various carside tents, special tents, heaters, generators, cooling and heating fans, various standard heating stoves, various shower box group toilets, various models of water storage bags, various models of water transport bags, standard camp equipment (soldier cabinets, officer lockers, bunk beds, marching beds, folding tables and chairs, etc.); **Military equipment series** include: all kinds of individual tents, gun protective gear, gun clothing, artillery clothing, bullet bags, cover cloths, car tarpaulins, belts, various backpacks and backpacks, carrying gear, front transport bags, left-behind bags, various functional camouflage nets, body armor, bulletproof helmets, military shoulder bags, etc.; **Military quilt series include**: all kinds of standard clothing, quilts, cotton mattresses, pillows, sheets, quilt covers, cotton mat tires, cotton cushion covers, sleeping mats, sleeping bags, hats, raincoats, air cushions, mosquito nets, etc.; **Emergency disaster protection series** include: various specifications of disaster relief tents, cotton bedding, cotton pants, emergency kits, emergency lights, heating stoves, disaster relief buckets, disaster relief water tanks, inflatable mattresses, medical disposable masks, medical disposable protective clothing, disaster relief folding beds, disaster relief folding tables and chairs, etc., the products sell well in more than 50 countries and regions at home and abroad.

Excellent corporate reputation, standardized management, excellent product quality and market-leading scientific and technological research and development capabilities, so that enterprises gradually stand out in the industry. The company has successively won the "designated production enterprise of camping equipment of the General Logistics Department of the Chinese People's Liberation Army", "Contractor of the General Armament Department of the Chinese People's Liberation Army", "Designated R&D Enterprise of Camping Equipment of the Armed Police Headquarters", "Camping Equipment and Military Supplies of the Armed Police Headquarters Loaded into the Fence and Production Enterprise", "11th Five-Year Plan", "Twelfth Five-Year Plan" and "Thirteenth Five-Year Plan" Camping Equipment R&D Trial Production Unit", "Chinese People's Liberation Army General Logistics Department Construction Engineering Research Institute Camping Equipment Trial Production Base", "Chinese PLA General Logistics Department Military Transportation Research Institute Trial Production Unit", "National Emergency Management Ministry Designated R&D Enterprise", "China Charity Federation Northern Only Partner", "National High-tech Enterprise", "Hebei Provincial Technology Center", "Hebei Province Industrial Design Center", "Hebei Province Contract-abiding and Trustworthy Enterprise", "Hebei Province Civil-Military Integration Enterprise", "Hebei Province Manufacturing Single Champion Enterprise", "Hebei Province Specialized and Special New Enterprise", "Hebei Province Emergency Material Production Capacity Reserve Base", "Science and Technology Enterprise", "Qinhuangdao Advanced Growth Enterprise", "Qinhuangdao Entrepreneurial Pioneer", "Qinhuangdao Top Ten Growth Enterprises", "Qinhuangdao Civilized Enterprise", "Qinhuangdao Health Promotion Enterprise", "Qinhuangdao Emergency Disaster Material Reserve Unit" and many other qualifications and honors. Chairman and General Manager Zhang Xiangyang also won many honorary titles such as "Entrepreneurial Hero of Hebei Province", "Entrepreneurial Pioneer of Qinhuangdao City", "May Day Labor Medal of Qinhuangdao City", "Deputy of the People's Congress of Qinhuangdao Port District" and so on.

CONTENT



MILITARY SUPPLIES	5
1、 Two-person cotton tent	6
2、 5-person portable single layer tent	6
3、 5-person portable cotton tent	6
4、 12 m ² pole type single layer tent	7
5、 Squad cold zone tent	7
6、 Squad cotton tent	7
7、 New type 10 people single layer tent	8
8、 10 people grass green single layer tent	8
9、 37 m ² folding grid tent	8
10、 70 m ² arch single layer tent	9
11、 108 m ² multipurpose tent	9
12、 10 people tropics zone tent	9
13、 168 m ² arch single layer tent	10
14、 Police box	10
15、 6 people double-fly tent	10
16、 72 m ² multipurpose tent	11
17、 20 people single layer pole tent	11
18、 Saddle type three-layer tent	11
19、 10×5 camouflage cotton tent	12
20、 12×9 corps command tent	12
21、 Three prevention tent	12
22、 30 m ² inflatable command tent	13
23、 20 m ² Inflatable command tent	13
24、 Inflatable single layer tent	13
25、 Camping tent	14
26、 Field sleeping bag	14
27、 Envelope sleeping bag	14
28、 Aluminum camp bed	15

29、	Field operation desk	15
30、	2m ³ Soft water storage tank	15
31、	Air pillow type self-inflatable mattress	16
32、	Mattress	16
33、	Folding self inflating mattress	16
34、	Inflatable mattress (Ministry of Public Security)	17
35、	Sleeping mat	17
36、	MC camouflage military uniform	18
37、	20kw air heater	18
38、	40kw air heater	18
39、	Air heater	19
40、	10KW cooling and heating fan/heater	19
41、	Plateau air heater	19
42、	20kw air heater	20
43、	Plateau shift heating furnace	20
44、	Diesel coal dual purpose heating furnace	20
45、	Multi fuel heating furnace	21
46、	Coal wood heating stove	21
	DISASTER RELIEF SUPPLIES/ RED CROSS SUPPLIES	22
1、	8 m ² single layer tent	23
2、	12 m ² single layer tent (2010)	23
3、	12 m ² cotton tent (2010)	23
4、	12 m ² single layer tent (new standard)	24
5、	12 m ² cotton tent (new standard)	24
6、	20 m ² single layer tent	24
7、	20 m ² cotton tent	25
8、	36 m ² single layer tent	25
9、	36 m ² cotton tent	25
10、	15 m ² disaster inflatable tent	26
11、	Simple toilet	26
12、	20 m ² tarpaulin	26
13、	12 m ² cotton tent	27
14、	37 m ² grid command tent	27

15、	60 m ² grid command tent.....	27
16、	Bathing tent suit.....	28
17、	42 m ² inflatable tent.....	28
18、	21.11 m ² grid command tent.....	29
19、	28 m ² inflatable tent.....	29
20、	Awning tent.....	30
21、	10-person rescue tent.....	30
22、	Disaster relief tents.....	30
23、	UNHCR 23 m ² family tent.....	31
24、	UNHCR dome self-standing family tent.....	31
25、	Folding bed.....	32
26、	Oxford folding bed.....	32
27、	Air mattress bed.....	32
28、	Folding table and stool(ABS).....	33
29、	Folding table and stool(Steel).....	33
30、	Wooden folding bed.....	33
31、	Folding bed.....	34
32、	Folding camp bed.....	34
33、	Folding bed.....	34
34、	Knapsack.....	35
35、	Family emergency kit.....	35
36、	Soft water storage tank.....	35
37、	Summer quilt.....	36
38、	Towel blanket.....	36
39、	Polyester blanket.....	36
40、	Cotton quilt (2010 standard).....	37
41、	Wadded cushion.....	37
42、	Cotton coat.....	37
43、	Winter cotton overcoat.....	38
44、	Cotton overcoat.....	38
45、	Cotton coat.....	38
46、	Army green cotton overcoat(87 type).....	39
47、	Multi-functional sleeping bag.....	39

48、 Site lighting	39
OUTDOOR SUPPLIES	40
1、 Oxford Cloth Indian Tent	41
2、 Indian Tent + Diamond Canopy	41
3、 Cottage Cotton Tent Medium Size	41
4、 Yurt Bell Tent 4m	42
5、 3m Pyramid Cotton Tent	42
6、 Terylene Tent	42
7、 Small Cotton Shelter (Iron)	43
8、 Cotton Pentagon Indian Tent	43
9、 Terylene Indian Tent Large Size	43
10、 Outdoor tunnel tent	44
11、 Tunnel Camping Tent	44
12、 Three-pole tunnel tent	44
13、 Double Layer Tent	45
14、 One Room Outdoor Tent	45
15、 Two bedroom one living room tent	45
16、 Cotton house inflatable tent	46
17、 7 m ² Camping Inflatable Tent	46
18、 4.4*4.4M butterfly canopy	46

MILITARY SUPPLIES

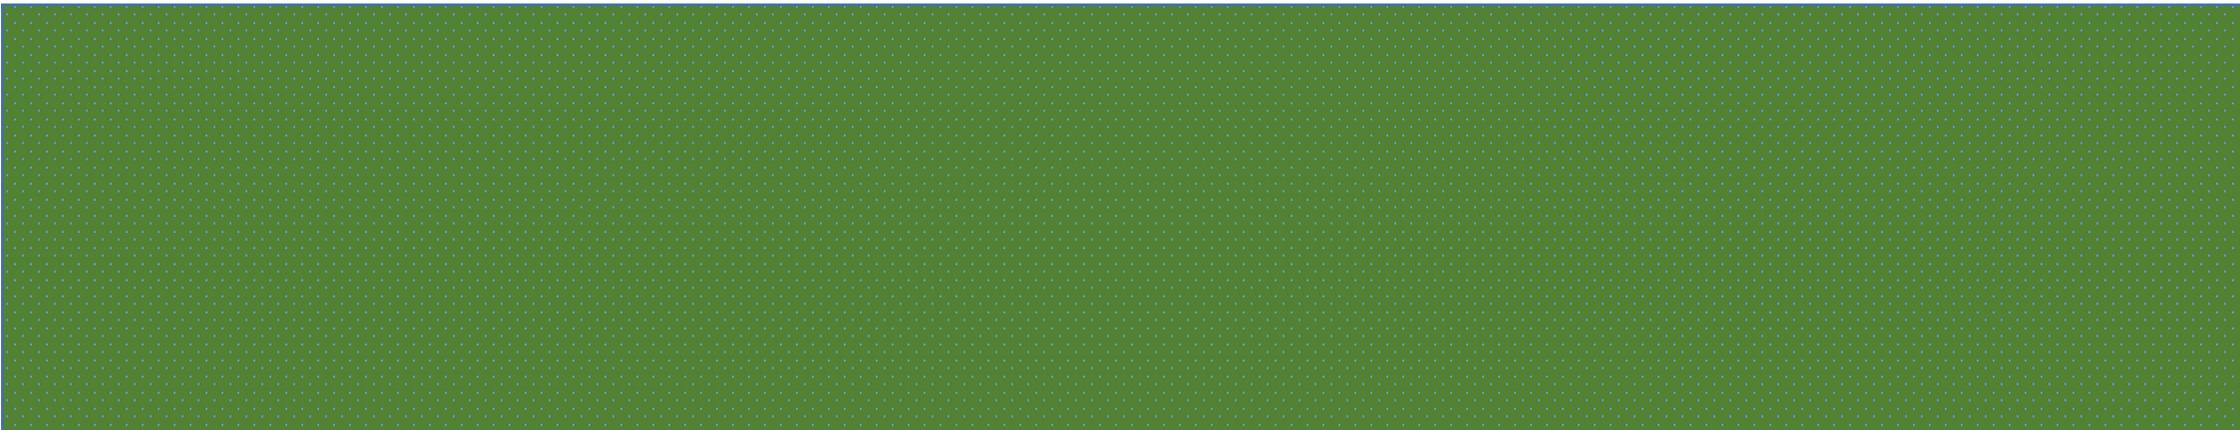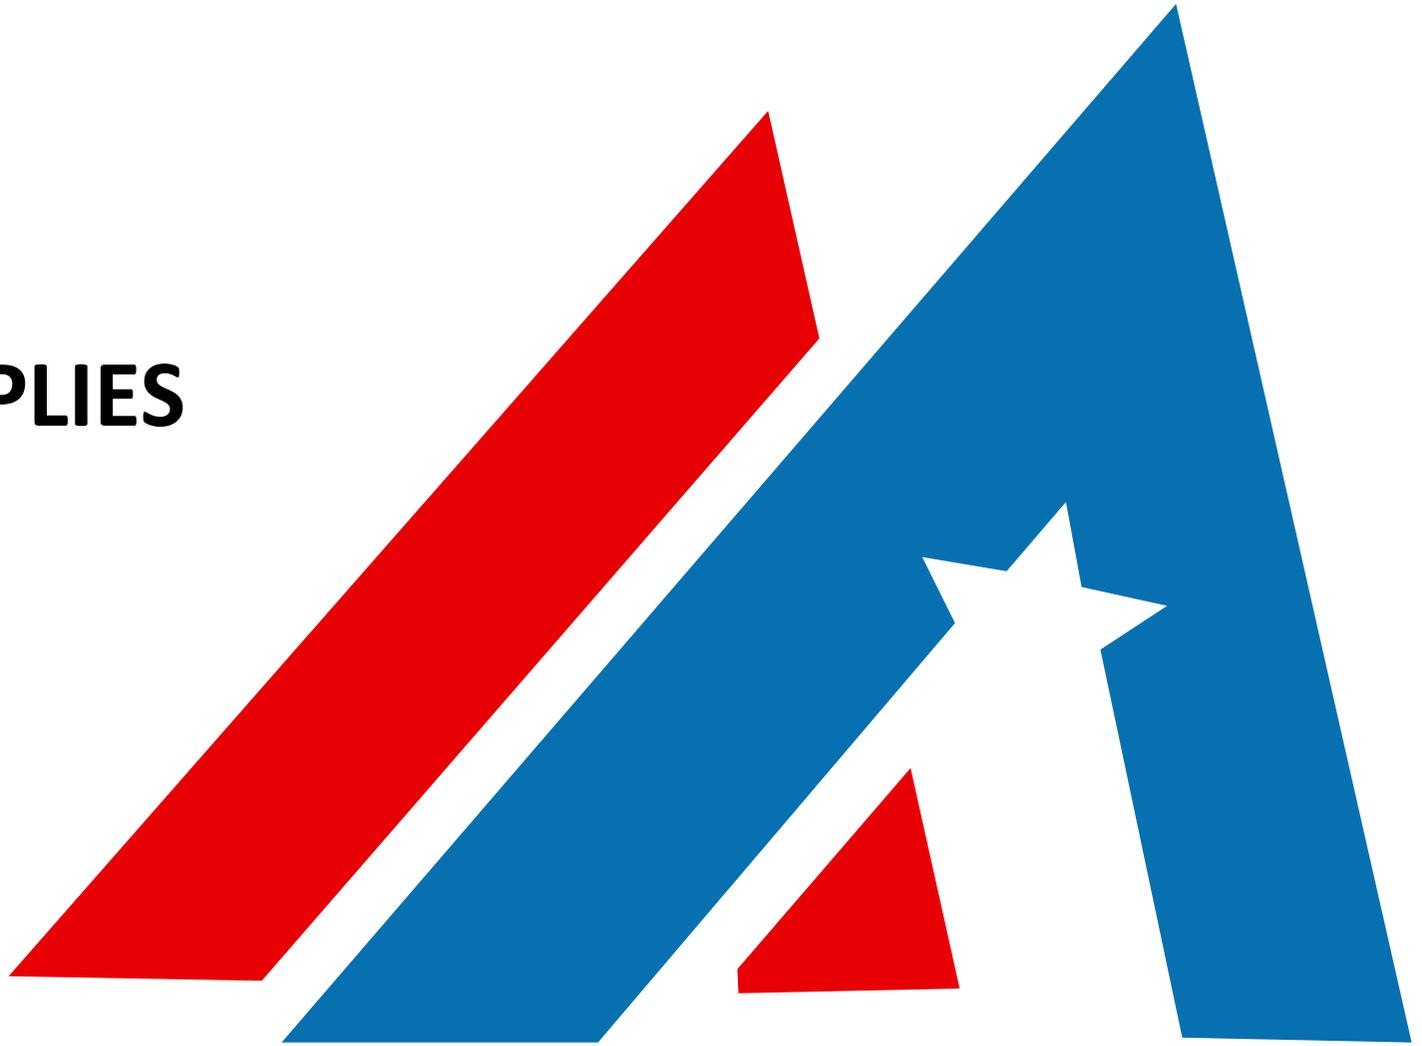

1、 Two-person cotton tent	2、 5-person portable single layer tent	3、 5-person portable cotton tent
		
<p>Material: Face cloth: 28×2/2 grass green polyester waterproof canvas Lining Fabric: 150D white oxford cloth, Thermal insulation layer: 3mm thick needled felt Awning frame: Adopter 30 × 1.5mm electric welded steel pipe, square 25 × 1.2mm Electric welded steel pipe Size: Length 2.5m, width 2.4m, side height 1.4m, top height 2m; Packing size: 680×500×480mm; Φ165×1500mm; Packing quantity: 2 pieces/each Performance: The tent is a double slope frame structure. The front gable has one door, the back gable has one chimney, and the two side walls have one window. The ventilation effect is good. Easy erection and roll up. Application: It is mainly used for the army's accommodation and rest in the field.</p>	<p>Material: The tarpaulin material mainly used for is 300D 2 × 2 army outdoor digital camouflage silver oxford cloth. The material of inner ceiling is 1 × 1 white coated oxford cloth. The floor cloth material is 400g/㎡ double-sided PVC waterproof cloth. Shelter: φ25 × 1.5mm aluminum alloy pipe. Size: 2.5m long, 2.5m wide, 1.8m high side wall, 2.86m high top Packing quantity: 1 piece/each Performance: The erection and withdrawal can be completed within 5 minutes by 4 people, which is suitable for use in warm areas; It has good rain proof, mosquito proof and insect proof functions. The tent adopts a grid structure, and the tarpaulin and framework are assembled in one; The rods are made of aluminum alloy pipes, and the tarpaulin is made of light and thin new materials to achieve light weight and small volume; The erection and withdrawal are fast, simple in structure, convenient for carrying, and convenient for emergency mobile use. Equipped with floor covering, the living environment in the tent is comfortable. Air inter layer is set on the roof of combined grid tent to reduce radiant heat, and the severe baking feeling inside the tent is obviously weakened. A large area of ventilation gauze net shall be set up on the fence to ensure natural convection of air and a good thermal environment in the tent. Application: It is used by combat teams and professional units for marching, patrolling and field camping and operation during decentralized operations in wartime.</p>	<p>Material: Canopy: 28×2/2 Digital camouflage polyester waterproof canvas; Inner canopy: 150D white oxford cloth; The floor cloth material is 400g/㎡ double-sided PVC waterproof cloth; The floor mat is 500g/㎡ needled felt; Shelter: φ twenty-five × 1.5mm aluminum alloy pipe. Size: It is 2m long, 3m wide, 1.95m high at the top and 0.9m high at the side. Packing size: 1100×400×400mm; Packing quantity: 1 piece/each Performance: The square and space dimensions meet the basic functional requirements for emergency mobile temporary housing. The tent is equipped with floor cloth, cotton pad, ventilation hole at the mountain top, large open area of doors and windows, and yarn mesh, which has the functions of moisture-proof, dust-proof soil, mosquito and fly prevention, insect pest prevention, ventilation and sealing, and can better adapt to the use requirements in the south under humid and hot climate conditions. Deployment and roll up time: about 5 minutes/5 people can complete the erection or roll up. Application: It is used for camping accommodation of armored, artillery, air defense and other arms, ground troops, and other troops performing assault operations.</p>

4、 12 m ² pole type single layer tent	5、 Squad cold zone tent	6、 Squad cotton tent
		
<p>Material: The surface cloth adopts 28 × 2/28 × 2 Grass green polyester waterproof canvas. The support is made of plastic sprayed high-frequency welded steel pipe (material: Q215-Q235).</p> <p>Size: Length: 4m, width: 3m, side height: 1.6m, top height: 2.5m.</p> <p>Use area: 12 m²</p> <p>Package weight: 32kg</p> <p>Packing volume: 0.075m³</p> <p>Packing quantity: 2 pieces/each</p> <p>Number of habitable: 6 people</p>	<p>Material: Canopy 28 × 2/28 × 2 grass green polyester waterproof canvas; Lining: 150D white oxford cloth; Thermal insulation layer: 5mm thick needle felt on the roof; 3mm thick needle felt for mountain and enclosure.</p> <p>Shelter: 30 square meters × 1.5mm electric welded steel pipe, square 25 × 1.2mm electric welded steel pipe and 50 × twenty-five × 1.5mm electric welded steel pipe.</p> <p>Size: 3.9m long, 3.7m wide, 1.7m side height and 2.6m top height;</p> <p>Packing size: 800×600×450mm; 800×600×450mm; 2136×160×110mm; 1911×90×60mm ; 1700×140×120mm ; 1924×130×110mm ; 1821×130×130mm</p> <p>Packing quantity: 7 pieces/each</p> <p>Performance: The rated number of guests is 12. The use area is 14.43 m². The minimum clear height in the canopy is 1.7m, and the maximum clear height is 2.6m. The developed area is about 3.9m×3.7m. The erection time shall not exceed 15 minutes/6 people, and the withdrawal time shall not exceed 10 minutes/6 people. The front and back gable walls have one door and the wall has two windows. Fence windows are equipped with mesh, polyester glass window panels can be freely loaded and unloaded as required.</p> <p>Application: It is mainly used for accommodation of troops in cold areas under camping conditions, and also applicable to troops in southern areas.</p>	<p>Material: Face cloth 28 × 2/28 × 2 Polyester grass green waterproof canvas, Inner layer 13 × 1/13 × 1 plain flame retardant cloth, Thermal insulation layer synthetic fiber needle felt.</p> <p>Size: Length 4.4 m, width 4.6 m, side height 1.42 m, top height 2.6 m.</p> <p>Use area: 20.24 m²</p> <p>Package weight: 118kg</p> <p>Packing volume: 0.42m³</p> <p>Packing quantity: 3 pieces/each</p> <p>Number of habitable: 12 people</p> <p>Performance: 1. The tent is of double slope frame structure, 2. The structure is reasonable, safe and reliable, and can withstand the wind force of 8 levels, dead weight and snow load of 8 cm thick, 3. The tent is simple in structure and convenient for erection and withdrawal. 25min/6 people can be erected and 20min/6 people can be withdrawn</p> <p>Application: It is mainly used for accommodation and office work of troops in cold areas under field conditions</p>

7、 New type 10 people single layer tent	8、 10 people grass green single layer tent	9、 37 m ² folding grid tent
		
<p>Material: Outer canopy: 600D big flower PU coated with silicon silver oxford cloth; Inner canopy: 1 × 1 white silver coated cloth; Floor cloth: 500D gray double-sided PVC coated cloth; Shelter: φ28 × 1.5mm electric welded steel pipe φ25 × 1.2mm electric welded steel pipe.</p> <p>Size: Length: 4.6m, width: 4.6m, side height: 1.55m, top height: 3.1m.</p> <p>Packing size: 800×600×380mm; Φ150×1750mm</p> <p>Packing quantity: 2 pieces/each</p> <p>Performance: The use area is 21.16 m². The minimum clear height in the canopy is 1.4m, and the maximum clear height is 2.95m. The erection time shall not exceed 13 minutes/6 people, and the withdrawal time shall not exceed 15 minutes/6 people. The double-layer roof with ventilation layer is adopted, which has good heat insulation and fast heat dissipation in summer. The window wall area is relatively large, and the indoor ventilation and lighting are good. It is equipped with a cable-stayed window cover and a canopy type ventilation window cover, and the window functions of sunshade and rain shelter are matched. The outer roof joint is waterproof with glue, with excellent rain proof performance. It is equipped with moisture proof floor cloth, mosquito screen doors and windows, and has good habitability. The reasonable strut structure is adopted, which is convenient for erection and withdrawal, and safe and reliable for use.</p> <p>Application: The 2003-10/20 class single tent is a camping housing equipment, which is mainly applicable to the camping or office use of troops in the southern region.</p>	<p>Material: Canopy: 28 × 2/2 straw green polyester waterproof canvas, awning: φ38× 1.2mm electric welded steel pipe φ25 × 1.2mm electric welded steel pipe.</p> <p>Size: Length 4.8m, width 4.8m, side height 1.6m, top height 3.2m</p> <p>Packing size: 680×480×320mm; Φ120×1650mm;</p> <p>Packing quantity: 2 pieces/each</p> <p>Performance: Type 81 shift single tent is a pole type tent with a square bottom and a sharp top on four slopes. There is one door and two windows on the front and rear walls respectively, and the size of the door opening is 1500mm wide and 1600mm high. There is a skylight that can be opened and closed at will on the front and rear top slopes, and there are two windows on the walls on both sides. The canopy body is a whole, and it is firmly fixed on the ground by the combined action of a central column (two sections), ten fence columns, ten pull ropes, ten ground piles and tensioning. The four corners of the fence are connected with a sleeve trip. If necessary, the sleeve trip can be untied to lift the fence.</p> <p>Application: It is mainly used for the army's accommodation and rest in the field.</p>	<p>Material: Outer canopy: 220D digital camouflage coating polyester filament Oxford cloth; Inner canopy: 150D white coated polyester filament Oxford cloth; Floor cloth: ≥ 400g/ m² double-sided PVC waterproof cloth; Shelter: φ16 × 0.8mm aluminum alloy pipe φ20 × 1.5mm aluminum alloy pipe and polyamide 66, etc.</p> <p>Size: The outer frame is 11.8m long, 4.1m wide, 3.16m high, and the side wall is 1.54m high,</p> <p>The inner frame is 11.2m long, 3.5m wide, 2.66m high, and the side wall is 1.54m high.</p> <p>Packing size: 2000×800×1000mm;</p> <p>Packing quantity: 1 pieces/each</p> <p>Performance: The tent is a folding space grid structure, which can be used normally under 8 wind or 8 cm snow load; It is universal in the south and north, and can be erected and rolled up all day long; It can be combined into a multi-purpose tent group as required; Meet the needs of different users such as accommodation, office, command and medical treatment. The tent body is integrated, and the whole tent can be erected or withdrawn within 10 minutes.</p> <p>Application: It is mainly for the army to set up special tents for command posts and communication stations in the field.</p>

10、 70 m ² arch single layer tent	11、 108 m ² multipurpose tent	12、 10 people tropics zone tent
		
<p>Material: Tent surface cloth adopts 28 × 2/28 × 2 Desert camouflage polyester waterproof canvas, and the tent frame is 30 square × 1.5mm electric welded steel pipe, square 25 × 1.2mm electric welded steel pipe and 6.3 # channel steel, etc.</p> <p>Size: 10m long, 7m wide, 3.45m high to top</p> <p>Packing size: 800×600×500mm; 2040×150×150mm; 1970×160×140mm; 1300×φ260mm; 1900×85×70mm; 360×150×120mm;</p> <p>Packing quantity: 19 pieces/each</p> <p>Performance: 1. The tent fabric has excellent tear resistance, aging resistance, mildew resistance and rain resistance. The normal service life can reach more than three years.</p> <p>2. The tent is of arch frame structure, with simple structure and convenient erection. The erection can be completed for 12 persons within 25min, and the withdrawal can be completed for 12 persons within 15min.</p> <p>Application: It is mainly used by regiment level troops for command post or equipment repair under field conditions.</p>	<p>Material: Surface cloth: 28 X 2/28 X 2 Polyester waterproof canvas; Lining: 150D white oxford cloth; Floor cloth: ≥ 400g/m² grass green double-sided plastic coating; Heating duct: 1 X 1 white oxford cloth; Thermal insulation layer: 200g/m² synthetic fiber needle felt; Shelter: φ38 × 1.2mm electric welded steel pipe φ 44.5 × 2mm electric welded steel pipe.</p> <p>Size: Length: 11.25m, width: 9.6m, side height: 1.8m, top height: 4.1m</p> <p>Packing quantity:12 pieces/each</p> <p>Performance: The tent is a double slope frame structure, equipped with floor cloth, and the doors and windows are equipped with gauze mesh, which makes living comfortable. The glass window panels can be loaded and unloaded freely as required; The tent is equipped with thermal insulation layer, which is closed in winter and ventilated in summer, with good thermal insulation performance. It can bear the effects of dead weight, 80mm snow and Grade 9 wind load. The tent erection and withdrawal is convenient and fast, and can be completed within 1 hour/15 people. The special working rooms at the four corners of the awning are respectively formed by four separated hanging enclosures, which are convenient for suspension and removal. The tent has the extension function. If necessary, two tents can be connected together along the depth direction for use, and the use area can be doubled to meet the temporary special needs of some occasions. The overall tent is pulled up by pulling ropes and reinforced by triangular piles. It can accommodate 75 people for dinner or be used as a command post;</p> <p>Application: It is mainly used by the group army and division combat departments to set up command posts under field conditions.</p>	<p>Material: Surface cloth: 28 × 2/2 grass green polyester waterproof canvas;Lining: white yarn mesh;Support: plastic sprayed high-frequency welded steel pipe (material: Q215-Q235)</p> <p>Size: 4.8 m long, 4.8 m wide, 1.6 m side height, 3.2 m top height</p> <p>Use area: 23 m²</p> <p>Package weight: 56kg</p> <p>Packaging volume: 0.119m³</p> <p>Number of packages: 2 pieces/each</p> <p>Number of residents: 12 people</p>

13、 168 m ² arch single layer tent	14、 Police box	15、 6 people double-fly tent
		
<p>Material: Tent surface cloth adopts 28 × 2/28 × 2 Camouflage polyester waterproof canvas, with square 35 × 1.5mm electric welded steel pipe, square 30 × 1.5mm electric welded steel pipe, 8 # channel steel, 6.3 # channel steel, etc.</p> <p>Size: Length: 14m, width: 12m, top height: 5.6m;</p> <p>Packing size: 1000×700×650mm ; 750×500×500mm ; 2000×260×200mm ; 1970×110×110mm ; 1300×φ140mm; 1850×100×70mm; 1710×85×70mm ; 2100×250×250mm</p> <p>Packing quantity: 39 pieces/each</p> <p>Performance: 1. The tent fabric has excellent tear resistance, aging resistance, mildew resistance and rain resistance. The normal service life can reach more than three years. The tent is of arched frame structure.</p> <p>2. The tent is simple in structure and convenient for erection and removal. 45min/24 people can be erected and 30min/24 people can be withdrawn</p> <p>Application: It is mainly used for large-scale display activities or large-scale equipment repair in the field.</p>	<p>Material: The surface cloth adopts 28 × 2/2 floret camouflage polyester waterproof canvas awning adopts 30 × thirty × 1.2 Welded thin-walled square tube, 25 × twenty-five × 1.2 It is made by welding thin-walled steel pipes.</p> <p>Size: 1m long, 1m wide and 2.3m high</p> <p>Packing size: 600×400×350mm; 980×Φ230mm; 2080×170×120mm</p> <p>Packing quantity: 3 pieces/each</p> <p>Performance: The top of the sentry box (cotton) is a four sided frame structure. The enclosure is mainly composed of a door and three windows. The window is equipped with anti stretching window panes, and the upper opening of the enclosure is fixed with straps. The sentry box (cotton) surface cloth is made of digital camouflage polyester waterproof canvas, which has excellent tensile, tear resistance, aging resistance, rain resistance, etc; the awning frame 30 × 30 × 1.2 Welded thin-walled square tube, 25 × 25 × 1.2 Weld thin-walled square tubes. It has excellent wind resistance, is not suitable for deformation, and is sturdy and durable. Its normal service life can reach more than 3 years. The sentry box (cotton) is simple in structure and convenient for erection and removal. The erection can be completed for 10min/4people, and the withdrawal can be completed for 6min/4people.</p> <p>Application: It is mainly used for soldiers to stand guard and watch.</p>	<p>Material: The outer awning cloth adopts 28 × 2/28 × 2. Straw green polyester waterproof canvas, the inner tarpaulin is 150D white flame retardant oxford cloth. The main material of the support rod of the awning frame is ∅ 25mm × 1.2mm steel pipe is spliced.</p> <p>Size: Outer canopy: 4m long, 2.5m wide, 1.4m side height, 2.1m top height; Inner canopy: 4m long, 2.4m wide, 1.35m side height and 2.05m top height.</p> <p>Packing size: 500×400×300mm; 1570×Φ110mm.</p> <p>Packing quantity: 2 pieces/each</p> <p>Performance: A double fly tent for six people. The tent structure is double-layer, and the tent is a double slope pole structure. A door is opened on the front gable, two windows are opened on both sides of the wall, and the windows are equipped with gauze mesh. The tent is simple in structure and convenient for erection and withdrawal. 6 min/4 people can be erected and 6 min/4 people can be withdrawn.</p> <p>Application: It is mainly used for the army's accommodation and rest in the field.</p>

16、 72 m ² multipurpose tent	17、 20 people single layer pole tent	18、 Saddle type three-layer tent
		
<p>Material: Surface cloth: 600D camouflage polyester PU coated with white waterproof oxford cloth; Ceiling: 150D bleached polyester PU silver coated waterproof oxford cloth; Floor cloth: ≥ 400g/m² grass green double-sided plastic coating; Shelter: φ forty × 1.2mm electric welded steel pipe φ forty-five × 1.5mm electric welded steel pipe.</p> <p>Size: Length: 10m, width: 7.2m, side height: 1.95m, top height: 3.63m</p> <p>Packing size: 800×500×400mm ; 800×500×400mm ; φ170×3520mm ; φ170×3520mm ; φ170×1885mm ; φ170×1885mm ; φ170×1885mm ; φ170×1885mm ; φ170×1885mm; 824×614×532mm:</p> <p>Packing quantity:9 pieces/each</p> <p>Performance: The tent is a double slope straight wall frame structure. All the tent frames are plug-in structures, and the column bottom is surrounded by landing rods. It can safely work under the most unfavorable load combination of dead weight, 8cm snow and wind force of 8. The awning is equipped with a high reflective thermal insulation ceiling, a triangular ventilation window at the mountain top, large open area of doors and windows, and gauze mesh. There is no obvious baking feeling and overheating phenomenon in the awning in summer. When used together with 10kW cooling and heating fan, the thermal environment inside the canopy is comfortable.</p> <p>Application: It is matched with XCZ2002-300 self-propelled cooking truck and XCC2002-150 cooking trailer, and can be used for dining in the camping conditions of organic battalions, companies or equivalent catering units of the whole army.</p>	<p>Material: Surface cloth: 28 × 2/2 grass green polyester waterproof canvas.</p> <p>Support: plastic sprayed high-frequency welded steel pipe (Q215-Q235)</p> <p>Size: Length: 8m, width: 4.8m, side height: 1.6m, top height: 3.2m</p> <p>Packing quantity: pieces/each</p> <p>Use area: 38.4 m²</p> <p>Package weight: 75kg</p> <p>Number of residents: 16 people</p>	<p>Material: Outer tarpaulin: 600D light gray pvc cloth Medium tarpaulin: 10 × 10 Light grey cotton canvas Inner tarpaulin: 150D light grey oxford cloth</p> <p>Size: Length: 12.5 m, width: 5 m, side height: 1.7 m, top height: 2.5 m</p> <p>Use area: 62.5 m²</p> <p>Package weight: 441.2kg</p> <p>Packaging volume: 0.96m³</p> <p>Number of packages: 8 pieces/each</p> <p>Number of residents: 20 people</p> <p>Performance: The structure is reasonable and the erection is convenient. 30min/12persons can be erected and 20min/10 persons can be withdrawn</p> <p>Application: It is mainly used for outdoor accommodation, office work, tourism, etc</p>

19、 10×5 camouflage cotton tent	20、 12×9 corps command tent	21、 Three prevention tent
		
<p>Material: Face cloth 28 × 2/2 camouflage polyester waterproof canvas, 3mm needled felt for insulation layer, 150D white flame-retardant oxford cloth for inner tarpaulin</p> <p>Size: 10m×5 m×2 m×3.3m</p> <p>Package weight: 282.8kg</p> <p>Packaging volume: 1.29m³</p> <p>Number of packages: 6 piece/each</p> <p>Number of users: 50 people</p> <p>Use area: 50 m²</p> <p>Performance: 1. The tent is a double slope frame structure, with one door and one window on the front and rear gable walls, and five windows on each side of the wall.</p> <p>2. The tent is simple in structure and convenient for erection and removal. The erection can be completed for 12 persons within 20min, and the withdrawal can be completed for 12 persons within 15min.</p> <p>Application: It is mainly used for office and accommodation in the field</p>	<p>Material: Face cloth 28 × 2/28 × 2 Polyester camouflage waterproof canvas Lining 150D white oxford cloth Filled with 3mm thick needle felt High frequency welded steel pipe for tent frame</p> <p>Size: 12 m×9 m×2 m×3.91m</p> <p>Package weight: 852kg</p> <p>Packaging volume: 2.92m³</p> <p>Number of packages: 20 pieces/each</p> <p>Number of users: 60 people</p> <p>Packing quantity: pieces/each</p> <p>Performance: 1. The tent is of double slope frame structure.</p> <p>2. The tent is simple in structure and convenient for erection and removal. 25min/20 people can be erected and 10min/20 people can be withdrawn</p> <p>Application: It is mainly used by the army under field operation conditions</p>	<p>Material: Outer fabric:500D camouflage tent fabric, 内 Inner fabric: Anti-virus cloth (army green outside, white inside). Ground sheet: Laminated mesh PVC double-sided coated fabric PZ56</p> <p>Frame: Aluminum alloy tubes and aluminum alloy castings</p> <p>Size: Outer: L 8.8m, W 4.4m, wall height 1.93m, top height 2.615m; Inner: L 5.88m, W 4.2m, wall height2.15m, top height 1.86m; Frame: L 9.06m, W 4.5m, wall height1.95m, top height2.785m.</p> <p>Packing size: 4.92m×2.23m×2.34m</p> <p>Performance: Each side wall of the tent is provided with a wall tent body connection strip, two windows and four air pipe holes, The front and rear gables are provided with a window and a gable tent body connection strip; The top of the canopy is provided with four tent body lifting rope, for the tent body hanging. Side wall is provided with a buckle, for setting up the tent body.with There are aluminum ring around the ground sheet, used to fix the tent.</p>

22、 30 m ² inflatable command tent	23、 20 m ² Inflatable command tent	24、 Inflatable single layer tent
		
<p>Material: Outer tent : 2 × 2army green silver coated oxford ; Inner tent: 150Dwhite silver coated oxford; Air column: double side PVC coated fabric.</p> <p>Size: L 6m, W 5m, Side height 1.8m, Top height 2.97m;</p> <p>Weight: 164kg</p> <p>Packing size: 1200mm×900mm×725mm</p> <p>Packing numbers: 1 unit/ case</p> <p>Performance: There is an air layer between the inner and outer tent, which has good heat insulation and ventilation performance in summer and good heat insulation and sealing performance in winter. The front and back gables of the tent have one door each, and each side wall has three Windows, two air heater holes and two wire holes. The tent with ground sheet.</p> <p>Setup and take down: ≤5min/4~6 人; In normal condition the air column support time not less than seven days</p> <p>Application: It is mainly used for troops to set up command posts or temporary camps in the field. It can be used for the southern and northern areas of the army camp, can be used for 6 ~ 8 people.</p>	<p>Material: Outer tent: 2×2 camouflage silver coated oxford, Inner tent: 1 × 1 white silver coated oxford. Air column: 1000D double side PVC coated fabric.</p> <p>Size: L 4.4m, W4.6m, Side Height1.8m, Top height2.97m</p> <p>Weight: 135 kg</p> <p>Packing size: 1290×950×750mm</p> <p>Packing numbers: 1 unit/ case</p> <p>Performance: The tent is equipped with an air column and an inner and outer tent。 The outer tent and the air column are fixed together, the inner tent and the air column are connected by hanging, after hanging, the inner tent is flat, the inner tent with silver white color, so that the interior appears bright, ventilation effect is better, and the inner tent not only increases the thermal insulation performance of the product, but also strengthens the protection of the air column part, avoids unnecessary scratches, and improves the overall aesthetic comfort of the product The tent is assembled as a whole structure, which can be set up and put into use within 5 minutes</p> <p>Application: This product is flexible in operation and easy to use. It is a camping equipment for the troops to carry out exercises, training, emergency rescue and other non-war military operations and wartime command.</p>	<p>Material: Outer tent:133dtex × f24 High strength polyester filament camouflage coated fabric ; Inner tent: 150Dwhite silver coated oxford ; Air column: grey double side PVC coated fabric.</p> <p>Size: L 2m, W 2m, H 1.5m</p> <p>Packing size: 1100mm×220mm×220mm。</p> <p>Packing numbers: 1 unit/ case</p> <p>Performance: Inflatable single tent can meet the requirements of 2 people camping tents as integral inflatable frame structure, short inflatable time, can meet the requirements of quick erection and removal of single tent. Electric inflatable time: 2min; Foot inflating time: 5min, The tent can be inflatable, also can pump air, electric pumping time: 3min; Foot pumping time 8min. The height of the tent bottom air column is 160mm. After the tent is setting up, it is equipped with the ground sheet to prevent water, and the waterproof height is 160mm</p> <p>Application: It is mainly used for troops training, accommodation, office and emergency rescue in the field.</p>

25、 Camping tent	26、 Field sleeping bag	27、 Envelope sleeping bag
		
<p>Material: Fabric: 290T camouflage plaids , 210D olive green coated PU oxford is used as the ground cloth, and the diameter of the support rod is 8mm aluminum alloy support rod. The joints are connected with rubber ropes, with plugs at both ends; Air cushion surface cloth: 190T digital camouflage PVC taffeta; Hammock material: 240T olive green waterproof and anti-static grid cloth, packing case surface cloth: 600D × 600DPVC digital camouflage oxford cloth, packing case lining: 150D digital camouflage PU oxford cloth</p> <p>Size: The tent is 1.9m long, 1.9m wide and 1.35m high; The air cushion is 1.9m long, 0.62m wide and 0.25m high; Hammock 1.75m long × 1.48m wide</p> <p>Packing size: 1400×480×370mm</p> <p>Packing quantity: 5 pieces/each</p> <p>Performance: The bottom of the tent is square, and the upper part is arched. It is equipped with three screen windows and one screen door. The four sides of the roof are equipped with triangular screen windows, and the roof is equipped with rain curtains. The tent is crossed diagonally through the tent pole sleeve by two supporting rods and supported at the same time. The two ends of the supporting rods are fixed in the aluminum tent ring at the four corners of the tent and fixed with hook piles, so that the tent is in a four slope arch structure. Ventilation and convection can be provided at the window door to ensure the indoor brightness; There is a curtain at the door of the window, which is highly airtight. With screen window and screen door, it can prevent mosquitoes. Floor cloth is provided to keep the interior clean. The air cushion has good softness and resilience, and is comfortable to use. The hammock can be hung on trees, which is convenient and comfortable to use</p> <p>Application: It is mainly used for tourism, accommodation, entertainment, etc. under outdoor conditions. This tent can be used by two people in the wild, and four people can play in it. The air cushion can be used alone or together with the tent. It is mainly used to replace planking and folding bed to provide emergency support in the field under camping conditions.</p>	<p>Material: 240T (anti-static) olive green plaid cloth is used as the surface cloth, 230T (anti-static) olive green nylon fabric is used as the lining, and 25tex is used as the lining × 28tex grass green cotton plain cloth, filled with 70% down and 30% feather insulation layer.</p> <p>Size: Bag length 1950mm, bag width 800mm, cap height 350mm</p> <p>Packing size: 570×530×470mm</p> <p>Packing quantity: 4 pieces/each</p> <p>Performance: 1. The field sleeping bag (model 05) is deployable, which has the advantages of strong warmth retention, portability and durability. You can take it apart and wash it. The head of the sleeping bag can be tightened to prevent cold wind from blowing in. Quilting lines are arranged between the surfaces to prevent the movement of down in the space of the thermal layer of the sleeping bag to the maximum extent and ensure the uniform distribution of down.</p> <p>2. The opening and closing of the sleeping bag are adjusted through the nylon zipper, and the zipper is opened to unfold the sleeping bag, which can be used as a down quilt and mattress.</p> <p>Application: 05 Field sleeping bag is a kind of sleeping bag for individual soldiers during field training and rest in special areas. It can form a field sleeping bag system together with tarpaulin and field sleeping pad.</p>	<p>Material: The fabric is 210D summer camouflage cloth, and the lining is 190T olive green nylon.</p> <p>Size: Bag length 1900 mm, bag width 750mm</p> <p>Packing size: 1200×470×540mm</p> <p>Packing quantity: 10 pieces/each</p> <p>Performance: 1. The envelope type sleeping bag can be unfolded, and has the advantages of simple structure, strong warmth retention, portability and durability. Quilting lines are arranged between the surfaces, which can prevent the movement of fluffy cotton in the space of the sleeping bag's warm layer to the greatest extent.</p> <p>2. The opening and closing of the sleeping bag are adjusted through the nylon zipper, and the zipper is opened to unfold the sleeping bag for use as a quilt and mattress</p> <p>Application: Envelope sleeping bag is a kind of sleeping bag for individual soldiers during field training and rest in special areas. It can form a field sleeping bag system together with tents and field sleeping pads.</p>

28、 Aluminum camp bed	29、 Field operation desk	30、 2m ³ Soft water storage tank
		
<p>Material: surface cloth 666dtex × 666dtex olive green PVC coated cloth; Bed frame: 6063, square 25mm × 1.2mm aluminum alloy pipe; 6063, 26mm × 35mm × 1.1 Single arc aluminum alloy pipe.</p> <p>Size: 1960mm×660mm×440mm</p> <p>Packing size: 1000mm×440mm×280mm</p> <p>Packing quantity:4 pieces/each</p> <p>Product composition: bed surface and folding bed frame.</p> <p>Total mass: 25.5 kg/box</p> <p>Performance: Foldable bed frame. The utility model can be unfolded when in use, and can be folded and stored when not in use, which saves space, is small in size, and is convenient to carry.</p> <p>Application: For soldiers to rest during field operations</p>	<p>Specifications: length 1100mm ± 3mm, width 550mm ± 3mm, height 750mm ± 5mm.</p> <p>Folding size: length 1100mm ± 3mm, width 550mm ± 3mm, height 70mm ± 3mm.</p> <p>Total mass: 10kg ± 0.4kg.</p> <p>Operation ability: provide camping support for personnel to eat and work under camping conditions. Each folding table is for 1-4 people.</p> <p>Exhibition time: no more than 1min/1 person.</p> <p>Environmental adaptability: use environment temperature: - 41 °C~46 °C, relative humidity: ≥ 95%, storage limit temperature: - 55 °C, 70 °C, relative humidity: ≥ 95%, service life not less than 6 years, storage life not less than 10 years.</p> <p>Reliability: the average failure free deployment times are more than 500, and there is no irrecoverable deformation when 3000 N/ m² uniformly distributed load is applied to the desktop vertically.</p> <p>Transportability: meet relevant requirements of General Outline for Packaging, Handling, Storage and Transportation of Military Equipment (GJB1181-1991). It can be transported by vehicle, rail, water and air to meet the requirements of conventional transportation mode of the army.</p>	<p>Package size: 0.5 in length, 0.4 in width and 0.33 in height,</p> <p>Rated water capacity: 2m3</p> <p>Hygienic property of water storage: non-toxic, tasteless and non polluting</p> <p>Operating ambient temperature: 0 °C~40 °C</p> <p>Storage ambient temperature: - 40 °C~70 °C</p> <p>Appearance: camouflage (anti infrared detection)</p> <p>Overall dimension (diameter × Bottom diameter × High): Φ1400mm ×Φ 1920mm × 900mm</p> <p>Number of packages: one can/box</p> <p>2m3 empty tank mass: 7kg</p> <p>Purpose: 2m3 soft water storage tank is a foldable soft water storage container, which is suitable for camping or without fixed water storage facilities. It is a kind of finalized water supply equipment to ensure the domestic water of our army.</p>

31、 Air pillow type self-inflatable mattress	32、 Mattress	33、 Folding self inflating mattress
		
<p>Material: 150D low elastic PVC camouflage oxford cloth; Filler: 30mm thick polyurethane sponge;</p> <p>Lining Fabric: After inflation, it is 1.85m long, 0.68m wide and 0.03m thick;</p> <p>Product weight: 1.7kg/piece;</p> <p>Total mass: 21kg/box</p> <p>Packing size: 500×650×700mm</p> <p>Packing quantity: 12 pieces/each</p> <p>Performance: The fabric of the air pillow type automatic inflatable mattress is camouflage oxford cloth, which is coated with PVC on one side, with camouflage, wear resistance and other properties; The filler is made of 30mm thick polyurethane sponge, which is not only comfortable and soft, but also has good moisture-proof and cool insulation performance; One end of the mattress is designed with two straps, which is convenient for mattress storage and carrying.</p> <p>Application: The air pillow type self inflating mattress has the integrated design of air pillow and mattress, and has the functions of comfort and moisture resistance. It can be used alone or with folding beds and tents, mainly for camping in the wild.</p>	<p>Material: The mattress material is 07 type digital camouflage polyester TPU single-sided coating cloth, and the filler material is soft polyurethane (PU) foam.</p> <p>Size: 1.9m long, 0.75m wide and 0.04m high</p> <p>Product composition: mattress consists of fabric, base material, filler and accessories,</p> <p>Product weight: 2kg/piece;</p> <p>Total mass: 13.5kg/box;</p> <p>Total volume: 0.34m³</p> <p>Package size: 800 × 550 × 770mm</p> <p>Packing quantity: 6 pieces/each</p> <p>Performance: The cloth base material is tough, and the surface coating is firmly bonded, which can well meet the stress requirements, and it is easy to carry and durable.</p> <p>Application: The mattress has comfortable and moisture-proof functions. It can be used alone or in combination with tents. It is mainly used to replace planking and folding beds to provide emergency support under camping conditions</p>	<p>Material: 190T digital camouflage PVC taffeta; Filler: 25mm thick elastic sponge;</p> <p>Size: After inflation, it is 1.9m long, 0.62m wide and 0.025m thick</p> <p>Product weight: 1.24kg/piece.</p> <p>Total mass: 28kg/box</p> <p>Packing size: 850×360×700mm</p> <p>Packing quantity: 20 pieces/each</p> <p>Performance: The fabric of the folding automatic inflatable mattress is camouflage taffeta, which is coated with PVC on one side, and has the properties of camouflage, portability, etc; The filler is made of 25mm thick polyurethane sponge, which is not only comfortable and soft, but also has good moisture-proof and cool insulation performance; One end of the mattress is designed with two straps, which is convenient for mattress storage and carrying.</p> <p>Application: The foldable self inflating mattress is designed in an integrated way, with comfortable and moisture-proof functions. It can be used alone or in combination with 1029D tent and folding bed, mainly for camping in the field.</p>

34、 Inflatable mattress (Ministry of Public Security)	35、 Sleeping mat
	
<p>Material: The top cloth and bottom cloth are 150D dark blue polyester thermoplastic polyurethane (TPU) coated cloth, and the filler is 55mm thick soft polyurethane foam.</p> <p>Size: 1850mm long, 750mm wide, 55mm thick</p> <p>Packing size: 700mm×650mm×770mm</p> <p>Performance: 1. Inflatable mattress is formed by heat sealing process, which is mainly composed of surface, bottom material, filler, air stop valve and accessories. The product has simple structure, can realize self inflation, and is soft and comfortable.</p> <p>2. Inflatable mattress has built-in soft polyurethane (PU) foam, with thickness of 55mm and density of 21kg/m³, The color is white, and the use of inflatable mattress is moderate in hardness and softness. When one person weighs 80kg and sleeps normally, the inflatable mattress is still elastic and the compression thickness is not more than 50%; The self inflation structure of the inflatable mattress is realized through the expansion of foam, and the compression of foam is convenient for the storage and carrying of the inflatable mattress.</p> <p>3. The inflatable mattress is equipped with pillows to improve the comfort of use, effectively relieve fatigue, and the design conforms to ergonomics.</p> <p>4. Three tie straps are set at the lower side of the inflatable mattress. The tie straps are dark blue nylon webbing, which are riveted at the edge of the inflatable mattress through two snap fasteners. Plastic buckles are set at both ends of the tie straps to facilitate the storage and carrying of the inflatable mattress.</p> <p>5. The pillow has an independent air inflation and deflation nozzle. The air can be blown into the pillow when the lower part of the air nozzle is pinched. The height of the pillow can be determined freely according to the amount of inflation. When deflating, the lower part of the air nozzle is also pinched, which is simple and convenient.</p> <p>Application: It mainly provides emergency support for replacing planking and folding beds under camping conditions.</p>	<p>Material: 167dtex × 48f polyether polyurethane polyester oxford cloth</p> <p>Size: Expand 1850mm X 600mm, the middle sponge is 30mm high, the air column on both sides is 60mm high, and the pillow is 98mm high. Roll up size Φ200 X 180mm.</p> <p>Product composition: the sleeping pad is composed of the sleeping pad body, the inflation device and the repair accessories.</p> <p>Product weight: 1.1kg/piece.</p> <p>Packaging: Each mattress shall be stacked and put into an inflating device, and every 6 pieces shall be put into a carton.</p> <p>Total mass: 8.6 kg</p> <p>Total volume: 0.053m³</p> <p>Packing size: 600mm×400mm×220mm</p> <p>Packing quantity: 6 pieces/each</p> <p>Performance: 1. The sleeping pad is an integrated structure, which is easy to spread.</p> <p>2. The sleeping pad is small in size, light in weight, easy to carry, and single package size Φ 200mm X 180mm.</p> <p>3. The sleeping pad combines the advantages of the inflatable sleeping pad and the self inflatable sleeping pad. The middle part is equipped with a sponge, and the two sides are equipped with tubular air columns. The sleeping pad is more durable. When the surface cloth of the sleeping pad is damaged, the lining of a high elastic sponge can ensure the basic performance of the sleeping pad, and it still has moisture-proof and heat insulation properties. This structure can also meet the portability of individual soldiers</p> <p>Application: The sleeping pad is used to meet the requirements of thermal insulation for individual soldiers camping. It can be used with individual tents and sleeping bags. It can effectively prevent moisture and heat during camping.</p>

36、 MC camouflage military uniform	37、 20kw air heater	38、 40kw air heater
		
<p>Material: material: nylon/cotton 50/50 MC camouflage plaid fabric</p> <p>Size: L</p> <p>Product composition: training jacket, training pants</p>	<p>Material: Q235 t1.0mm, Q235 t2.0mm, Q235 t1.2mm cold-roll steel sheets.</p> <p>Size: L 1.22m, W 0.48m, H 0.55m.</p> <p>Weight: 135 kg/ unit</p> <p>Packing size: 1420×750×1050mm</p> <p>Packing size: 1 unit / case.</p> <p>Performance : Heating capacity: 20kW. Fuel: light diesel or kerosene.</p> <p>Maximum fuel consumption: 2.0kg/h; Air output : 990-1480m³ /h(low 990m³/h , mid 1280m³/h , high1480m³/h); Air temperature : < 90℃ ; Exhaust gas temperature:<250℃ 。 Thermal efficiency: >85%。 Running noises: <60dB(A); Application Environment: temperature: -40~+40℃ ; altitude: <2000m。</p> <p>Power: Monophase current 220V/50Hz、 0.32KW。</p> <p>Application : It is mainly used for heating when camping in tents or fixed barracks by the command organs of the troops, field hospitals, emergency communications and maintenance departments in the plain areas. In addition to heating, can also be used for ventilation.</p>	<p>Material: δ1.0mm, δ2.0mm, δ1.0mm cold-roll steel sheets.</p> <p>Size: L 1.4m× W 0.812m× H 0.953m</p> <p>Component: Hot air outlet, shell, oil supply system, burner, combustion heat exchanger, control system, blower, chimney, wheels, legs, etc</p> <p>Weight: 276 kg</p> <p>Packing size: L 1520mm× W930mm× H1270mm。</p> <p>Packing size: 1unit / case</p> <p>Performance: Heating capacity: 40kW</p> <p>Fuel: light diesel or kerosene.</p> <p>Maximum fuel consumption: 4.0kg/h</p> <p>Air output: I 1700m³/h、 II 1950m³/h、 III 2200m³/h; Air temperature: <90℃ ; Thermal efficiency: >85%</p> <p>Running noises: <72dB (A)</p> <p>Application : It is mainly used for heating when camping in tents or fixed barracks by the command organs of the troops, field hospitals, emergency communications and maintenance departments in the plain areas. In addition to heating, can also be used for ventilation.</p>

<p>39、 Air heater</p>	<p>40、 10KW cooling and heating fan/heater</p>	<p>41、 Plateau air heater</p>
		
<p>Material: δ 1.0mm cold-rolled steel plate δ 2.0mm cold-rolled steel sheet and δ 1.0mm stainless steel plate, etc</p> <p>Size: long 1762mm,width 784mm,height 970mm</p> <p>Product composition: The air heater is composed of hot air outlet, shell, oil supply system, burner, combustion heat exchanger, control system, blower, chimney, wheel, leg, etc</p> <p>Total weight: 189kg</p> <p>Total mass: 1 set/box.</p> <p>Performance: The maximum air supply temperature of the heater is set at 108 ℃ when leaving the factory. Press the "Air Temperature Setting" button as required to increase it from 95 ℃ to 110 ℃. Air supply volume: 1000 ~ 3800m³/h (frequency conversion automatic regulation); Air supply temperature: about 85 ℃</p> <p>Application: The 2002-40 plateau air heater is mainly used by the commanding organ, field hospital, confidential communication, maintenance and other departments of the troops in the plateau area for heating during camping and living in the tent. It can also be used in fixed barracks. In addition to heating, it can also be used for ventilation.</p>	<p>Material: The shell mainly adopts LF2 δ 1.0mm、 δ 1.5mm、 δ 2.0mm、 δ 3.0mm equal aluminum alloy plate.</p> <p>Product size: long 1.39m, width 1m, height 0.902m</p> <p>Packing size: long 1.94m, width 1.14m, height 1.075m</p> <p>Total weight: 300kg。</p> <p>Total volume: 2.38m³</p> <p>Packing quantity: 1 piece/set</p> <p>Performance: The panel of 10kW air cooler and heater shall be easy to remove and install, the filter screen shall be easy to replace and clean, the overall appearance shall be neat and clean, and the frame and shell shall not be deformed; The air duct is a compressible flexible pipe, which is convenient for transportation, storage and use, and has certain heat insulation, noise reduction and flame retardant effects.</p> <p>Application: The 10 kilowatt cooling and heating fan is mainly used for the army in the Yangtze River basin and the area south of it, and mainly provides support for regimental command posts, field hospitals, confidential communications and other departments; It can be used for heating in winter and cooling in summer, and it can be used with tents of about 30 m².</p>	<p>Material: The shell mainly adopts LF2 δ 1.0mm、 δ 1.5mm、 δ 2.0mm、 δ 3.0mm equal aluminum alloy plate</p> <p>Size: 1.315m long, 0.668m wide and 0.745m high Total weight: 118kg</p> <p>Packing quantity: 1piece/set</p> <p>Performance: 1. The running power consumption of the heater is 1.5kW, single-phase 220V/50Hz.</p> <p>2. Rated heating capacity: 20kW (4500m above sea level)</p> <p>3. Fuel: light diesel or kerosene</p> <p>4. Fuel consumption: 2.0kg/h (4500m above sea level)</p> <p>5. Air supply volume: 800 ~ 1800m³/h (frequency conversion automatic regulation)</p> <p>6. Air supply temperature: about 85 ℃</p> <p>7. Thermal efficiency:>85%</p> <p>8. Operating noise:<65dB (A)Application: From 2002 to 20, the plateau air heater is mainly used by the commanding organ, field hospital, confidential communication, maintenance and other departments of the troops in the plateau area for heating during camping. It can also be used in fixed barracks. In addition to heating, it can also be used for ventilation.</p>

42、 20kw air heater	43、 Plateau shift heating furnace	44、 Diesel coal dual purpose heating furnace
		
<p>Size: Unit size: $\leq 800\text{mm long} \times 600\text{mm wide} \times$ The height is 800mm ($\pm 50\text{mm}$), the outer diameter of the air duct is $\leq 350\text{mm}$, and the straightening length is about 5m. The whole air duct is flexible, and each pipe is equipped with a 300mm outer diameter connector and a buckle. The whole machine is equipped with 07 armed police summer camouflage cover, and the air duct is equipped with camouflage (standard color) bag.</p> <p>Product composition: The air heater consists of hot air outlet, shell, oil supply system, burner, combustion heat exchanger, control system, blower, chimney, wheel and leg, etc.</p> <p>Product weight: Product weight $\leq 70\text{kg}$</p> <p>Total weight: Total weight $\leq 90\text{kg}$</p> <p>Packing quantity: 1 piece/set</p> <p>Performance: Automatically adapt to the altitude range of - 50 meters -- 5000 meters; Hot air displacement $\geq 900\text{m}^3 / \text{H}$ (bare machine without air duct); Ignition time $\leq 3\text{min}$ (after the heater is powered on for operation); Starting power consumption $\leq 1000\text{W}$.</p> <p>Application: It is used by the armed police force for heating.</p>	<p>Material: Cold rolled steel sheet.</p> <p>Size: Furnace body size (length \times wide \times High): 720mm\times420mm\times585mm</p> <p>Product composition: The heating furnace for plateau shift consists of a heating furnace, a chimney and a packing box, and is equipped with four operating tools, such as fire hook, fire shovel, fire tongs and poke bar</p> <p>Product weight: 50Kg</p> <p>Packing size (long\timeswidth\timesheight): 0.8m\times0.585m\times0.655m.</p> <p>Packing quantity: 1 piece/set.</p> <p>Performance: (1) Heating capacity: 10kw; (2) fuel consumption: 2kg/h (Standard coal); (3) Thermal efficiency: about 70% (4) Fuel type: coal, firewood, dry animal dung (cow dung, sheep dung) and other solid fuels.</p> <p>Application: The plateau shift heating furnace (hereinafter referred to as the heating furnace) is mainly used for heating tents of about 30 m^2 in winter on the plateau, or in fixed houses without heating equipment and facilities under the plateau environment.</p>	<p>Material: Galvanized steel sheet</p> <p>Size: The length of furnace table is 650mm, the width of furnace table is 400mm, and the height of furnace is 610mm</p> <p>Product composition: The dual-use heating furnace for firewood and coal is a cuboid style, one end face is equipped with a firewood adding port and a furnace ash port, the side face is equipped with an oven and a vent, the furnace is equipped with a dual-use furnace core and a furnace grate, and the kitchen top is equipped with two stoves. The accessories of the stove are composed of stove mouth cover, smoke pipe, fire hook, fire tongs, poke bar and stove cover.</p> <p>Packing size : 0.66m\times0.410m\times0.64m</p> <p>Packing quantity: 1 piece/box</p> <p>Application: It is mainly used for heating the tents and mobile houses of the disaster victims, and also can be used for heating the houses without central heating facilities. The stove can also boil water and cook food while heating</p>

<p>45、 Multi fuel heating furnace</p>	<p>46、 Coal wood heating stove</p>	
		
<p>Material: 304 Stainless steel plate</p> <p>Size: (L×W×H): 0.8m×0.59m×0.595m</p> <p>Product composition: It is mainly composed of furnace body, chimney and ash hopper combustion module, packed in crates, and equipped with oil pocket and oil pocket support inside.</p> <p>Total weight: Total package mass: ≤ 90kg (including heating furnace box group mass ≤ 75kg, thermoelectric fan box group mass ≤ 15kg).</p> <p>Total volume: 0.28m³</p> <p>Packing quantity: 1 piece/set</p> <p>Performance: Deployment and roll up time: ≤ 10min/2 persons</p> <p>Application: It is mainly used for heating.</p>	<p>Material: Q195 ~ Q235 δ 1mm cold rolled steel sheet, Q195 ~ Q235 δ 1.5mm cold rolled steel sheet, Q195 ~ Q235 δ 2.5mm cold rolled steel sheet, refractory cast iron, refractory brick and gray cast iron, etc</p> <p>Size: (L×W×H): 0.52m×0.32m×0.53m</p> <p>Product composition: It is composed of heating furnace, smoke pipe, elbow, T-head, tongs, fire hook, fire shovel, poke bar, etc.</p> <p>Packing size : (L×W×H): 540mm×330mm×560mm</p> <p>Packing quantity: 1 piece/set</p> <p>Performance: 1、 heat supply: 6 ~ 8kw 2、 fuel consumption: coal 1.5 ~ 2.0kg/h; Wood 3 ~ 4kg/h 3、 Thermal efficiency: about 70% coal 4、 exhaust temperature: 150℃ ~ 180℃ 5、 installation and removal time: 10min/2 people</p> <p>Application : It is mainly used for soldiers winter camping tents, mobile homes and other heating, can also be used for housing heating without central heating facilities, the furnace can heat water, cooking at the same time.</p>	

**DISASTER RELIEF SUPPLIES/
RED CROSS SUPPLIES**



1、 8 m ² single layer tent	2、 12 m ² single layer tent (2010)	3、 12 m ² cotton tent (2010)
		
<p>Material: Fabric: 333dtex×333dtex blue polyester PVC coated fabric, Frame: Ø22mm×1mm、 Ø19mm×1mm welding steel tube。</p> <p>Size: L 3.02m, W 2.6m, Wall height 1.52m, Top height 2.27m</p> <p>Packing quantity: 2 packages / unit</p> <p>Performance: The tent is a double-slope straight gable wall, with a triangular window in the rear gable and a door with screen in the front gable. The window, screen door and curtain are pulled and closed by the convenient 8" zipper. The tent frame is a plug-type frame structure, and all around the bottom of the column are provided with a landing bar. It can be used safely under dead weight and force 8 wind.</p> <p>Application : Mainly for plain areas, resettlement victims. It can accommodate about 3-5 people for temporary living.</p>	<p>Material: Outer tent:300D sky blue polyester PVC coated cloth. Tent frame:φ25x1mm, φ28x1mm welded steel tube.</p> <p>Size: L 3.7m, W 3.2m, Wall height 1.75m, Top height 2.67m:</p> <p>Packing quantity: 2 packages / unit</p> <p>Performance: 1. The tent is a rectangular double-slope straight gable wall structure, with one window on each gable wall, there is a screen door in one gable wall. There is a window in the gable at the other gable, and two windows on each side of the wall. There is a white window screen and sky blue polyester window bands</p> <p>2 Tent gable, side wall and roof of the tent are connected as a whole, the corner is connected by zipper and buckle, the side wall can be put up as the awning, the whole tent is fastened by pulling rope with triangular pile reinforcement.</p> <p>3.The frame is a plug-type structure with ground rods. It can be used safely in dead weight and force 8 wind.</p> <p>4. Simple structure, easy to assembling and disassembling. Assembly and disassembly time:15minutes for 6 people.</p> <p>Application: Mainly for plain areas, resettlement victims. It can accommodate about 5 people for temporary living.</p>	<p>Material: Outer tent:600D sky blue polyester PVC coated cloth. Insulation layer:400g/m² white polyester needled felt.</p> <p>Tent frame:φ25x1mm, φ28x1mm welded steel tube.</p> <p>Size: L 3.7m, W 3.2m, Wall height 1.75m, Top height 2.67m</p> <p>Performance: 1. The tent is a rectangular double-slope straight gable wall structure, there is screen door in one gable wall, air scoop above the door,same position on the other gable side is a and two windows on each side of the wall. The frame is a plug-type structure with ground rods. It can be used safely in dead weight and force 8 wind. Simple structure, easy to assembling and disassembling. setup and take down time:15minutes for 6 people. Tent cover cloth and cotton liner are assembled separately, can as single tent or cotton tent based on requirements.</p> <p>Application: Mainly for plain areas, resettlement victims. It can accommodate about 5 people for temporary living.</p>

4、 12 m ² single layer tent (new standard)	5、 12 m ² cotton tent (new standard)	6、 20 m ² single layer tent
		
<p>Material: Fabric:333dtex * 333dtex polyester PU coating. Tent frame: 6005 T6 ϕ25x1.2mm aluminum alloy tube, 6005 T6 ϕ28x1mm, general parts: Q215 ϕ28mmx1mm welded steel tube.</p> <p>Size: L 3.7m, W 3.2m, Wall height 1.75m, Top height 2.67m</p> <p>Packing quantity: 1830mmx300mmx240mm。</p> <p>Performance: 12 m² disaster relief single tent rectangular double slope straight gable wall structure. The door is on one side of the gable, with a triangular window above the door; A square window on the other gable and a triangular window above the winder; Two square windows on each side of the wall, with a removable screens. The whole tent is fixed by triangular pile through pulling rope, which is composed of three parts: tent body, screens, frame and accessories (including triangular pile, pulling rope and packaging bag). Integrated packaging of tent body and frame.</p> <p>Application: Mainly for plain areas, resettlement victims. It can accommodate about 3-5 people for temporary living.</p>	<p>Material : Fabric:333dtex * 333dtex polyester yarns PU coating cloth. Insulation layer:300g/m² hollow polyester fiber. Tent frame: 6005 T6 ϕ25x1.2mm aluminum alloy tube, Q215 ϕ28mmx1mm welded steel tube.</p> <p>Size: L 3.7m, W 3.2m, Wall height 1.75m, Top height 2.67m</p> <p>Packing quantity: 1 package / unit</p> <p>Packing size: 1830mmx430mmx430mm。</p> <p>Performance : Tent with rectangular double slope straight gable wall structure. The door is on one side of the gable, air vents above the door, chimney on the same position of the other gable wall. two windows on both sides of the wall. The whole tent is fixed by pulling rope connected to the triangle pile. The rod and the tent body shall be packed together, the rod shall be placed at the bottom of the sub-package bag, and the tent body and ground shall be folded and placed on the rod package to be placed in the sub-package bag. The size of the sub-package bag shall be 1810mmx350mmx210mm(length x width x height).</p> <p>Application : Mainly for plain areas, resettlement victims. It can accommodate about 5 people for temporary living.</p>	<p>Material: Fabric:666dtex * 666dtex sky-blue polyester PU oxford cloth. Tent frame: Q215 ϕ25x1.2mm, Q215 ϕ30mmx1.8mm welded steel tube。</p> <p>Size: L 5.92m, W 3.38m, Wall height 1.75m, Top height 2.78m</p> <p>Packing quantity: 2 packages / unit</p> <p>Performance: The door is located in the center of the front gable. There is a gauze door inside the door and a curtain outside the door. There is a triangular window above the front gable and the rear gable. The triangular window is a gauze window with triangular cloth curtains outside. There are three windows and two cable holes on each side of the wall, and one window in the the other gable. All the windows are window screens, with cloth curtains outside. The combination of gable wall and side wall is side wall cover gable extension side structure, connected with zipper and brocade silk buckle belt; The combination of the tent body and the frame is fixed with a strapping belt and a movable three-section ring tightening belt; Fixed to the ground by connecting triangular piles with pull ropes. The frame is composed of rods, tee joint and steel wire ropes. The rod is inserted with the tee joint, and locked by the spring clip at the head of the rod and the hole at the tee joint.</p> <p>Application: Mainly for plain areas, resettlement victims. It can accommodate about 8 people for temporary living. Can be used safety under dead weight and force 8 wind, Continuous service life more than 1 year.</p>

7、 20 m ² cotton tent	8、 36 m ² single layer tent	9、 36 m ² cotton tent
		
<p>Material: Fabric:1111dtex * 1111dtex sky-blue PU coating. Insulation layer:600g/m² white hollow polyester fiber. Tent frame: Q215 φ42mmx1.5mm, Q215 φ38mmx1.2mm welded steel tube Size: L 5.6m, W 3.63m, Wall height 1.70m, Top height 2.51m; Packing quantity: 4 packages / unit Performance: Gable roof with straight gable wall. The side walls can be raised as a sunroof. Tent frame is plug-type frame structure, all around the bottom of the column is provided with ground rods and can be used safely under dead weight and force 8 wind load. Continuous service life more than one year. Tent cover cloth and cotton liner are setup separately, can as single tent or cotton tent based on requirements. Application : For disaster command, post-disaster emergency medical treatment, temporary school quarters, storage of disaster relief materials and personnel accommodation, etc</p>	<p>Material: Fabric:600D sky-blue PU coating . Tent frame: φ38mmx1.2mm welded steel tube。 Size: L 7.86m, W 4.76m, Wall height 3.1m, Top height 1.75m Packing quantity: 5packages / unit Performance: Gable roof with straight gable wall. One door on each of the gable wall, a triangle window above the door, in the upper left side of the gable door is equipped with a air vent, the upper left side of the door on the other gable is equipped with a chimney; There are three windows on each side of the wall. The side wall can be propped as awnings. Tent frame is plug-type frame structure, all around the bottom of the column is equipped with a landing rod. It can be used safely under dead weight and force 8 wind load. Application : For disaster command, post-disaster emergency medical treatment, temporary school quarters, storage of disaster relief materials and personnel accommodation, etc.</p>	<p>Material : Fabric:600D sky-blue single side coated PVC waterproof flame retardant coating cloth. Tent frame: φ38mmx1.2mm welded steel tube Size: L 7.86m,W 4.76m, Wall height 1.75m, Top height 3.12m Packing quantity: 8packages / unit Performance: Gable roof with straight gable wall. One door, one triangle winder, one chimney or air vent on each of the gable wall. There are three Windows on each side of the wall. It can be used with heating furnace. The wall window and the turning corner of the tent are buckled and closed with convenient opening buckle, with good sealing effect. The whole tent is strengthened by pulling the triangle pile. Application : For disaster command, post-disaster emergency medical treatment, temporary school quarters, storage of disaster relief materials and personnel accommodation, etc.</p>

10、 15 m ² disaster inflatable tent	11、 Simple toilet	12、 20 m ² tarpaulin
		
<p>Material: outer tent: 666dtex×666dtex polyester PVC coated oxford; Inner tent: 240T flame resistance white polyester pongee; Ground sheet: 400g/m² double side PVC coated fabric.</p> <p>Size: L 5.42m, W3.45m, Side height1.9m, Top height 2.55m.</p> <p>Component: Tent body(with rope), inflatable pipe and accessories (Including electric air pump, manual air pump,pegs, packing bag, etc)</p> <p>Performance: Usable area is 15 m², which can accommodate 7-8 people.It can be safely used under dead weight and level 8 wind load, with continuous service life more than 2 years, storage life is 5 years</p> <p>Working temperature: -2</p> <p>Frame wind resistance: 6-8, inflation time: ≤5min,</p> <p>Diameter of the inflation pipe is 200mm,</p> <p>The charging pressure is in the range of 10 to 15PSI. It is used continuously for 7 days without replenishing air.</p> <p>The product use the technology of adhesive bonding and high frequency thermal bonding. The air column use PVC double-sided coating cloth, and the tent fabric use waterproof and ultraviolet resistant material.</p>	<p>Material: Outer tent: 500D milk white double-sided PVC self-cleaning coating; Roof: 500D light sky blue double-sided PVC coated cloth;</p> <p>Frame: φ28mmx1.0mm welded steel tube, φ25mmx1.2mm welded steel pipe, square 30mmx1.5mm welded steel tube and square25mmx1.2mm welded steel tube.</p> <p>Size: L 3.9m, W 2.4m, Wall height 1.9m, Top height 2.66m, screen L 1.1m, W 0.8m;</p> <p>Packing quantity: 5packages / unit</p> <p>Performance: The simple toilet for disaster relief consists of a tent, four sets of squat toilets, one toilet for the disabled, solar lights and accessories. In addition, the simple toilet for men is equipped with three sets of urinals , Gable roof with straight gable wall.Composed of tent body, tent frame and squat toilet, etc. The frame is a plug-type structure with ground rods. There are triangular windows on both sides of the gable. There is space between the perimeter of the side wall and the roof for ventilation, exhaust and lighting; The front and rear walls and side walls are connect together, which is easy to clean to keep the room clean and sanitary. The upper open of the wall is inlaid with φ6m twisting rope connect with tent frame hook; The column position around the wall is equipped with bundling column belt, which is convenient for fixing the tent body; Inside the tent, a hanging chandelier is arranged on the side and the solar power panel placed outside the tent is matched for use. At night, when a person enters the toilet, the light will shine at the activity range (about 1.5m) from the power source, and turn off automatically after the person leaves. Both sides of the inner wall and gable of the tent are connected with the aluminum tent ring on the eaves and the supporting φ5m core rope and the cross bar of the tent, which makes the tent more firm and aesthetics, and can be used safely in the dead weight and force 8 wind.</p> <p>Application: It is mainly used as a temporary toilet tent for victims in the field.</p>	<p>Material: Fabric 333dtex×333dtex polyester single side PVC coated oxford, Φ6mm nylon rope, length 4000mm, Aluminum awning ring 30#.</p> <p>Size: 5000mm×4000mm</p> <p>Packing size: 560mm×300mm×300mm。</p> <p>Packing quantity: 5 units / package</p> <p>Performance: The tarpaulin is made of PVC coated fabric, which is stitched by the stitching technology. The stitching is made with 29×3 polyester thread double-needle machine, and the pin density is 9-11 needles /30mm. PVC heat sealing rubber strips are pasted inside the seam to cover the stitching needle eyes The edges of the tarpaulin are studded with aluminum canopy rings, which are used to connect the drawing ropes</p> <p>Application: Used to cover items from wind, rain and sunlight, can also be used in camping tents on the ground to protect against moisture, etc</p>

13、 12 m ² cotton tent	14、 37 m ² grid command tent	15、 60 m ² grid command tent
		
<p>Material: Fabric is 666dtex×666dtex silver gray polyester PVC coated fabric; Frame: Q235 Φ25mm×1.2mm and Q235 Φ28mm×1.0mm</p> <p>Size: 3.7m in length, 3.2m in width, 1.75m in side height and 2.67m; in top height;</p> <p>Packing size: 1100mm×320mm×320mm ; ; 1830mm×210mm×180mm ; 1300mm×430mm×390mm</p> <p>Packing quantity: 3 packages / unit.</p> <p>Performance: 1. The tent is a rectangular double-slope straight wall building structure, with an open gable at one end, an air bucket in the middle of the door, a chimney opening at the corresponding position of the gable at the other end, and two windows on each side wall.</p> <p>The frame is of plug-in structure and is provided with a floor rail. It can be safely used under self-weight and 8-level wind force.</p> <p>The tent is simple in structure, convenient and quick to erect and retract. 5 min/6 people can complete the erection, and 10min/6 people can complete the retraction.</p> <p>Application: For the resettlement of the affected people in plain areas. It can accommodate about 5 people for temporary living.</p>	<p>Material: Fabric: 2X2 white silver-coated Oxford cloth; Awning: 1×1 white waterproof Oxford cloth, ground sheet: 400g/m2 double-sided coated PVC waterproof fabric; Frame: medium 16X0.8mm aluminum alloy tube, medium 20X1.5mm aluminum alloy tube, PAI 66, etc.</p> <p>Specifications: outer tent length 11.8m, width 4.1m, height 3.16m, side wall height 1.54m, inner tent length 11.2m, width 3.5m, height 2.66m and side wall height 1.54m.</p> <p>Packing size: 2000X800X 1000mm;</p> <p>Packing quantity: 1 package / unit</p> <p>Performance: The tent is a folding space grid structure, which can be used normally under 8-level wind or 8cm snow load; It is used in the south and north, and can be erected and retracted all day; It can be combined into a multi-purpose tent group according to needs to meet the needs of different users such as accommodation, office, command and medical treatment. The main body of the tent is integrated, and the whole tent can be erected or retracted within 10 minutes.</p> <p>Application: For troops to set up field hospitals and command posts in the wild, and as special tents for professional detachments such as confidential information and communication.</p>	<p>Main material: Fabric: 2×2 white silver-coated Oxford cloth; Inner canopy: 1X1 white waterproof Oxford cloth; ground sheet: 3400g/m2 double-sided coated PVC waterproof cloth; Frame: medium 16X0.8mm aluminum alloy tube, medium 20×1.5mm aluminum alloy tube, PAI66, etc.</p> <p>Size: the outer tent is 12.11 m long, 6.1m wide, 3.37m high, the side wall is 1.79m high, the inner tent is 11.83 m long, 5.5m wide, 42.62 m high and the side wall is 1.62m high.</p> <p>Packing size: 1800×900X1140mm;</p> <p>Packing quantity: 1 package / unit</p> <p>Performance: The tent is a folding space grid structure, which can be used normally under 8-level wind or 8cm snow load; It is used in the south and north, and can be erected and retracted all day; It can be combined into a multi-purpose tent group according to needs to meet the needs of different users such as accommodation, office, command and medical treatment. The main body of the tent is integrated, and the whole tent can be erected or retracted within 10 minutes.</p> <p>Application: For troops to set up field hospitals and command posts in the wild, and as special tents for professional detachments such as confidential information and communication.</p>

16、 Bathing tent suit

Material: The main material is 2 × 2 white silver-coated Oxford cloth, and the frame is made of white plastic-sprayed square 30 × 1.2 welded steel tube and square 25 × 1.2 welded steel tube. The tent is equipped with a floor cloth, a 20L solar camping shower bag, and the tent roof is equipped with a fastening belt to fix the shower bag. The roof is provided with a water inlet and a curtain cloth to prevent water leakage.

Size: L=1.22m, W=1.22m, Front height= 2.3m, rear height= 2.2m.

Weight: about 80kg.

Volume: about 0.33m³

Erection and retraction: 10min/2 people can complete erection and 8min/2 people can complete retraction.

Application: It provides a bathing place in the wild, and can be used in the environment without water or electricity.

Performance: Tent is in the form of single slope and straight wall. It is a frame tube fitting insertion structure. There are 1 set of bathing pedals and 2 water bag supporting frames in the tent. The side wall of the canopy body and the canopy top are sewn into an integrated structure, the side wall is sewn with 2 × 2 white silver-coated Oxford cloth, and the rear side is provided with a ventilation window; The front fence door is sealed with nylon zipper, and a safety hook is sewn at the lower opening on the inner side of the door, which can be fixed with the pull tab, so as to ensure the privacy of users after the door is closed. The fence is diagonally opened and closed with velcro and lace, and the frame is connected with the awning body by tie-columns. The corners of the eaves are provided with triangular rings with tubes, and the pull ropes are fixed with the ground piles through the triangular rings, so that the tent can be safely used under self-weight and 8-level wind force.

17、 42 m² inflatable tent

Material: The main material of the outer tent is 1100D white double side PVC coated fabric, and the inner tent is 260T white taffeta.

Usable area: 42 m²;

Working capacity: 42 square meters inflatable tent can be used by 8~10 people for office work; It can accommodate 8~10 people.

Size: length 8.4m, width 5m, side height 1.8m and top height 2.97m

Gas column diameter: Φ 240mm; 5)

Window size: 800mm (width) X 600mm (height);

Door size: 1800mm (width) × 1950mm (height);

Packing: 1400mm (length) X 1100mm (width) X 900mm (height)

Erection time: < 11min/2~3 people;

Withdrawal time: < 8min/2~3 people;

Working pressure: 18Kpa~23Kpa;

Continuous service life: > 2 years;

Under the normal use of the tent, the air column support time is > 7 days.

Performance: There are 8 windows in the tent, and mosquito-proof screen windows are arranged at the windows. The window positions of the two side walls are in one-to-one correspondence, thus forming convection, which can meet the requirements of ventilation, exhaust and lighting in the tent. The design of screen windows can meet the mosquito invasion in summer, which makes the office and living performance excellent. And connecting channels are opened at the corresponding windows of the two side walls.

18、 21.11 m² grid command tent

Main material: Fabric: 2×2 silver-coated camouflage waterproof Oxford cloth; Inner layer: 1X1 white waterproof Oxford cloth; ground sheet: 400g/m² grass green double-sided plastic coated cloth, frame: medium 16X0.8mm aluminum alloy tube, medium 20×1.5mm aluminum alloy tube, PAI 66, etc.

Size: Outer tent length 7.18m, width 4.1m, height 3.16m, side height 1.54m, inner tent length 6.58m, width 3.5m, height 2.66m, side wall height 1.54m.

Packing size : 1800X600X800mm.

Packing quantity: 1 package / unit

Performance: The tent is a folding space grid structure, which can be used normally under 8-level wind or 8cm snow load; It is used in the south and north, and can be erected and retracted all day; It can be combined into a multi-purpose tent group according to needs to meet the needs of different users such as accommodation, office, command and medical treatment. The main body of the tent is integrated, and the whole tent can be erected or retracted within 10 minutes.

Application: It can be used for troops to set up field hospitals and command posts in the wild, and as a special tent for professional detachments such as confidential information and communication.

19、 28 m² inflatable tent

Material: The main material of the outer tent is 1100D white double side PVC coated fabric, and the inner tent 260T white taffeta..

Operation and basic functional indicators

Usage area: 28 m²;

Working capacity: The 28 m² inflatable tent can be used by 6~8 people for office work and 6~8 people for accommodation.

Expansion and centering dimensions: 6m in length, 5m in width, 1.8m in side height and 2.97m in top height;

Gas column diameter: φ240mm;

Window size: 800mm (width) X600mm (height);

Door size: 1800mm (width) X1950mm (height);

Packing size: 1200mm (length) X900mm (width) x ×725mm (height);

Erection time: < 5min/4~6 people;

Withdrawal time: < 5min/4~6 people;


Working pressure: 18Kpa~23Kpa; 11) Continuous service life: > 2 years; 12) Under the normal use of the tent, the air column support time is > 7 days.

Performance: There are 6 windows in the tent, and mosquito-proof screen windows are arranged at the windows. The windows on the two side walls are in one-to-one correspondence, thus forming convection, which can meet the requirements of ventilation, exhaust and lighting in the tent. The design of screen windows can meet the mosquito invasion in summer, which makes the office and living performance excellent. And connecting channels are arranged at the middle windows of the two side walls.

20、 Awning tent	21、 10-person rescue tent	22、 Disaster relief tents
		
<p>Material: The main material is 2x2 white silver-coated Oxford cloth.</p> <p>Size: 4.5m in length, 4.5m in width, 2.63m in roof height and 2.05m in wall height.</p> <p>Weight: 33.25kg</p> <p>Volume: 0.09m³</p> <p>Erection and retraction: erection or retraction can be completed within 15min/4 people.</p> <p>Application: It is mainly used in camping, accommodation and medical conditions.</p> <p>Performance: It has excellent performance in tensile strength, tear resistance, aging resistance, mildew resistance, rain resistance, etc., so its normal service life can reach more than 3 years. After the tent is removed, the packaging shape is more regular. It is convenient for vehicle transportation and warehouse storage. The quality and volume of a single package are suitable for manual loading and unloading and short-distance handling. Tent structure is reasonable, safe and reliable.</p>	<p>Material: Fabric: 320g/m² white polyester-cotton; Curtain: 150D white flame retardant Oxford cloth; Ground sheet: 500Dx500D gray PVC coated;</p> <p>Frame: welded steel tube.</p> <p>Size: 4m in length, 3.6m in width, 1.7m in side height and 2.2m in top height.</p> <p>Packing size: 1250x400x300mm; 1980x230x200mm</p> <p>Total weight: 80.5kg.</p> <p>Total volume: 0.24m³</p> <p>Packing quantity: 2 packages / unit</p> <p>Performance: The tent is in the form of double-slope saddle. The frame is a plug-in frame structure and is provided with a floor rail. There is a door on the gable wall, and there is a screen door at the door; There are two square windows on each side of the wall. Windows, doorways, screen doors are all zipped with 8# zipper which is easy to open. The four corners are connected by straps and buckles. The whole tent is equipped with floor cloth. Unfolding and retracting time: about 15 minutes /6 people.</p> <p>Application: It is mainly used in plain areas to resettle the affected people, and can accommodate about 10 people for temporary residence.</p>	<p>Material: canopy roof: white PVC double-sided coated cloth 510g/m², tent wall: cotton canvas 520g/m², inner canopy/floor mat: 350g/m² double-sided quilted needle felt (finished weight 450g/m²), floor cloth/dragging cloth: gray PVC double-sided coated cloth 510g/m² Tent: $\phi 42 \times 2\text{mm}$ aluminum tube, throughout: nylon material.</p> <p>Dimensions: length 4.1m, width 4.05m, side height 1.94m, top height 2.47m.</p> <p>Product composition: The tent is composed of outer canopy, inner canopy and frame.</p> <p>Product quality: 106kg</p> <p>Packing volume: 2200x500x450mm</p> <p>Number of packages: 1 piece/top</p> <p>Performance: 1. The tent is a double-sloped saddle structure. The frame is plugging-in structure.</p> <p>2. The use area is 16.5m². The total mass is 106kg, and the packaging volume is 0.495m³.</p> <p>3. Assembly time: 30 minutes/6 people.</p> <p>4. The main material of the gable wall and enclosure wall of the tent is pure cotton canvas, the main material of the roof and floor cloth of the outer canopy is white and gray PVC double-sided coated cloth, the main material of the lining is this white double-sided quilted needle felt, and the main material of the tent is made of aluminum alloy tube.</p> <p>Application: 16.5 m² Turkish disaster relief tent is a temporary residential tent. It is used for the resettlement of disaster-stricken people in plain areas</p>

23、 UNHCR 23 m ² family tent	24、 UNHCR dome self-standing family tent
	
<p>Material: canopy roof: 350g/ m² polyester cotton canvas, tent wall: 275g/ m² polyester cotton canvas, inner canopy: 170g/ m² polyester cotton canvas, floor cloth / drag cloth: 180g/ m² PE cloth, pole: φ 25 × 1.2mm, 19 × 1.0mm steel pipe.</p> <p>Size: length 6.6m, width 4.05m, side height 1.94m, top height 2.47m.</p> <p>Product composition: The tent is composed of an outer canopy, an inner canopy and a pole.</p> <p>Product quality: 50kg</p> <p>Packing volume: 1350×400×350mm</p> <p>Number of packages: 1 piece/top</p> <p>Performance: 1. The tent is a pole structure.</p> <p>2. The use area is 23 m².</p> <p>3. Assembly time: 10 minutes/3 people.</p> <p>4. The main materials of the tent outer canopy roof, gable wall and inner canopy are polyester cotton canvas, floor cloth is PE cloth, and the main material of the strut is steel pipe.</p> <p>Application: The UNHCR Family Tent is a temporary residential tent. This is a standard tent used by UNHCR/ICRC/RCRC and is suitable for a family of 5 people, meeting the recommended minimum living area (3.5 m² per person) in hot and temperate climates and providing additional space for cold climates.</p>	<p>Material: outer cover: 190g/ m² PE mesh, tent body: 190g/ m² PE cloth, inner canopy: 130g/ m² polyester cotton canvas, floor cloth / dragging cloth: 190g/ m² PE cloth, strut: 7001-T6 φ 19 × 1.0mm aluminum alloy tube.</p> <p>Dimensions: length 4.3m, width 4.3m, side height 1.93m, top height 2.33m.</p> <p>Product composition: The tent is composed of an outer cover, an outer canopy, an inner canopy, and a pole.</p> <p>Product quality: 50kg</p> <p>Packing volume: 1150×550×450mm</p> <p>Number of packages: 1 piece/top</p> <p>Performance: 1. The tent is a pole structure.</p> <p>2. The use area is 18.5 m².</p> <p>3. Assembly time: 10 minutes/3 people.</p> <p>4. The main materials of the tent outer canopy roof, gable wall and inner canopy are polyester cotton canvas, floor cloth is PE cloth, and the main material of the strut is 7 series aluminum alloy tube.</p> <p>Application: This self-supporting family tent is for UNHCR and is suitable for 5 people. It follows the minimum area used in tropical and temperate climates (3.5 m² per person) and offers additional space for cold climates. Self-supporting family tents are a short-term shelter solution, especially as a support in emergency situations, and cannot replace a more permanent residence.</p>


25、 Folding bed	26、 Oxford folding bed	27、 Air mattress bed
		
<p>Material: Sell fabric:666dtex*666dtex polyester yarns PVC coated cloth. Bed frame:Q195φ25mm*1.1mm welded steel tube.The surface of steel tube is sprayed with white powder. Mattress is PVC plastic plate with dimension 840mm*500mm*4mm.。 Size: 1850×700×350mm Packing size: 960mm×480mm×720mm Packing quantity: 4units /case.。 Performance:Disaster relief special folding bed is steel tube frame folding type. Folding bed is composed by bed surface and bed frame, the head of a bed is attached with a pillow that can be buckled, the upper part of the bed face adds cushion plastic board, plastic board is pushed to the bed tail direction when using, push to the head of a bed direction when folding. The back of the bed is equipped with two adjustable tightening straps. Application: Folding beds are mainly used for medical treatment, post-disaster emergency, temporary rest and accommodation.</p>	<p>Material: Sell fabric:1111dtex*1111dtex sky-blue polyester yarns PU coated cloth, 22*19mm.Wall thickness ≥2.2mm special-shaped aluminum alloy tube. Bed frame:6063 special-shaped aluminum alloy tube, bed frame and bed leg without spraying plastic. Accessories surface with spraying powder. Size: 1850×700×355mm Packing size: 750mm×600mm×740mm Packing quantity: 4units /case. Performance: Bed frame can be folded. The backrest has three adjustable section tilting angles. It takes about 1 minute for one person to unfold. Application : Folding beds are mainly used for medical treatment, post-disaster emergency, temporary rest and accommodation.</p>	<p>Material: 231dtex*231dtex nylon drawn yarn PU coated fabric.。 Size: L 1900× W750× Pillow height 350 × height80mm. Packing size: 530mm×350mm×420mm Packing quantity: 12units / case. Performance: Disaster relief air mattress bed is made of PU coated fabric by high frequency hot pressing, charging and exhaust nozzle are closed on the bed surface by high frequency hot pressing, and the bed surface and pillow are connected into one air chamber. Thermal edge on both sides are riveted three stainless steel awning rings. Application: Mainly used for temporary rest after disaster.</p>

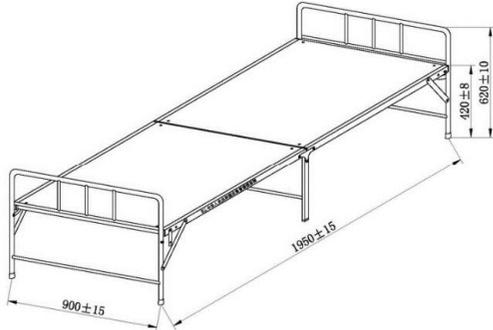
28、 Folding table and stool(ABS)	29、 Folding table and stool(Steel)	30、 Wooden folding bed
		
<p>Material : Table top ABS resin , stool top 666dtex×666dtex polyester PVC coated fabric. Table leg 30 mm×15 mm×1.0 mm aluminum alloy tube.</p> <p>Size: Table 705×675×650mm , stool 300×220×380mm</p> <p>Packing size: 690mm×530mm×390mm</p> <p>Packing quantity: 4units / case.</p> <p>Performance : Plastic folding table top by ABS resin injection molding two symmetrical assembly into a whole body that can be opened and closed. Table leg with aluminum alloy square tube with table top combination, the use of hinge connection so that the table leg can be folded. The folding stool surface is made of PVC coated cloth, and the stool leg is bent with welded steel pipe. After the table is folded, four folding stools are placed on the back of the table, and the table is snapped together to form an integral suitcase.</p>	<p>Material : Table top Q195 t0.8mm steel , stool top 666dtex×666dtex polyester PVC coated fabric. Table leg 30 mm×15 mm×1.0 mm aluminum alloy tube.</p> <p>Size: Table 705×675×650mm , stool 300×220×380mm</p> <p>Packing size: 705mm×215mm×370mm</p> <p>Packing quantity: 2set / case.</p> <p>Performance : The disaster relief folding table consists of a table and four stools. The surface of the table is made of two symmetrical pieces formed by stamping cold-rolled steel plate and assembled into a whole body that can be opened and closed. Table leg with aluminum alloy square tube with table top combination, the use of hinge connection so that the table leg can be folded. The folding stool surface is made of PVC coated cloth, and the stool leg is bent with welded steel pipe. After the table is folded, four folding stools are placed on the back of the table, and the table is snapped together to form an integral suitcase.</p>	<p>Material: Bed with 8.0 mm±1.0 mm wood primary color plywood, frame Q215 40 mm×20 mm×1.2 mm and 25 mm×25 mm×1.2 mm steel tube, with sky color.</p> <p>Size: 1950×900×420×620mm</p> <p>Packing size: 965mm×920mm×160mm</p> <p>Packing quantity: 1unit / case.</p> <p>Performance: L 1950 mm, W 900mm, front height 620mm, rear height 420mm. Unfold time 2mins /2people。 It can be used continuously for more than 2 years.</p> <p>Application : Folding beds are mainly used for medical treatment, post-disaster emergency, temporary rest and accommodation.</p>

31、 Folding bed	32、 Folding camp bed	33、 Folding bed
		
<p>Material: Bed surface: 600D sapphire blue PVC polyester coated, frame: welded steel tube.</p> <p>Size: 1.90m in length, 0.80m in width and 0.36m in height</p> <p>Total weight: 52kg/ carton</p> <p>Total volume: 0.388m³, package size: 985×480×820mm.</p> <p>Number of packages: 4 sheets/box</p> <p>Function: Folding bed consists of bed surface and bed frame. A pillow with a buckle is attached to the bedside; There is a patch pocket in the upper part of the bed head, a plastic plate is installed in the patch pocket, and the instructions for sewing the plastic plate on the patch pocket cover (printed on white polyester washed cloth).</p> <p>Application: It is mainly used for disaster relief command, post-disaster emergency, medical treatment, temporary accommodation, rescue of the wounded and sick, etc.</p>	<p>Material: Bed surface: 666tex×666tex white polyester PVC coated cloth; Frame: square 25×1.2 welded steel tube.</p> <p>Size: 1.9m long, 0.65m wide and 0.42m high;</p> <p>Product: Folding camp bed is composed of bed surface and bed frame;</p> <p>Total weight: 25kg/ case;</p> <p>Packing size: 1000×450×150mm; ;</p> <p>Number of packages: 2 pieces/box</p> <p>Performance: The folding camp bed is a steel tube folding structure. When in use, it can be unfolded, and when not in use, it can be folded and stored, saving space, small size and convenient to carry.</p> <p>Application: It is mainly used for disaster relief command, post-disaster emergency, medical treatment, temporary accommodation, rescue of the wounded and sick, etc.</p>	<p>Material: Bed surface: 9mm thick glued laminated board; Frame: 40×20×1.0mm, 25×25×1.2mm and 20×20×1.2mm welded steel tubes.</p> <p>Size: 1.95m long, 0.77m wide, 0.64m high in front and 0.58m high in back.</p> <p>Packing size: 1020mm×770mm×160mm.</p> <p>Number of packages: 1 unit / carton</p> <p>Ability: 1. Being able to meet the accommodation needs of one person; Adopt mechanical four-bar linkage; Under the ambient temperature of -40°C ~ 46°C, all parts have no abnormal changes, which can meet the normal erection and retraction operation.</p> <p>2. The use area is 1.5± 0.2 m².</p> <p>3. Erection and retraction time, 1 min/2 people.</p> <p>Application: for disaster relief camping accommodation.</p>

34、 Knapsack	35、 Family emergency kit	36、 Soft water storage tank
		
<p>Material: Fabric: 666dtex*666dtex polyester PVC coated.。</p> <p>Size: 500×400bottom (320top) ×180bottom (160top) mm</p> <p>Packing size: 590mm×390mm×420mm</p> <p>Packing quantity: 30 sets / case.。</p> <p>Performance : Knapsack for disaster relief consists of front bag, side bag, bag body, bottom bag and backpack straps.</p> <p>Application: For storing disaster-relief supplies</p>	<p>Material: The empty package is made of blue polyester 28 needle woven fabric shell fabric, EVA5mm75 degrees</p> <p>Size: 350mm×330mm×210mm</p> <p>Packing size: L 670mm×W 370 mm×H 440mm</p> <p>Packing quantity: 30 sets / case.。</p> <p>Performance : The family emergency kit consists of the following four categories of supplies :</p> <ul style="list-style-type: none"> A) Tableware:a rice bowl, chopsticks and a glass with cover; B) Daily necessities: towels, soap, folding buckets, slippers and nail clippers; C) Protection category: folding umbrella; D) Packaging: external packaging of emergency kit.. 	<p>Material: Fabric:666dtex*666dtex*0.15mm film thickness food grade TPU double-sided pasting film oxford</p> <p>Size: 0.5 m³ : Φ800×Φ1280×600mm</p> <p>1m³: Φ980×Φ1540×700mm</p> <p>Packing size: 0.5 m³ : 600 mm×500 mm×400mm (L×W×H)</p> <p>1m³: 1600 mm×500 mm×500mm (L×W×H);</p> <p>Packing quantity: 30 sets / case.。</p> <p>Performance: The soft water storage tank consists of a cover, a tank body and a floor pad. The basic fabric color of soft water storage tank is sky blue, and the film color is colorless and transparent.</p> <p>Ambient temperature of water storage tank: 0℃~ 40℃;</p> <p>Storage ambient temperature: -20℃to 30℃.</p> <p>Application: Storing drinking water</p>

37、 Summer quilt	38、 Towel blanket	39、 Polyester blanket
		
<p>Material : Fabric is 9.8tex / 9.8tex cotton printed satin, the filling material is 3.33dtex three dimensional crimp hollow polyester fiber (more than 20%), 1.33dtex fine denier polyester (with silicone oil) more than 60%, the rest of the low melting point polyester.</p> <p>Size: 2000mm×1500mm</p> <p>Packing size: L 580mm×W 380mm×H 500mm</p> <p>Packing quantity: 10sets / case。</p> <p>Performance: The summer quilt is made of pure cotton and filled with polyester fiber. The color is light and elegant printing with light blue as the main color. The weight is 1100g.</p>	<p>Material: 21s combed compact cotton yarn</p> <p>Size: 2000mm×1500mm</p> <p>Packing size: L 580mm×W 380mm×H 500mm</p> <p>Packing quantity: 20units / case。</p> <p>Performance : The disaster relief towel is rectangular, double-sided loop structure, 21s combed compact cotton yarn, the color is simple and elegant plain, weight 1000g.</p>	<p>Material: Pile yarn: 333dtex /144F polyester yarn, base yarn: 111dtex /36F polyester filament yarn.</p> <p>Size: 2000mm×1500mm</p> <p>Packing size: L 570mm×W 690mm×H 820mm</p> <p>Packing quantity: 10units / case。</p> <p>Performance: The polyester blanket is a rectangular, double-stitched fabric with no filler inside. It is made of raschel warp knitting process and weighs 2500g.</p>

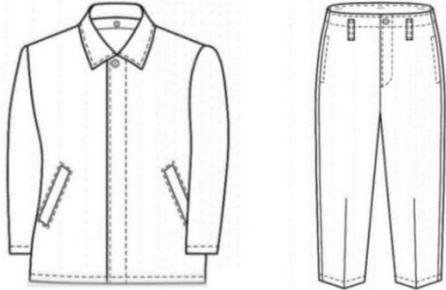40、 Cotton quilt (2010 standard)	41、 Wadded cushion	42、 Cotton coat
		
<p>Material: Cover with 14.5tex/14.5tex light blue printed cotton twill, quilt with hollow polyester fiber or grade 4 cotton.</p> <p>Size: Cover 2200mm×1500mm, quilt 2100mm×1450mm</p> <p>Packing size: 750mm×550mm×450mm (L×W×H)</p> <p>Packing quantity: 5sets / package.</p> <p>Performance: 2010 standard: The disaster relief quilt is rectangular, detachable, quilt is formability. The quilt core is made by quilting process (fiber) and filled with hollow polyester short fiber, 1250g in warm zone and 2000g in cold zone. Cotton: warm area 2500g, cold area 3800g, total weight 2500g including the core quilt cloth, does not contain quilt cover, outer packing material with polypropylene woven cloth, lined with kraft paper</p> <p>New standard: Fiber quilt weight: 1000g in warm zone, 1250g in cold zone, 1500g in high cold zone; Cotton quilt weight: 2000g in warm zone, 2500g in cold zone, 3000g in high cold zone; Fiber filler: 15 sets per pack in warm area, 10 sets per pack in cold area and high cold area; Cotton filler: 10 sets per pack in warm area, 5 sets per pack in cold area and high cold area</p>	<p>Material: The shell fabric is made of 18tes*18tex cotton printed plain cloth, and the tick are made of white cotton grade 1-4. Lighter spotted grade 1 -2.</p> <p>Size: 2000mm×900mm</p> <p>Packing size: 750mm×550mm×450mm (L×W×H)</p> <p>Packing quantity: 15 set / case.</p> <p>Performance: The cover fabric and lining are pure cotton printed plain cloth, filled with cotton fiber. Weight is 1250g. The outer packing material is polypropylene woven cloth, lined with kraft paper.</p>	<p>Material: Fabric 14tex*2/28tex polyester cotton khaki/pure cotton khaki, filled with hollow polyester staple floss or cotton.</p> <p>Size: Large, medium, small. Three sizes.</p> <p>Packing size: 650mm×450mm×350mm (L×W×H)</p> <p>Packing quantity: 10 sets / case.</p> <p>Performance: Each set of products includes 1 cotton coat, 1 cotton trousers. In the warm region, 300g/m² hollow polyester staple fiber floss was used, and in the cold region, 400g/m² hollow polyester staple fiber floss was used. At least 1000g/ set of grade 3 cotton should be used in warm region, and at least 1300g/ set of grade 3 cotton should be used in cold region. Each 10 sets of cotton coat and trousers are bundled into a package with polypropylene woven fabric.</p>

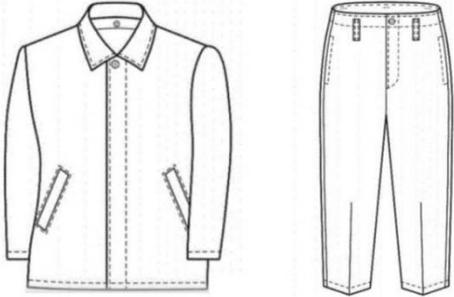43、 Winter cotton overcoat	44、 Cotton overcoat	45、 Cotton coat
		
<p>Material : The fabric is polyester-cotton 80/20 29.5tex*2/59tex dark blue polyester-cotton calender canvas.</p> <p>Front, back and sleeve insulation layers:200g/ m² far-infrared composite polyester compressed soft cotton, 80g/ m² micro-fine POLYPROPYLENE melt-blown cotton。</p> <p>Size: Large, medium, small.</p> <p>Packing size: 800mm×600mm×400mm (L×W×H)</p> <p>Packing quantity: 10units / package</p> <p>Performance: 10 pieces in a carton. Each package contains 3 pieces large size, 3 pieces small size and 4 pieces medium size.</p>	<p>Material: The fabric is made of 185T single-sided PU waterproof nylon tower velvet, the body insulation layer is made of 250g/ m² filled polyester staple fiber, and the sleeve insulation layer is made of 150g/m² filled polyester staple fiber.</p> <p>Size: Large, medium, small.</p> <p>Packing size: 650mm×450mm×350mm (L×W×H)</p> <p>Packing quantity: 10units / package</p> <p>Performance : The coat fabric color is brown, color number is PANTONE 19-1217TPX. The cotton coat is wrapped with polypropylene woven cloth. There are 3 large, 3 small and 4 medium size coats in each package.</p>	<p>Material: Fabric 14tex*2/28tex polyester cotton khaki/pure cotton khaki, filled with hollow polyester fiber or cotton.</p> <p>Size: Large, medium, small.</p> <p>Packing size: 650mm×450mm×350mm (L×W×H)</p> <p>Packing quantity: 10units / package</p> <p>Performance : Each set of products includes 1 cotton coat, 1 cotton trousers. In the warm region, 300g/m² hollow polyester staple fiber floss was used, and in the cold region, 400g/m² hollow polyester staple fiber floss was used. At least 1000g/ set of grade 3 cotton should be used in warm region, and at least 1300g/ set of grade 3 cotton should be used in cold region. Each 10 sets of cotton coat and trousers are bundled into a package with polypropylene woven fabric.</p>

46、 Army green cotton overcoat(87 type)	47、 Multi-functional sleeping bag	48、 Site lighting
		
<p>Material: Fabric:army green poly-cotton, T / C: 80 / 20, density 27.8×27.8tex, filler with cotton (made of white cotton grade 1-4. Lighter spotted grade 1 -2).</p> <p>Size: Large, medium, small.</p> <p>Packing size: 65cm×45cm×35cm (L×W×H)</p> <p>Packing quantity: 10 units / package.</p> <p>Weight: 2500g.</p>	<p>Material: Fabric 120g/m² sky polyester waterproof oxford, filler with 150g/m² hollow polyester fiber</p> <p>Size: Large, small, child size</p> <p>Packing size: 1400mm×750mm×550mm (L×W×H)</p> <p>Packing quantity: 24 units / package.</p> <p>Performance: Disaster relief special multi-functional sleeping bag by the top two sleeves and the bottom of the sleeping bag is composed of four parts, with two functions of sleeping bag and cotton coat will be connected to the top and two sleeves to form a cotton coat closed armhole, connected to the bottom of the top and the bottom of the sleeping bag, and then the two sleeves rolled into the hat lining bag to form a sleeping bag</p>	<p>Packing quantity: 1 unit / case.</p> <p>Specification:</p> <p>Nominal voltage: 220v</p> <p>Operating voltage: 220v</p> <p>Luminous flux: 10000/m</p> <p>Average useful life: 3000h</p> <p>Generator: gasoline engine 3000w, Can connect to city electricity</p> <p>Power: 4*500w</p> <p>Adjustment height: 1.8~4.5m</p> <p>Light coverage radius: 45-65m</p>

OUTDOOR SUPPLIES



1、 Oxford Cloth Indian Tent	2、 Indian Tent + Diamond Canopy	3、 Cottage Cotton Tent Medium Size
		
<p>Size: 2.2*2.2*2m beige Storage size : 73.2*27*19.3 Weight: 7.6kg Capacity: 3-4 people Material: 150D high strength oxford cloth, waterproof about PU2000mm, iron *4, floor nails: φ6*220 iron 7 nails *4 Box size: 72.5*22*16/1pcs</p>	<p>Size: tent 220*220*200, diamond canopy 500*400 Storage size : 73.2*27*19.3 Weight: 11.6kg Capacity: 3-4 people Material: Tent: φ19mm*2.69m iron*4 Sky screen: φ19mm*2.5m iron*2 Tent nails: φ6*220 iron 7-figure nails *4 Sky nails: φ6*220 iron 7 nails *6 Wind rope: black and white φ4mm*4m*6 Carton size: 12kg</p>	<p>Size: 260*210*150 Storage size : 67*31*32 Weight: 13kg Capacity: 3-4 people Material: Flysheet: 210gsm TC cotton waterproof and mildew-proof, hydrostatic pressure about 500mm; White polyester mesh, bottom tent: 500gsm PVC mesh cloth, waterproof PU5000mm+ φ 19mm*1.5m three-section galvanized iron *2 (fiber rod 6mm*51cm*4 at the window), ground nails: φ6*220 iron 7-figure nails *20, wind rope: white with reflective wire 2-hole aluminum alloy buckle, φ6mm*2.4m*8, 6mm*4m*4</p>


4、 Yurt Bell Tent 4m	5、 3m Pyramid Cotton Tent	6、 Terylene Tent
		
<p>Size: 400*400*250 Storage size : 90*30*30 Weight: 24.4kg Capacity: 5-8 people Material: Flysheet: 210gsm TC cotton waterproof and mildew-proof, hydrostatic pressure approx 500mm ; white polyester mesh; Bottom account: 500gsm PVC mesh cloth, waterproof PU5000mm+ Center iron *1, foyer A-bar *1 Ground nails: ϕ8*250 screw-thread steel *10 + ϕ6*220 iron 7 type, pegs*10 Wind rope: white with reflective wire 2-hole aluminum alloy buckle ϕ 6mm*? M*10 roots</p>	<p>Size: 300*300*250 Storage size : 76*31*26 Weight: 13.6kg Capacity: 3-5 people Material: Flysheet: 210gsm TC cotton waterproof and mildew-proof, hydrostatic pressure about 500mm Bottom account: 500gsm PVC mesh cloth, waterproof PU5000mm+ Electroplated pole *1, pegs *26, rope *14</p>	<p>Size: 310*260*210 Internal account: 290*218*207 Storage size : 84*20*22cm Weight: 18.2kg Capacity: 3-5 people Material: Flysheet: Beige 210g TC cotton waterproof and mildew-proof, hydrostatic pressure about 500mm+210D brown encrypted oxford cloth PU2000+, 40g black mesh Inner tent: 100g polyester cotton hydrostatic pressure about 500mm+210D olive green Oxford cloth PU3000+, black mesh Iron (plastic connection sleeve) top connecting rod *3, middle connecting rod *4, side support rod *4) Ground nails: ϕ7*250 iron 7 type pegs *4, black and white ϕ4mm*4m*4 PCs</p>

7、 Small Cotton Shelter (Iron)	8、 Cotton Pentagon Indian Tent	9、 Terylene Indian Tent Large Size
		
<p>Size: 360*200*115 Internal tent 210*80*100cm Storage size: 45*25*20cm Weight: 5.8kg Capacity: 1-2 people Material: Flysheet: 210gsm TC cotton waterproof and mildew-proof, hydrostatic pressure about 500mm Inner tent: black B3 mesh; Base account: 300D Oxford cloth Iron $\phi 16 \times 115$cm(wall thickness 1.0mm) *2, pegs: $\phi 6 \times 220$ iron 7type pegs *22 Wind rope: white with reflective wire 2-hole aluminum alloy buckle; $\phi 4$mm*2m*4 PCs, 4mm*2.5m*2 PCs</p>	<p>Size: 420*420*280 Storage size : 68*25*28cm Weight: 12kg Capacity:/ Material: Flysheet: 210gsm TC cotton waterproof and mildew-proof, hydrostatic pressure about 500mm Hardcore*1 pegs *10 Wind rope *5</p>	<p>Size: 300*250*220 Storage size : 68*25*25cm Weight: 17kg Capacity: 3-5 people Material: Flysheet: 210gsm TC cotton waterproof and mildew-proof, hydrostatic pressure about 500mm; white polyester mesh; Base account: 400D oxford cloth, PU3000mm; $\phi 19$mm iron Tent pole: 310cm*4, awning pole: 177cm*2, pegs*10, ropes*6</p>

10、 Outdoor tunnel tent	11、 Tunnel Camping Tent	12、 Three-pole tunnel tent
		
<p>Size: 505*300*190 Storage size: 122*32*32cm Weight: 30.5kg Capacity: 4-6 people Material: 210D oxford cloth / can be customized on request Waterproof: more than 3000 Struts: Aluminum Product accessories: tent, aluminum main pole*6, adjusting aluminium pole*6, reinforced pegs*25, storage bag Color: off-white, customized; LOGO: Customized</p>	<p>Size: 255*440*182 Storage size : 70x32x32cm Weight: 13.2kg Capacity: 3-5 people Material: Fabric: polyester 75D Waterproof: 2000mm Strut: Aluminum alloy (φ16, 14.5, 13mm) Color: sand tea, customized; LOGO: Customized</p>	<p>Size: 670*380*195 Storage size : 72*30*28cm Weight: 15kg Capacity: 3-5 people Material: Fabric: 210D encrypted oxford cloth Waterproof: 3000 LOGO: Customized Struts: 7001 aluminum alloy tent pole*3 Product accessories: wind rope *10, luminous pegs *4, tent pole *3, 2m support pole *2, outer bag</p>

13、 Double Layer Tent	14、 One Room Outdoor Tent	15、 Two bedroom one living room tent
		
<p>Size: 660*380*205</p> <p>Storage size : /</p> <p>Weight: 26kg</p> <p>Capacity: 8 people</p> <p>Material: double tent, aluminum rod,</p> <p>Space structure one bedroom and one hall, the waterproof coefficient of the flysheet is 2000-3000mm, 190T polyester fabric.</p>	<p>Size: 305*305*200</p> <p>Storage size : 72*30*28cm</p> <p>Weight: 20kg</p> <p>Capacity: 3-4 people</p> <p>Material: Single layer tent, Aluminum rod</p> <p>Space structure one room, flysheet waterproof 2000-3000mm, cotton cloth</p>	<p>Size: 330*210*185</p> <p>Storage size : 65*25*25cm</p> <p>Weight: 10kg</p> <p>Capacity: 4-6 people</p> <p>Material: 150D coated PU oxford cloth</p> <p>Effective water resistance 1500mm SPF 50+</p> <p>Waterproof PE cloth Pu3000mm at the bottom of the tent</p> <p>Fiberglass rod + lacquered black iron</p> <p>Pegs * 14 windproof ropes * 8 strut sets * 1 piece</p>

16、 Cotton house inflatable tent	17、 7 m ² Camping Inflatable Tent	18、 4.4*4.4M butterfly canopy
		<p>流沙金款六角蝶形天幕</p>  <p>外套 一副撑杆 天幕布 地钉×8 风绳×6</p>
<p>Size: 410*270*200cm Storage size : 80*48*60cm Weight: 32kg Capacity: 2-4 people Material: Flysheet - blended cotton Base Ledger - Wear-resistant PVC Mesh Fabric Mesh - polyester mesh Air column - TPU Zipper-YKK stitching-expansion thread Product accessories: 200cm aluminum alloy support rod *3 (diameter 22mm), 25cm pegs *21, wind ropes *10, pump *1</p>	<p>Size: 3.36m*2.26m*2m Storage size: 1.0m*0.4m*0.35m Weight: 26kg Capacity: 1-2 people Material: Outer tarpaulin: khaki oxford cloth, air column material: 550g/m², floor cloth: 450g gray PVC Ground brazing: 4 x 400mm long, hammer: 1, anchor rope: 4, rope tightener: 4 Inflating device: foot pump, air column diameter: 130mm, window: 870mm*640mm a total of four 1200mm*600mm a total of 2 doors, door: two 1480mm*1000mm Tent inflation time: 3-5min, tent wind resistance level: ≤8 or less</p>	<p>Size: 440*440CM Storage size : 65*15*15CM Weight: 4kg Capacity:/ Material: The cloth is made of 210D coated silver waterproof cloth; Accessories: 2 10M wind ropes, 4 3.5M orange wind ropes 8+6*200 pegs 1+ 25MM tube 2.4m struts.</p>

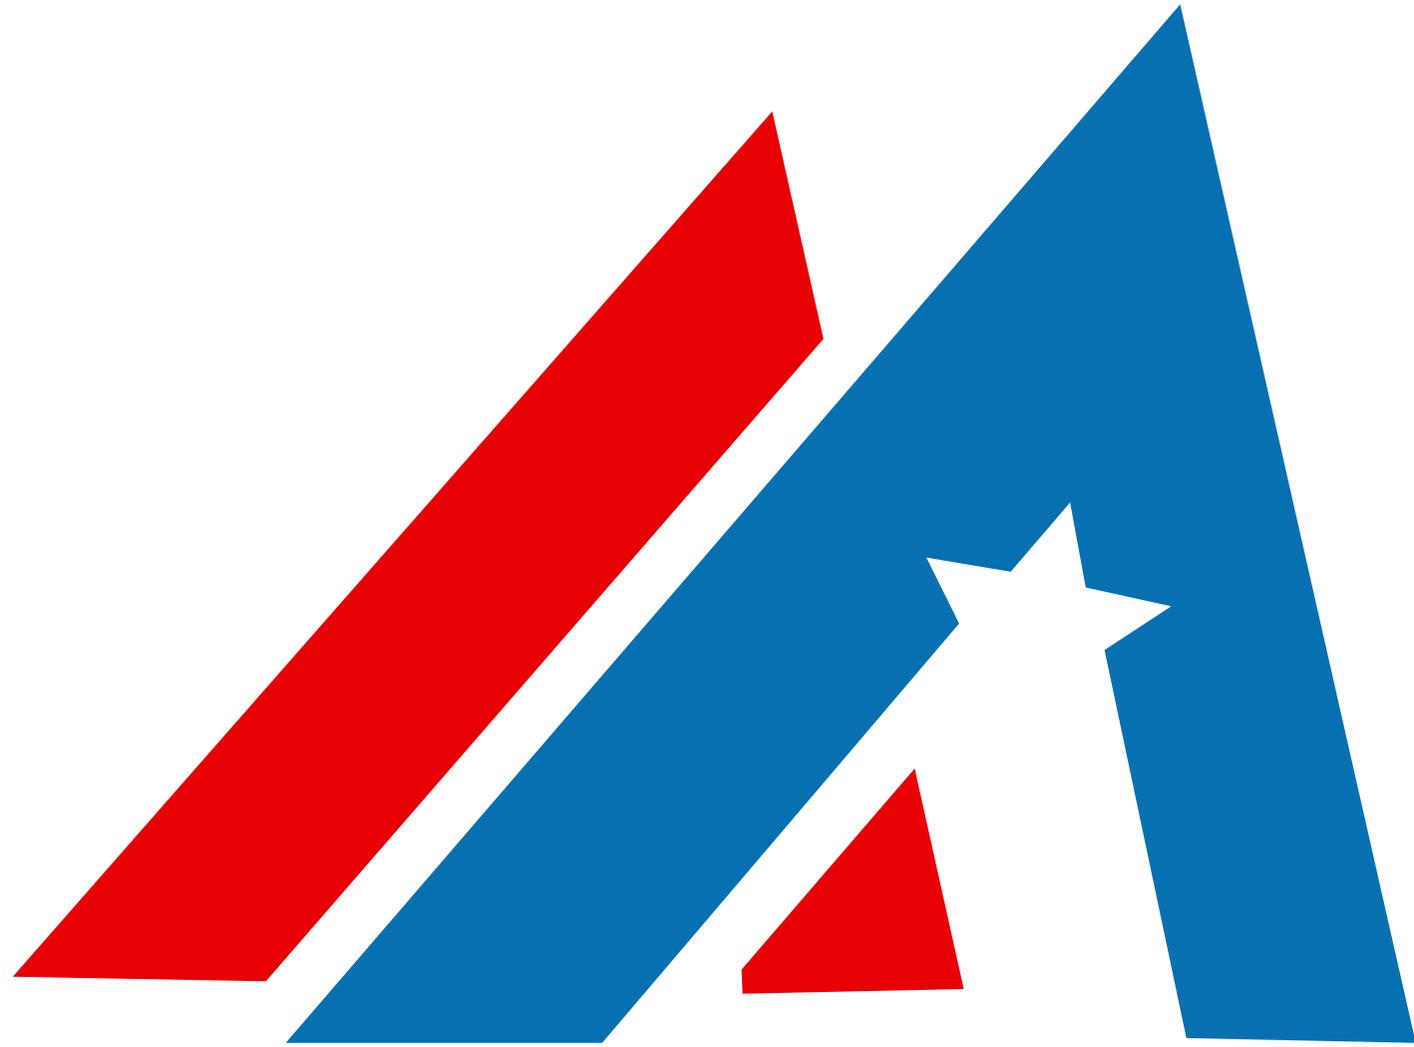

Address : No.439-5, North Second Ring, Northern Industrial Area, Haigang District, Qinhuangdao City, Hebei Province, China.066000.
Tel : 0086 335 3643879/ 3619238/ 3867011
Mobile : 0086 150 3233 1628/ 186 0339 5121
Email : sales@qhd3524.com